

Sales Outline Drawing

Revision **A**


Specifications:

| | |
|----------------------------------|-----------------------------------|
| Oscillation Frequency (Hz) | 2600 ± 200 |
| Operating Voltage (Vp-p) | 1.1 ~ 3.0 |
| Rated Voltage (Vp-p) | 1.5 |
| Current Consumption Max. (mA) | 30 at Rated Voltage |
| Sound Pressure Level (dB/min) | 85 at 10cm at Rated Voltage |
| Coil Resistance (Ω) | 15 ± 3 |
| Operating Temperature (°C) | -30 ~ +70 |
| Storage Temperature (°C) | -40 ~ +80 |
| Lead Pin | Tin Plated Brass |
| Housing | PPO plastic resin (Color : Black) |
| Weight (Grams) | 1.6 |
| Condition by wave soldering (°C) | 245 ± 5 / 3 ± 0.5 sec |
| Condition by hand soldering (°C) | 350 ± 20 / within 5 sec |
| Options | For other options contact factory |


PS: Vp-p = 1/2duty, square wave

RoHS Compliant

Dimensions: (units: mm)

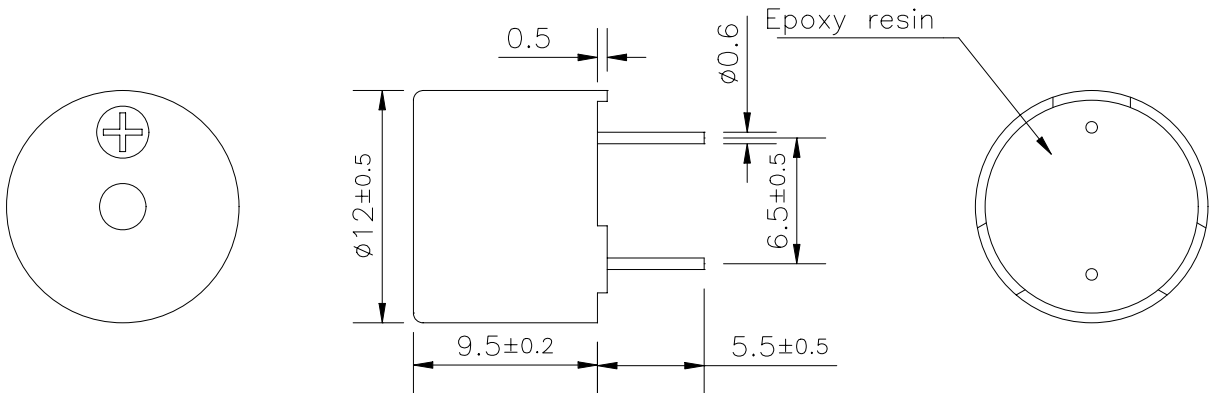

Recommended Driving Circuit:

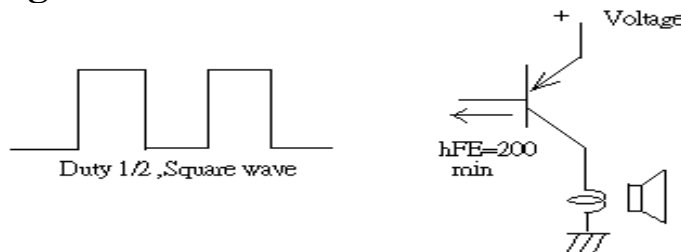

The base current I_b should be high enough so that it saturates the collector current of the transistor with the CB load.