

# MENDA

[Menda Catalog](#) > [Tools](#) > [Probes](#) > [Wooden and Nylon Prober Tools](#) >

## **35622 - PROBE, NYLON, POINT- BLADE, 6IN**




Quantity in  
stock: 1502

- Wood/nylon finish will not mar delicate surfaces
- Ideal material for use in ESD protected areas
- Temperature resistant - material will not melt
- Ideal for opening plastic cases
- Great tool to pop out batteries
- Ideal tool to separate two PCBs without damaging the etch on the multi-layer boards
- Made in America

### **Drawings**

[35622](#) - Prober, Soldering Tool,  
Nylon

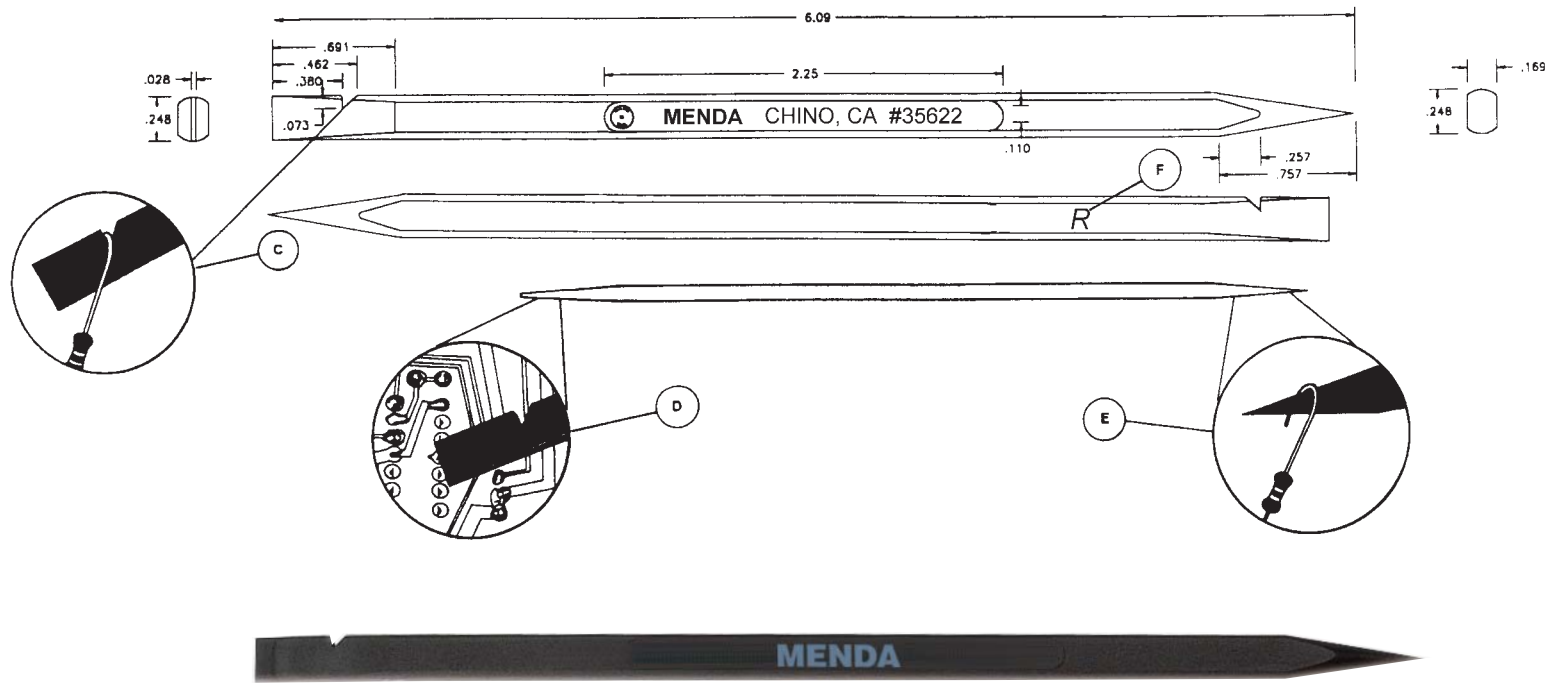

A. Material: 15% Glass Filled Supertough Nylon

B. The hygroscopic (readily accepts moisture) properties of Nylon will make this tool suitable for use around ESD sensitive components after a few minutes of handling the tool with bare hands. If used with gloves in a clean environment the tools must be dipped in a topical antistatic solution before use in sensitive areas. Topical treatment should be repeated at six month intervals. Without exposure to moisture or antistatic treatment, Nylon is in the insulative resistance range and charges will not be removed to ground.

C. Notch for hooking and pulling wires or components.

D. Flat "screwdriver" surface for spudging wire leads down flat on circuit boards.

E. Pointed end for forming wire leads or for use as pointer probe for holding objects for soldering.

F. Date Code (R=2006, S= 2007, T=2008, etc.)

Melting Point: 450°F (232°C)

Prober, Soldering Tool, Nylon

# MENDA

A

DRAWING NUMBER  
35622