

# Micro Commercial Components Corp.

**Complete Discrete Semiconductor Solutions** 

Part Number	MB258
product family	BRIDGE RECTIFIERS
package type	MB-35
VRM(PRV)	800V
lfsm	300A
IF(AV)	25A
@Vf	1.1V
@lf	12.5A
Trr	
IR	5.0μΑ
@VR	800V
Package Qty	Bulk: 50pcs/Box, 400Pcs/Ctn .
This product is listed und Diodes Bridge Rectifiers	er the following categories where you may find similar products:



**Micro Commercial Components** 

## MB2505 THRU MB2510

#### **Features**

- Mounting Hole For #10 Screw
- High Conductivity Metal Case
- Any Mounting Position
- Surge Rating Of 300 Amps
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant (NOTE 1)("P" Suffix designates RoHS Compliant. See ordering information)

### **Maximum Ratings**


- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- UL Recognized File # E165989

MCC	Device	Maximum	Maximum	Maximum
Catalog	Marking	Recurrent	RMS	DC
Number		Peak Reverse	Voltage	Blocking
		Voltage		Voltage
MB2505	MB2505	50V	35V	50V
MB251	MB251	100V	70V	100V
MB252	MB252	200V	140V	200V
MB254	MB254	400V	280V	400V
MB256	MB256	600V	420V	600V
MB258	MB258	800V	560V	800V
MB2510	MB2510	1000V	700V	1000V
Flectrical Ch	ectrical Characteristics @ 25°C Unless Otherwise Snecified			

Electrical Unaracteris	tics @ 25 t	; UNIESS U	therwise Specified
Average Forward	I <sub>F(AV)</sub>	25.0A	$T_{C} = 55^{\circ}C$
Current			
Peak Forward Surge	I <sub>FSM</sub>	300A	8.3ms, half sine
Current			
Maximum Forward			
Voltage Drop Per	VF	1.2V	I <sub>FM</sub> = 12.5A per
Element			element;
			T <sub>J</sub> = 25°C
Maximum DC			
Reverse Current At	I <sub>R</sub>	10µA	T <sub>J</sub> = 25°C
Rated DC Blocking		1mA	T_ = 125°C
Voltage			0

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7

### 25 Amp Single Phase Bridge Rectifier 50 to 1000 Volts

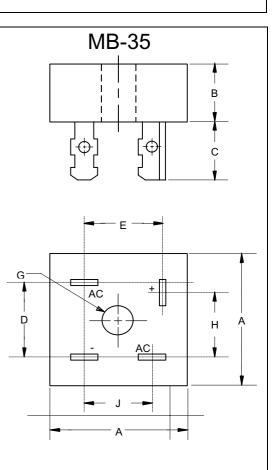

DIMENSIONS					
	INCHES		ММ		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	1.115	1.135	28.33	28.83	
В	.427	.447	10.85	11.35	
С	.428	.468	10.87	11.89	
D	.688	.730	17.48	18.50	
E	.618	.658	15.70	16.71	
G	.200		5.08		Ø
Н	.618	.658	15.70	16.71	
J	.530	.570	13.46	14.48	



#### **Ordering Information**

Device	Packing
(Part Number)-BP	Bulk;50pcs/Box

\*\*\*IMPORTANT NOTICE\*\*\*

Micro Commercial Components Corp . reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp . and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by Micro Commercial Components Corp. are not intended for use in Medical,

Aerospace or Military Applications.