


- Our lowest profile DIP socket with an above PCB height of only .095".
- Special short Hi-Rel, 4-finger BeCu #12 contact is rated at 3 amps. See page 218 for details.
- Series 115 use MM #1534 pins. See page 132 for details.
- Insulators are high temperature thermoplastic.

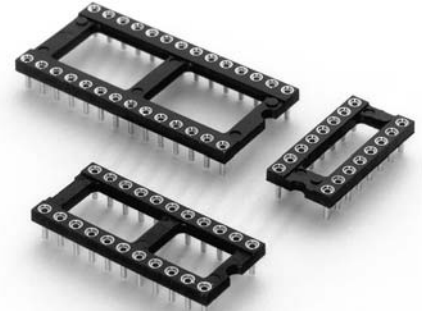

Total number of pins				Quantity per tube	<b>Ordering Information</b>	
	A	B	C			

Total number of pins	A	B	C	Quantity per tube
6	0.3	0.3	0.4	68
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
22	1.1	0.3	0.4	18
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
20	1.0	0.4	0.5	20
22	1.1	0.4	0.5	18
24	1.2	0.4	0.5	16
28	1.4	0.4	0.5	14
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
36	1.8	0.6	0.7	11
40	2.0	0.6	0.7	10
48	2.4	0.6	0.7	8
50	2.5	0.6	0.7	8

115-XX-306-41-003000	
115-XX-308-41-003000	
115-XX-314-41-003000	
115-XX-316-41-003000	
115-XX-318-41-003000	
115-XX-320-41-003000	
115-XX-322-41-003000	
115-XX-324-41-003000	
115-XX-328-41-003000	
115-XX-420-41-003000	
115-XX-422-41-003000	
115-XX-424-41-003000	
115-XX-428-41-003000	
115-XX-624-41-003000	
115-XX-628-41-003000	
115-XX-632-41-003000	
115-XX-636-41-003000	
115-XX-640-41-003000	
115-XX-648-41-003000	
115-XX-650-41-003000	

**RoHS**  
2002/95/EC

For RoHS compliance select ◇ plating code.

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

SPECIFY PLATING CODE XX=			<b>93</b>			<b>43◇</b>	<b>44◇</b>
Sleeve (Pin)			200μ" Sn/Pb			200μ" Sn	200μ" Sn
Contact (Clip)			30μ" Au			30μ" Au	200μ" Sn