

- Back**
- o PushPull Power
  - o Flat Cable Connectors SEK
  - o *har-mik®*
  - o D-Sub
  - o InduCom

---

- **Applications**

---

## Product details


---

**09 04 132 6921**

### Printed board connector

Type	Type D
Standard/Inverse	Standard
Contact gender	Male contacts
Size	Whole size
Number of contacts	32 poles
Contact arrangement	Rows a and c
Termination	Angled solder pins
Termination length	3.0 mm
First mating contact	without first mating contacts
Performance Class	Performance level 2 as per IEC 60603-2
Contacts	with contacts
Row pitch	5.08 mm
Board fixing	Without fixing
Coding facility	without coding facility
Current	6 A max.
Clearance/ Creepage	3,0 / 3,0 mm min
RoHS compliant	Yes

Alle Rechte vorbehalten/ All rights reserved

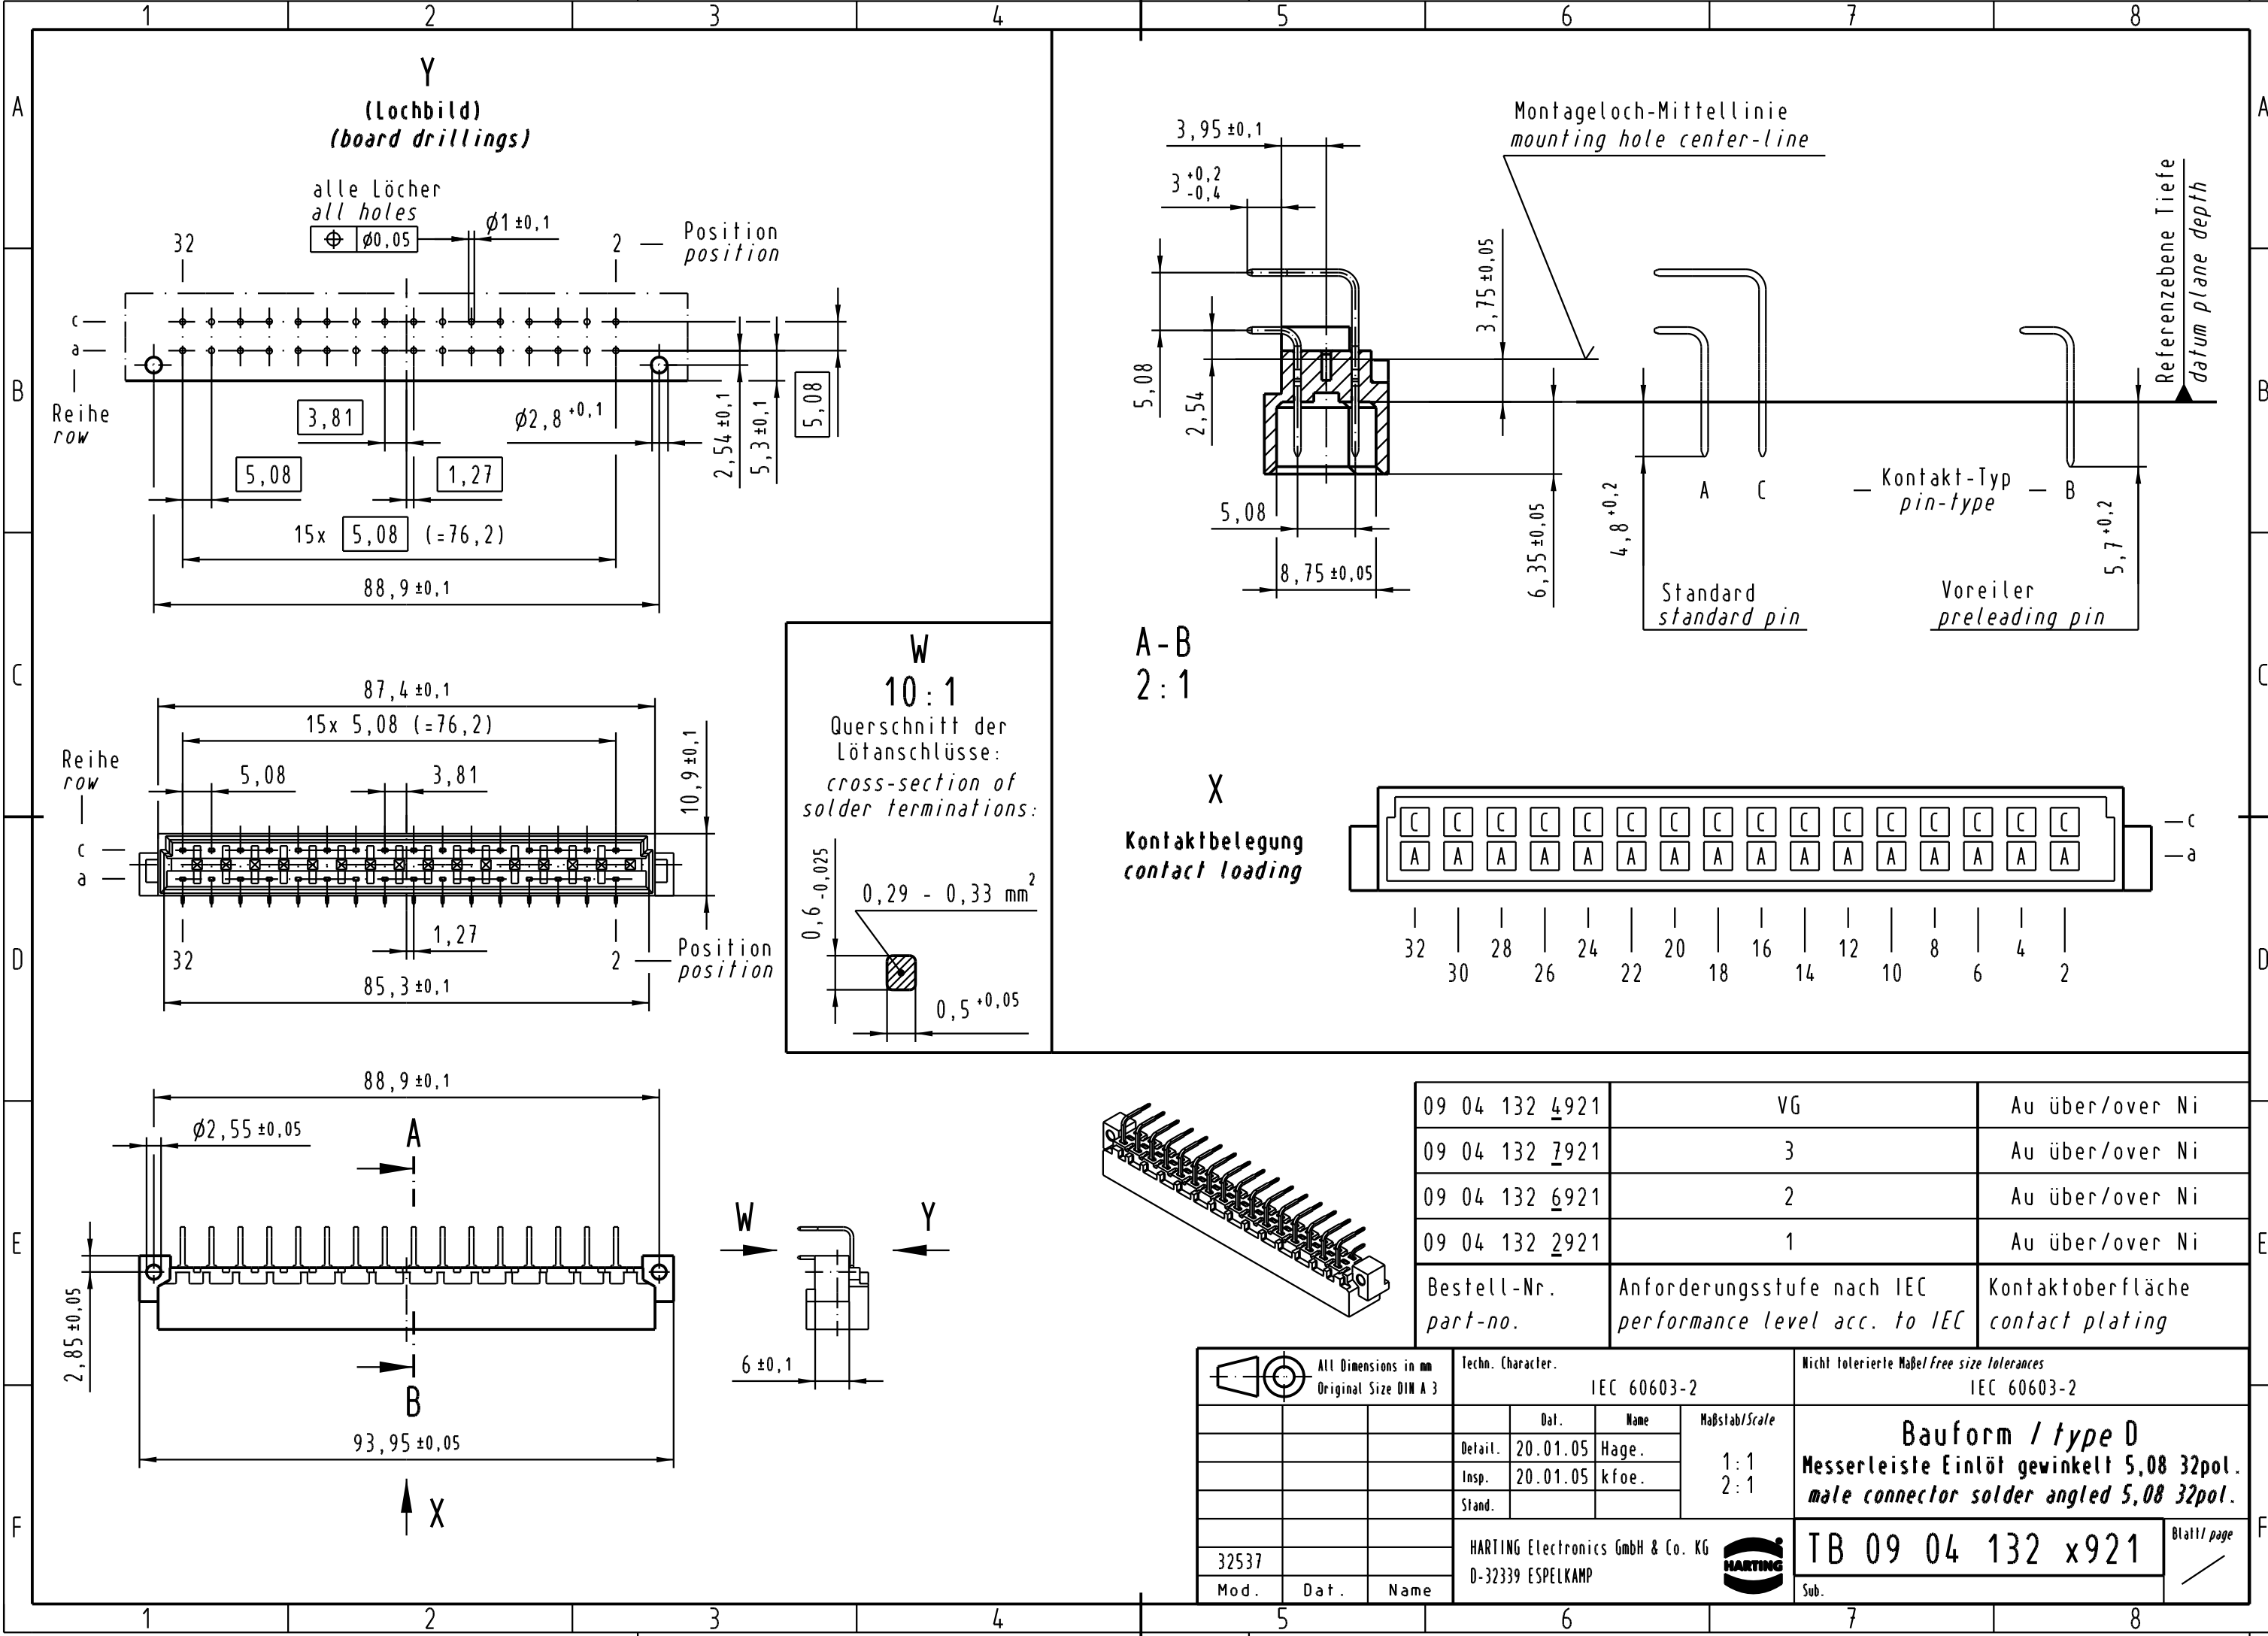

09 04 132 4921	VG	Au über/over Ni
09 04 132 7921	3	Au über/over Ni
09 04 132 6921	2	Au über/over Ni
09 04 132 2921	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

All Dimensions in mm Original Size DIN A 3		Techn. Character. IEC 60603-2		Nicht tolerierte Maß Free size tolerances IEC 60603-2	
		Dat.	Name	Maßstab/Scale	
		Detail.	20.01.05 Hage.	1:1	
		Insp.	20.01.05 kfoe.	2:1	
		Stand.			
32537		HARTING Electronics GmbH & Co. KG		<b>Bauform / type D</b> <b>Messerleiste Einlöt gewinkelt 5,08 32pol.</b> <b>male connector solder angled 5,08 32pol.</b>	
Mod.	Dat.	Name	D-32339 ESPELKAMP		
				<b>TB 09 04 132 x921</b> Blatt/page	
				Sub.	

