

Need Assistance?

- Contact Us
- Find a Distributor
- Order Samples
- Tech Library







Series image - Reference only

EU RoHS Compliant



Lead-free Process CapabilityWave Capable (TH only)

Search Parts in this Series 38720 Series

Mates With N/A

Part Number: 0387206214

Status: Active

Description:9.53mm (.375") Pitch Beau[™] PCB Terminal Strip, with Mounting Ends, 14 Circuits

Documents:

Drawing (PDF)

Related Catalog Page (PDF)

Order Products:

Check Distributor Inventory

Request Samples

Part Detail: (show all)

o General

)	Electrical								
)	Material Info								
)	Reference - Drawing Numbers								
	General								
	Product Family	Terminal Blocks							
	Series	<u>38720</u>							
	Application	Wire-to-Board							
	Component Type	One Piece							
	Product Name	Fixed Mount Barrier							
	Type	Barrier Strip							
	Physical								
	Circuits (Loaded)	14							
	Circuits (maximum)	14							
	Color - Resin	Black							
	Entry Angle	Horizontal							
	Lock to Mating Part	None							
	Material - Metal	Brass							
	Material - Resin	Polyester							
	Number of Rows	1							
	Orientation	N/A							
	PC Tail Length (in)	0.190 ln							
	PC Tail Length (mm)	4.80 mm							
	PCB Retention	Yes							
	Panel Mount	No							
	Pitch - Mating Interface (in)	0.375 ln							
	Pitch - Mating Interface (mm)	9.53 mm							
	Pitch - Term. Interface (in)	0.375 ln							
	Pitch - Term. Interface (mm)	9.52 mm							
	Polarized to Mating Part	No							
	Shrouded	Dual-Barrier							
	Stackable	No							
	Surface Mount Compatible (SMC)	No							
	Temperature Range - Operating	-40°C to +130°C							
	Wire Size AWG	14							
	Wire Size AWG	16							
	Wire Size AWG	18							
	Wire Size AWG	20							
	Wire Size AWG	22							
	Wire Size mm²	0.50 - 1.50							
	Electrical								
	Current - Maximum	15.000 Amp							
	Voltage - Maximum	300V							
	l								


o Physical


Material Info

Old Part Number	72514
Defenses Describes Noveless	
Reference - Drawing Numbers	

FeedbackPrivacyLegalSite MapHelp

Copyright 2005-2008

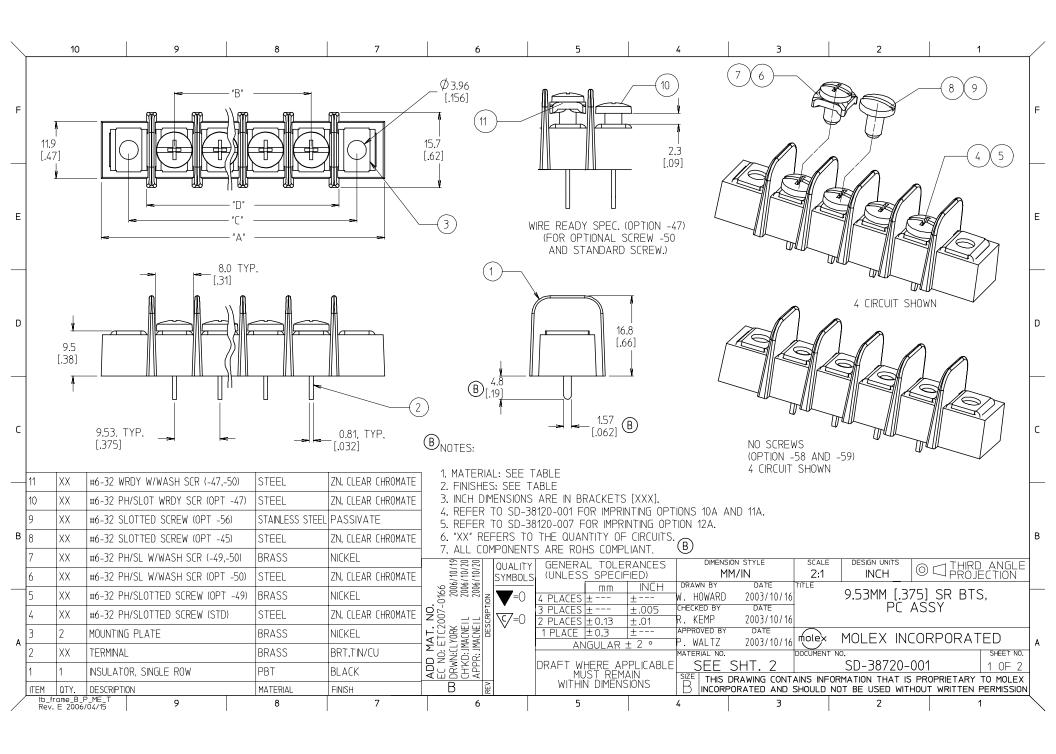

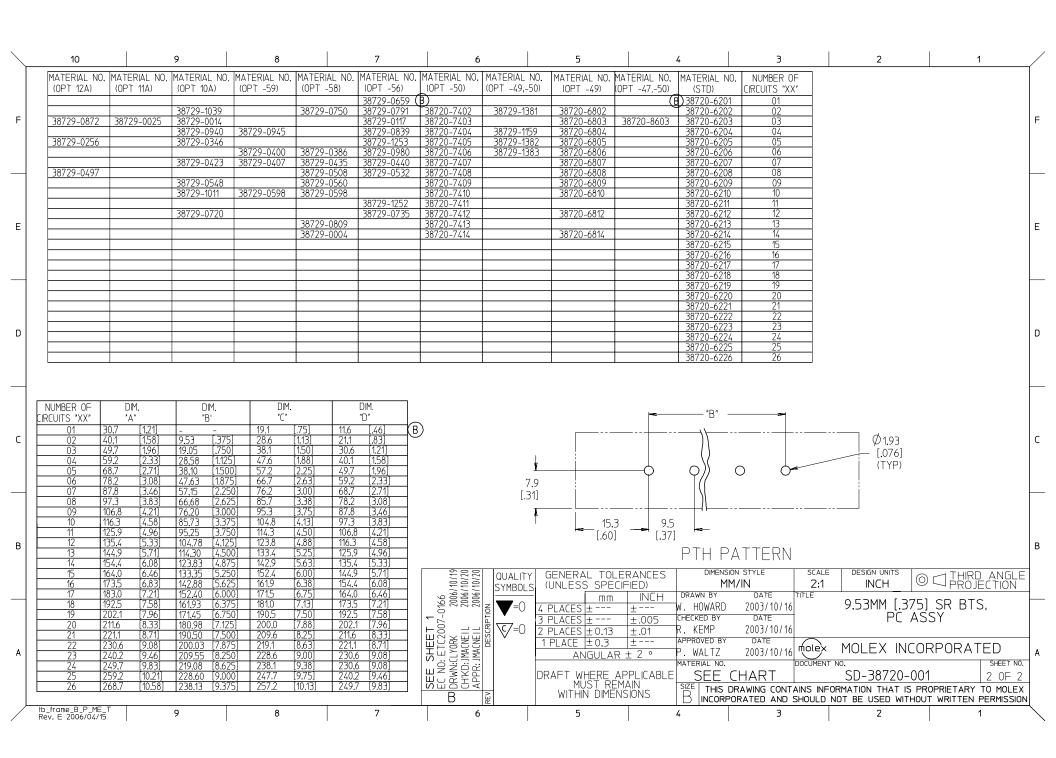

Beau® Barrier Strips

Beau terminal blocks provide a robust connection between wires and the PCB.

Beau terminal blocks are a great connector for their durability and versatility. Barrier strips can handle currents of up to 45.0A per circuit and all are rated for 300 or 600V. With the variety of terminal styles, screws and other options available on barrier strips, these parts can be customized in many ways.

Special additions to barrier strips such as topside hardware, marker strips and hinged covers ensure that you get the best possible connector designed specifically for your application.

Features

- Optional topside hardware allows for further customization to fit your design requirements
- Robust and durable screw terminals are ultrasonically welded into the thermoplastic insulator, reducing the risk for terminal twisting and solder joint failure
- Tri-barrier construction of some barrier strips provides a back wall to prevent over insertion and shorting
- No special tools required to terminate wires, only a No. 2 screwdriver required
- Broad range of screw and terminal options improves interconnect performance
- Various imprinting styles aid in labeling circuits for wiring, testing and repair in the field
- UL recognized and CSA approved
- RoHS and ELV compliant

Barrier Terminal Strips



Features and Benefits

- Robust and durable welded construction
- Wide variety of screw and terminal options
- Molded to exact length, no unsightly saw cuts

Reference Information

UL File No.: E48521 UL Guide No.: XCFR2 CSA File No.: 025562

Screw Only	Insulated Solder	Insulated PC	Centerline PC	Solder Turret	Centerline Wire Wrap	Centerline Right Angle PC	Insulated Fast On	Offset PC	Offset Wire Wrap	Offset Right Angle PC
	T						0			
All	38710 38720 38730	38710 38720 38730	38630 38710 38720 38730 38740	38630/38631 38710/38711 38720/38721 38730/38731	38631 38711 38721 38731	38711 38721 38731 38741	38711 38721 38731 38741	38700 38610	38701	38701

Circuits	Series	Pitch	Current	Voltage	Wire Range AWG	Lead-free
2-16	38630/38631	11.12 (.438)	25.0A	600V	12-24	Yes
2-30	38700/38701	8.25 (.325)	20.0A		12-22	
2-26	38710/38711	9.52 (.375)	25.0A	300V	12-24	
	38720/38721					
2-30	38730/38731/38732	11 10 (400)	30.0A		10-24	
	38740/38741/38742	11.12 (.438)				
2-32	38610	6.35 (.250)	10.0A	300V	18-22]

