


NA3FJ



3 pole XLR female - Stereo 1/4" locking jack (Tip, Ring, Sleeve contact)

Features & Benefits

- Versatile, pre-wired and ready to use adapters to reliably interlock various connector systems
- Professional look and compact space saving design, based on the XX Series
- Rugged diecast shell for best reliability

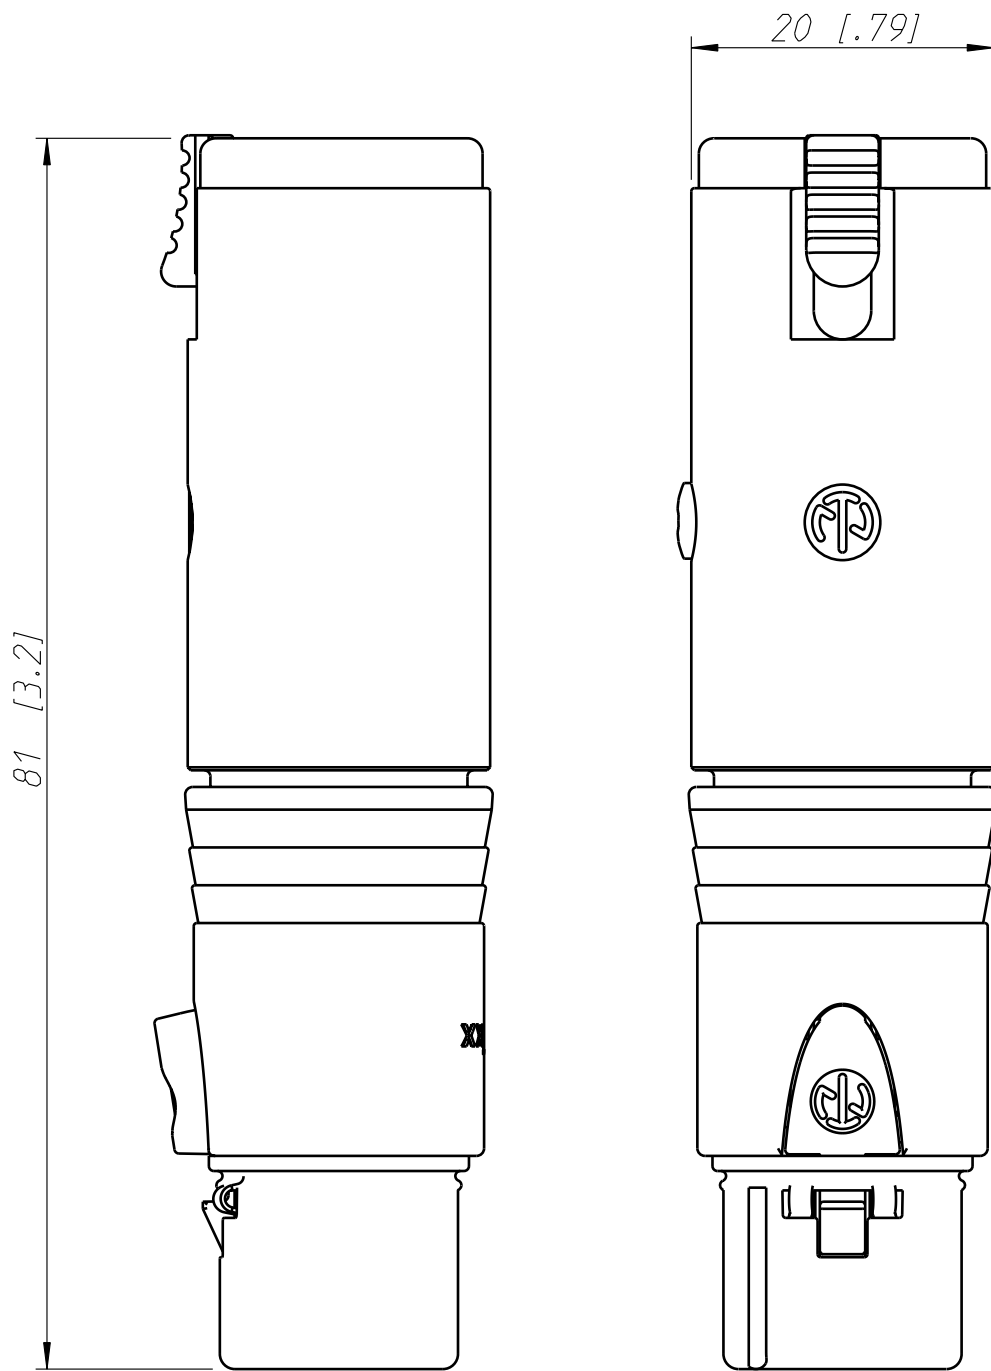

Allgemeintoleranzen ISO 2768-m	Werkstoff KEIN_MAT	Massstab: 2:1 (A4)		Datum	Name
			Gezeichnet	15.05.98	Alinjak
Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)	-		Freigegeben	-	-
			Geaendert	28.03.07	Koch
Benennung NA3FJ NA3FJ	Aend.-Nr.		Aend.-Index		
	-		A		
Ersatz fuer:		Blatt 1 von 1 Bl.			
NEUTRIK AG FL-9494 SCHAAN		Zeichn. Nr. ST-NA3FJ			



Audio

Circular Adapters

NA3FJ

There are no technical infos for this product.

Product

Connector Type	Adapter
----------------	---------

Electrical

Contact resistance	$\leq 3 \text{ m}\Omega$ (XLR)
--------------------	--------------------------------

Dielectric strength	1.5 kV dc / $> 1 \text{ kVdc}$ (XLR/Jack)
---------------------	---

Insulation resistance	$> 2 \text{ G}\Omega$
-----------------------	-----------------------

Mechanical

Locking device	Latch lock
----------------	------------

Material

Contact plating	2 μm Ag
-----------------	--------------------

Contacts	Bronze (CuSn6) (XLR female)
----------	-----------------------------

Contacts	Bronze (CuBe2) (jack)
----------	-----------------------

Insert	Polyamide (PA 6.6 30 % GR)
--------	----------------------------

Shell	Zinc diecast (ZnAl4Cu1)
-------	-------------------------

Shell plating	gal Cu/Ni
---------------	-----------

Environmental

Temperature range	-20 °C to +65 °C
-------------------	------------------

Optical

Mobile Cables