



Circular Adapters



NA3MP

3 pole XLR male - stereo 1/4" plug (Tip, Ring, Sleeve contact)


Features & Benefits

- Versatile, pre-wired and ready to use adapters to reliably interlock various connector systems
- Professional look and compact space saving design, based on the X Series (XLR worldwide accepted standard)
- Rugged diecast shell for best reliability



Circular Adapters

NA3MP

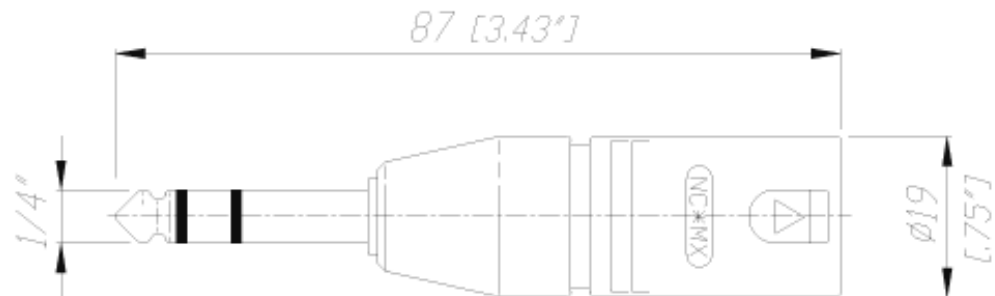

There are no technical infos for this product.

Product

Connector Type Adapter

Electrical

Contact resistance $\leq 3 \text{ m}\Omega$ (XLR)

Dielectric strength 1.5 kV dc / > 1 kVdc (XLR/Plug)

Insulation resistance > 2 G Ω

Mechanical

Locking device Latch lock

Material

Contact plating 2 μm Ag/2 μm Ni

Contacts Brass (CuZn39Pb3) (XLR)

Contacts Brass (CuZn39Pb3) (plug)

Insert Polyamide (PA 6.6 30 % GR)

Shell Zinc diecast (ZnAl4Cu1)

Shell plating gal Cu/Ni

Environmental

Temperature range -20 °C to +65 °C

Optical

Mobile Cables