



Deutsche Version

Home

About Us

Products

Support

News

Sitemap

Search

Products only

© Neutrik® AG All rights reserved Legal Notices




Print

NYS203



1/4" plug, 2-pole, plastic handle with flexible strain relief

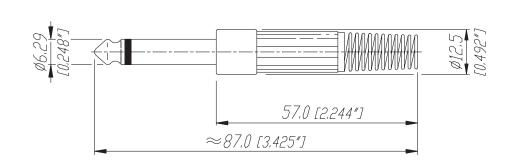

					Werkstoffi	Massstabi		Datum	Name
				*)Lieferant darf ohne Ruecksprache nicht geaendert werden		1:1	Gezeichnet	29.01.01	Battlogg
							Geprueft		
				Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)			Gesehen		
				Benennung: 1/4" Phone Plugs			Ersetzt durch:		Blatt
				NYS 203		Ersatz fuer:		von Blatt	
							Zeichn, Nr.		
Ind.	Aenderung	Datum	Name	Zeichn. Nr. 3102 ST 22 16			22 16		





NYS 1/4" Plugs

NYS203

There are no technical infos for this product.

Product								
Electrical								
Contact resistance	$<$ 10 m Ω							
Dielectric strength	0,5 kVdc							
Rated current per contact	depends on mated connector A							
Mechanical								
Cable O.D.	≤ 6 mm							
Wire size	24 AWG							
Material								
Bushing	steel sp.							
Contact plating	2 μm Ni							
Contacts	CuZn39Pb3							
Insert	PA 66 30 % GR+insulation board							
Shell	ABS							
Environmental								
Solderability	Complies with IEC 68-2-20							
Temperature range	-20 °C to +70 °C							
Optical								
Mobile Cables								