

## 1/4" Prof. Phone Plugs, C-Series

Audio back

Print

### NP2C-BAG



2 pole 1/4" professional phone plug, black metal housing, Nickel contacts

Professional phone plug with robust metal shell and chuck type strain relief.

#### Features & Benefits


- Rugged diecast metal shell
- Chuck type strain relief for optimum cable protection
- Precision machined one-piece contacts - avoid hook up of tip contact
- Meets all prevailing standards

#### ACCESSORIES



# NP2C

Ø6.29 [0.248"]

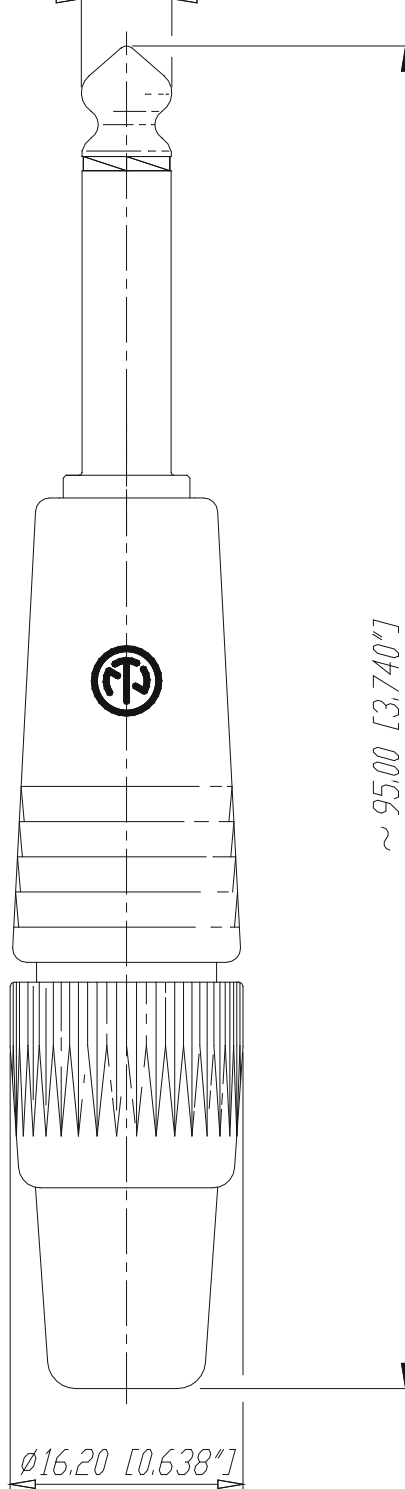

~ 95.00 [3.740"]

Ø16.20 [0.638"]


				*)Lieferant darf ohne Ruecksprache nicht geaendert werden  Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)	Werkstoff:	Massstab:  <i>2:1</i>	Gezeichnet	Datum	Name	
				Benennung: <i>1/4" Phone Plugs NP2C</i>			Ersetzt durch:	Blatt		
							Ersatz fuer:	von Blatt		
				<b>NEUTRIK AG FL-9494 SCHAAN</b>			Zeichn. Nr.	<i>3102 St 06 01</i>		
Ind.	Aenderung	Datum	Name							



## 1/4" Prof. Phone Plugs, C-Series



### NP2C-BAG

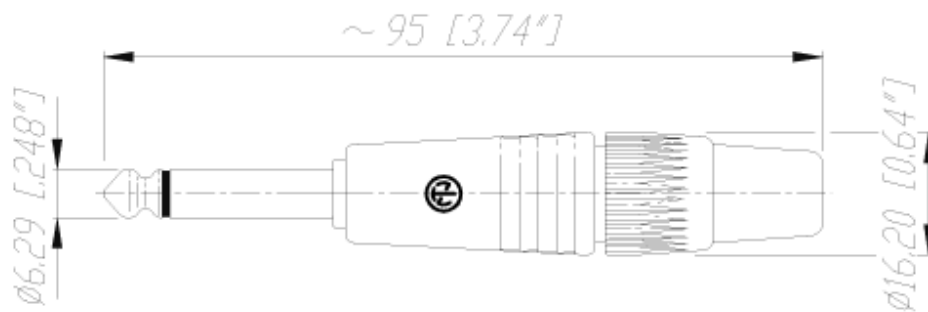

There are no technical infos for this product.

#### Product

Connector Type	Plug
Gender	male

#### Electrical

Contact resistance	depends on mating connector mΩ
Dielectric strength	1 kVdc
Insulation resistance	> 2 GΩ (initial)
Insulation resistance	≥ 1 GΩ (after damp heat test)
Rated current per contact	≤ 15 A

#### Mechanical

Cable O.D.	4 - 7 mm
Wire size	1 mm <sup>2</sup>
Wire size	18 AWG
Wiring	Solder contacts

#### Material

Bushing	Polyacetal (POM) + PU
Contact plating	2 μm Ni (Su)
Contacts	Brass (CuZn39Pb3)
Insert	Polyamide (PA 6.6 30 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Black chromium
Strain relief	Polyacetal (POM)

#### Environmental

Standard compliance	IEC 60603-11 / EIA RS-453
Solderability	Complies with IEC 68-2-20
Temperature range	-20 °C to +65 °C

Optical

Mobile Cables