



 Deutsche
Version

[Home](#)
[About Us](#)
[Products](#)
[Support](#)
[News](#)
[Sitemap](#)

[Search](#)

[Products only](#)

© Neutrik® AG
All rights reserved
[Legal Notices](#)



1/4" Prof. Phone Plugs, C-Series

Audio

[back](#)

[Print](#)

NP3C-BAG



3 pole 1/4" professional phone plug, black metal housing, Nickel contacts

Professional phone plug with robust metal shell and chuck type strain relief.


Features & Benefits

- Rugged diecast metal shell
- Chuck type strain relief for optimum cable protection
- Precision machined one-piece contacts - avoid hook up of tip contact
- Meets all prevailing standards


ACCESSORIES



NP3C

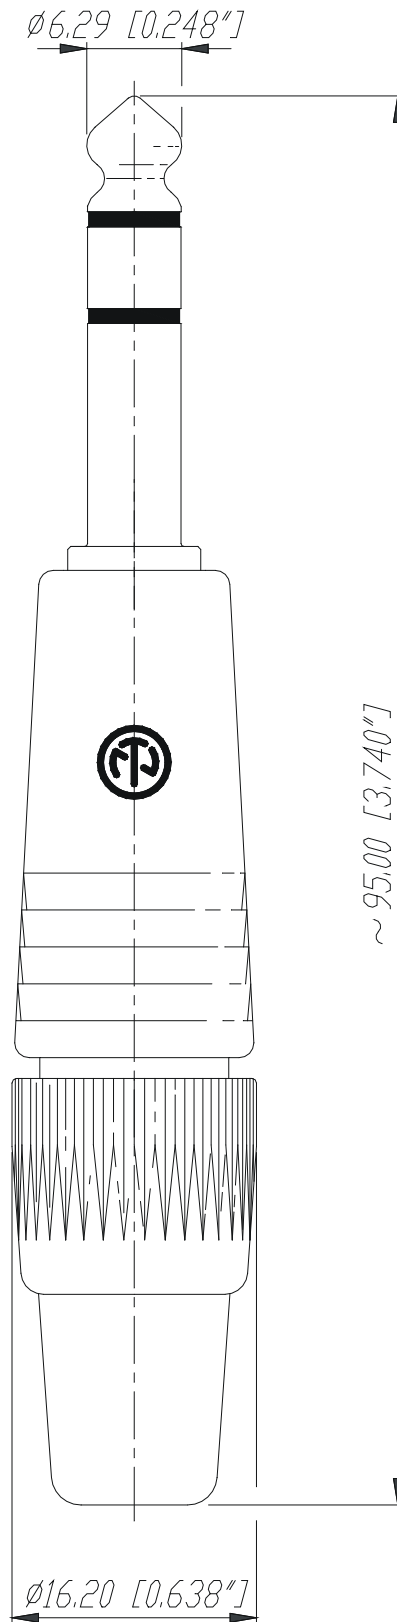


				Werkstoff:	Massstab:		Datum	Name
				*)Lieferant darf ohne Ruecksprache nicht geaendert werden	2:1	Gezeichnet	10.08.98	Alinjak
						Geprueft		
				Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)		Gesehen		
				Benennung: 1/4" Phone Plugs NP3C		Ersetzt durch:		Blatt
						Ersatz fuer:		von Blatt
				NEUTRIK AG FL-9494 SCHAAN		Zechn. Nr.		3102 St 06 02
Ind.	Aenderung	Datum	Name					

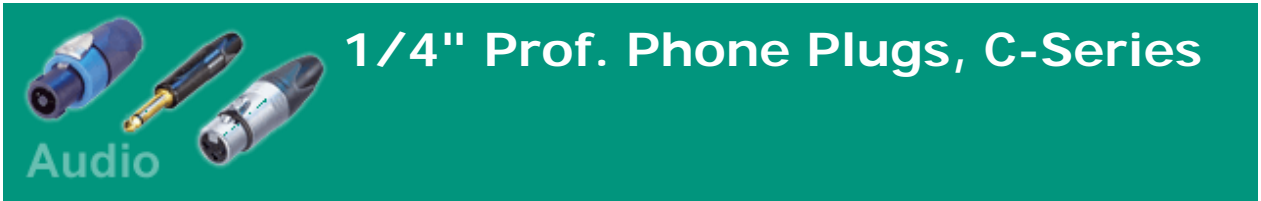

1/4" Prof. Phone Plugs, C-Series

NP3C-BAG

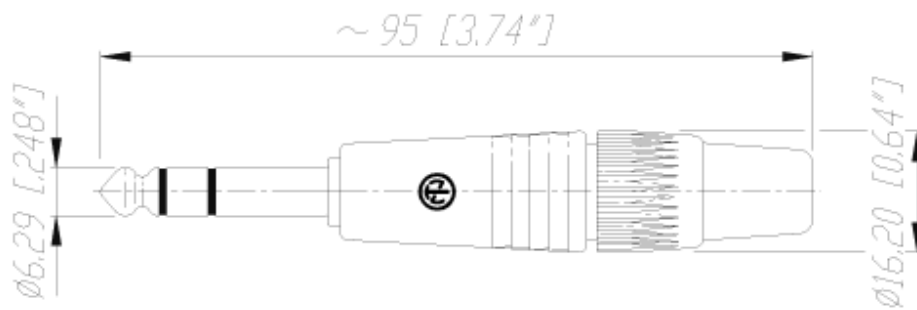

There are no technical infos for this product.

Product	
Connector Type	Plug
Gender	male
Electrical	
Contact resistance	depends on mating connector mΩ
Dielectric strength	1 kVdc
Insulation resistance	> 2 GΩ (initial)
Insulation resistance	≥ 1 GΩ (after damp heat test)
Rated current per contact	≤ 15 A
Mechanical	
Cable O.D.	4 - 7 mm
Wire size	1 mm ²
Wire size	18 AWG
Wiring	Solder contacts
Material	
Bushing	Polyacetal (POM) + PU
Contact plating	2 μm Ni (Su)
Contacts	Brass (CuZn39Pb3)
Insert	Polyamide (PA 6.6 30 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Black chromium
Strain relief	Polyacetal (POM)
Environmental	
Standard compliance	IEC 60603-11 / EIA RS-453
Solderability	Complies with IEC 68-2-20
Temperature range	-20 °C to +65 °C

Optical

Mobile Cables