



 Deutsche
Version

- [Home](#)
- [About Us](#)
- [Products](#)
- [Support](#)
- [News](#)
- [Sitemap](#)

Search

[Products only](#)

© Neutrik® AG
All rights reserved
[Legal Notices](#)



Audio

NYS Jacks


[back](#)

[Print](#)


NYS2202



Jack for thick panels, 2-pole, long-threaded bushing with washer and nut, full metal

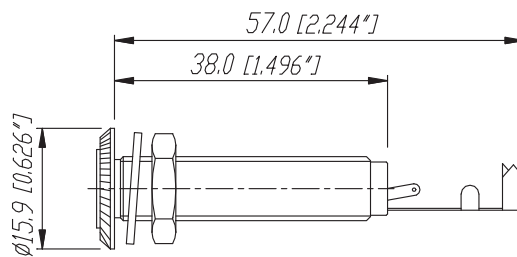

Frontplattenausschnitt
Panel cut out



					Werkstoff:	Maßstab:		Datum	Name
				*Lieferant darf ohne Ruecksprache nicht geaendert werden		1:1	Gezeichnet	04.04.02	Battlogg
				Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)			Geprueft		
				Benennung: 1/4" Mono Phone Jacks			Gesehen		
				NYS 2202			Ersetzt durch:		Blatt
							Ersatz fuer:		von Blatt
							Zeichn. Nr.		
Ind.	Aenderung	Datum	Name						3102 ST 22 67

REAN



NYS Jacks



NYS2202

There are no technical infos for this product.

Product	
Electrical	
Contact resistance	< 10 mΩ
Dielectric strength	0,5 kVdc
Rated current per contact	1 A
Mechanical	
Cable O.D.	≤ 6 mm
Insertion force	≤ 20 N
Withdrawal force	> 10 N
Lifetime	5000 mating cycles
Panel thickness	30 mm
Wire size	24 AWG
Material	
Contact plating	SnCe
Contacts	CuSn6
Insert	PA 6+insulation board
Shell	CuZn39Pb3 gal 2 ?m Ni plated
Environmental	
Solderability	Complies with IEC 68-2-20
Temperature range	-20 °C to +70 °C
Optical	
Mobile Cables	