
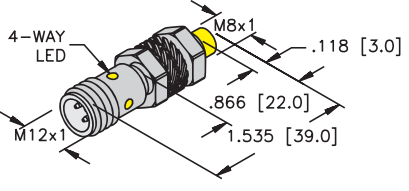
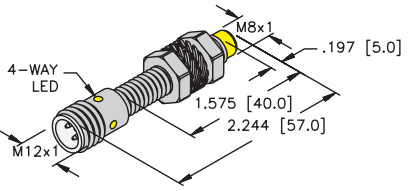
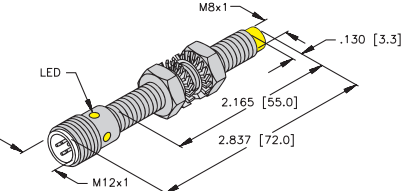







# Inductive Sensors



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
<b>8 mm - Nonembeddable, Miniature Threaded, eurofast® Quick Disconnect</b> 	Ni 4-EG08K-AG41X-H1341	S4561011	Short Barrel	4	2-Wire DC
	Ni 4-EG08K-AG41X-H1341/S1589	S4561090	weldguard	4	
	Ni 3-EG08K-AN6X-H1341	S4669760	Short Barrel	3	3-Wire DC NPN
	Ni 3-EG08K-AP6X-H1341	S4669660	Short Barrel	3	3-Wire DC PNP
	Ni 3-EG08K-Y1-H1341	S1003720	Short Barrel	3	2-Wire DC NAMUR
Ni 3-EG08K-Y1X-H1341	S1003704		3		
<b>8 mm - Nonembeddable, Miniature Threaded, eurofast Quick Disconnect</b> 	Ni 4-EG08-AG41X-H1341	S4561001		4	2-Wire DC
	Ni 4-EG08-AG41X-H1341/S1589	S4561091	weldguard	4	
	Ni 3-EG08-AN6X-H1341	S4602860		3	3-Wire DC NPN
	Ni 3-EG08-AN6X-H1341/S1589	S4602889	weldguard	3	
	Ni 4U-EG08-AN6X-H1341	S4600650	Uprox	4	
	Ni 3-EG08-AN7X-H1341	S4669761	TTL Compatible	3	
	Ni 3-EG08-AP6X-H1341	S4602760		3	3-Wire DC PNP
	Ni 3-EG08-AP6X-H1341/S1589	S4602799	weldguard	3	
	Ni 4U-EG08-AP6X-H1341	S4600640	Uprox	4	
	Ni 4U-EG08-AP6X-H1341/S1589	S4600640-1	Uprox/weldguard	4	
Ni 3-EG08-Y1-H1341	S1003730		3	2-Wire DC NAMUR	
<b>8 mm - Nonembeddable, Miniature Threaded, eurofast Quick Disconnect</b> 	Ni 2-G08-AN6X-H1341	S4603300		2	3-Wire DC NPN
	Ni 3-G08-AN6X-H1341	S4602704		3	
	Ni 2-G08-AP6X-H1341	S4603200		2	3-Wire DC PNP
	Ni 3-G08-AP6X-H1341	S4602705		3	

Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	Power LED	Output LED	Mating Cordset	Wiring Diagram #	Wiring Diagrams
10-65 VDC	1000	≤100	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	1	<b>Diagram 1</b> 
	1000	≤100	-25 to +70	IP 67	SS	WG	N/A		RK 4T-*	1	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	2	<b>Diagram 2</b> 
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	3	
5-30 VDC	5000	Remote	-25 to +70	IP 67	SS	PA 12	N/A	N/A	RK 4.21T-*	4	<b>Diagram 3</b> 
	5000	Remote	-25 to +70	IP 67	SS	PA 12	N/A	N/A	RK 4.21T-*	4	
10-65 VDC	1000	≤100	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	1	<b>Diagram 3</b> 
	1000	≤100	-25 to +70	IP 67	SS	WG	N/A	YE	RK 4T-*	1	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	2	<b>Diagram 4</b> 
	3000	≤150	-25 to +70	IP 67	SS	WG	N/A	YE	RK 4T-*	2	
	2000	≤150	-30 to +85	IP 68	SS	PA 12	N/A	YE	RK 4T-*	2	
	2000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	2	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	3	<b>Diagram 4</b> 
	3000	≤150	-25 to +70	IP 67	SS	WG	N/A	YE	RK 4T-*	3	
	2000	≤150	-30 to +85	IP 68	SS	PA 12	N/A	YE	RK 4T-*	3	
	2000	≤150	-30 to +85	IP 67	SS	WG	N/A	YE	RK 4T-*	3	
5-30 VDC	5000	Remote	-25 to +70	IP 67	SS	PA 12	N/A	N/A	RK 4.21T-*	4	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	2	
	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	2	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	3	
	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	RK 4T-*	3	

\* Length in meters.

### 3-Wire DC

Ripple. . . . .	≤10%
Differential Travel (Hysteresis). . . . .	3-15% (5% typical)
Voltage Drop Across Conducting Sensor. . . . .	≤1.8 V
	- Si...K08/K10(AP71, AN7) . ≤0.7 V
	- Bi/Ni../S34 . . . . . ≤1.8 V
	- Bi 2-Q8SE-AP/AN.. . . . ≤2.5 V
Trigger Current for Overload Protection . . . . .	≥220 mA on 200 mA Load Current
	≥170 mA on 150 mA Load Current
	≥120 mA on 100 mA Load Current
Off-State (Leakage) Current . . . . .	<100 µA
No-Load Current . . . . .	<10 mA ( <b>Uprox</b> ≤15 mA)
Time Delay Before Availability . . . . .	≤8 ms
Power-On Effect . . . . .	Per IEC 947-5-2
Reverse Polarity Protection . . . . .	Incorporated
Wire-Break Protection . . . . .	Incorporated
Transient Protection. . . . .	Per EN 60947-5-2
Shock. . . . .	30 g, 11 ms
Vibration . . . . .	55 Hz, 1 mm Amplitude in all 3 Planes
Repeatability . . . . .	≤2% of Rated Operating Distance
	Bi 2-Q8SE-AP/AN.. ≤5% of Rated Operating Distance

### 4-Wire DC

Ripple. . . . .	≤10%
Differential Travel (Hysteresis). . . . .	3-15% (5% typical)
Voltage Drop Across Conducting Sensor. . . . .	≤1.8 V at 200 mA
Trigger Current for Overload Protection . . . . .	≥220 mA on 200 mA Load Current
	≥170 mA on 150 mA Load Current
	≥120 mA on 100 mA Load Current
Off-State (Leakage) Current . . . . .	<100 µA
No-Load Current . . . . .	<10 mA (Uprox ≤15 mA)
Power-On Effect . . . . .	Per IEC 947-5-2
Reverse Polarity Protection . . . . .	Incorporated
Wire-Break Protection . . . . .	Incorporated
Transient Protection. . . . .	Per EN 60947-5-2
Shock. . . . .	30 g, 11 ms
Vibration . . . . .	55 Hz, 1 mm Amplitude in all 3 Planes
Repeatability . . . . .	≤2% of Rated Operating Distance