

DZ



DPDT Special Purpose Switch

- Incorporates two independent built-in Switches
- Cost effectively control two circuits with one switch
- Ideal for switching two circuits operating on two different voltages
- Interchangeable with the Omron Z switch as both have the same mounting hole dimensions, mounting pitch, and pin plunger position

Part	Rated Resistive Load - Switch	Actuator types	Contact form	Operating Force	Seal type	Termination Style	Service Life - Electrical (Min. @ Rated Loads)
DZ-10GV-1A	10A @ 250VAC	Hinge lever	DPDT	200g	Unsealed	Solder	500,000 ops
DZ-10GV-1B	10A @ 250VAC	Hinge lever	DPDT	200g	Unsealed	Screw Terminals	500,000 ops
DZ-10GV2-1A	10A @ 250VAC	Hinge roller lever	DPDT	270g	Unsealed	Solder	500,000 ops
DZ-10GV2-1B	10A @ 250VAC	Hinge roller lever	DPDT	270g	Unsealed	Screw Terminals	500,000 ops
DZ-10GV22-1A	10A @ 250VAC	Short hinge roller lever	DPDT	430g	Unsealed	Solder	500,000 ops
DZ-10GV22-1B	10A @ 250VAC	Short hinge roller lever	DPDT	430g	Unsealed	Screw Terminals	500,000 ops
DZ-10GW-1B	10A @ 250VAC	Hinge lever	DPDT	170g	Unsealed	Screw Terminals	500,000 ops
DZ-10GW2-1A	10A @ 250VAC	Hinge roller lever	DPDT	213g	Unsealed	Solder	500,000 ops
DZ-10GW2-1B	10A @ 250VAC	Hinge roller lever	DPDT	213g	Unsealed	Screw Terminals	500,000 ops
DZ-10GW22-1A	10A @ 250VAC	Short hinge roller lever	DPDT	400g	Unsealed	Solder	500,000 ops

Special-purpose Basic Switch DZ

DPDT Basic Switch for Two Independent Circuit Control

- Incorporates two completely independent built-in switches.
- Ideal for switching the circuits operating on two different voltages, and for controlling two independent circuits.
- Interchangeable with OMRON Z Basic Switches, as both switches are identical in mounting hole dimensions, mounting pitch and pin plunger position.



Ordering Information

Model Number Legend

DZ-10 G □ - 1 □
1 2 3 4 5

1. Ratings

10: 10 A (250 VAC)

2. Contact Gap

G: 0.5 mm

3. Actuator

None: Pin plunger

V: Hinge lever

V22: Short hinge roller lever

V2: Hinge roller lever

W: Hinge lever

W22: Short hinge roller lever

W2: Hinge roller lever

4. Contact Form





1: DPDT

5. Terminals

A: Solder terminal

B: Screw terminal

List of Models

Actuator	OT	Solder terminal	Screw terminal
Pin plunger 	0.13 mm min.	DZ-10G-1A	DZ-10G-1B
Hinge lever 	1.6 mm min.	DZ-10GW-1A	DZ-10GW-1B
	0.4 mm min.	DZ-10GV-1A	DZ-10GV-1B
Short hinge roller lever 	0.9 mm min.	DZ-10GW22-1A	DZ-10GW22-1B
	0.13 mm min.	DZ-10GV22-1A	DZ-10GV22-1B
Hinge roller lever 	1.2 mm min.	DZ-10GW2-1A	DZ-10GW2-1B
	0.26 mm min.	DZ-10GV2-1A	DZ-10GV2-1B

Specifications

■ Ratings

Rated voltage	Non-inductive load				Inductive load				Inrush current	
	Resistive load		Lamp load		Inductive load		Motor load			
	NC	NO	NC	NO	NC	NO	NC	NO	NC	NO
125 VAC	10 A		2 A	1 A	6 A		3 A	1.5 A	30 A max.	15 A max.
250 VAC	10 A		1.5 A	0.7 A	4 A		2 A	1 A		
8 VDC	10 A		3 A	1.5 A	6 A		5 A	2.5 A		
14 VDC	10 A		3 A	1.5 A	6 A		5 A	2.5 A		
30 VDC	10 A		3 A	1.5 A	4 A		3 A	1.5 A		
125 VAC	0.5 A		0.5 A		0.05 A		0.05 A			
250 VDC	0.25 A		0.25 A		0.03 A		0.03 A			

- Note:** 1. Inductive load has a power factor of 0.4 min. (AC) and a time constant of 7 ms max. (DC).
 2. Lamp load has an inrush current of 10 times the steady-state current.
 3. Motor load has an inrush current of 6 times the steady-state current.

■ Characteristics

Operating speed	0.1 mm to 1 m/s (at pin plunger)
Operating frequency	Mechanical: 240 operations/min Electrical: 20 operations/min
Insulation resistance	100 MΩ min. (at 500 VDC)
Contact resistance	15 mΩ max. (initial value)
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between non-continuous terminals 1,500 VAC, 50/60 Hz for 1 min between current-carrying metal parts and non-current-carrying metal part, and between current-carrying metal part and ground and between switches
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² {approx. 100G} max. Malfunction: 300 m/s ² {approx. 30G} max. (see notes 1 and 2.)
Life expectancy	Mechanical: 1,000,000 operations min. Electrical: 50,000 operations min.
Ambient temperature	Operating: -25°C to 80°C (with no icing)
Ambient humidity	Operating: 35% to 85% max.
Weight	Approx. 30 to 50 g


- Note:** 1. The values are for pin plunger models. (Contact your OMRON representative for other models.)
 2. Malfunction: 1 ms max.

■ Approved Standards

UL508 (File No. E41515)/CSA C22.2 No. 55 (File No. LR21642)


DZ-10G: 10 A, 125 VAC
 10 A, 250 VAC
 2 A, 480 VAC
 1/2 A, 125 VDC
 1/4 A, 250 VDC
 1/8 HP 125 VAC
 1/4 HP 250 VAC

■ Contact Form




Engineering Data

Mechanical Life Expectancy (Pin plunger)

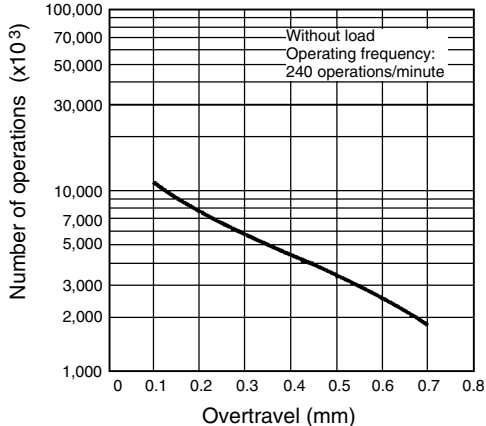


Electrical Life Expectancy (Pin plunger)

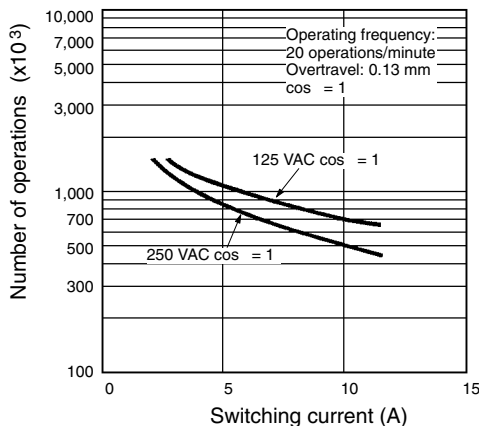


Dimensions

■ Terminals

Solder Terminals (-1A)

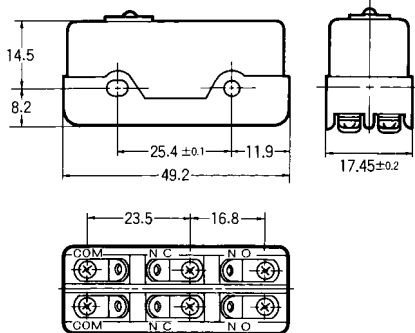


Screw Terminals (-1B)

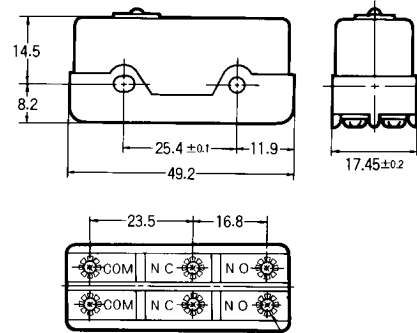

Six M3 pan head screws (with toothed washer)

■ Mounting Holes




■ Dimensions and Operating Characteristics

- Note:** 1. All units are in millimeters unless otherwise indicated.
 2. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.
 3. The solder terminal model has a suffix "-1A" in its model number and its omitted dimensions are the same as the corresponding dimensions of the pin plunger model.

Pin Plunger


DZ-10G-1B

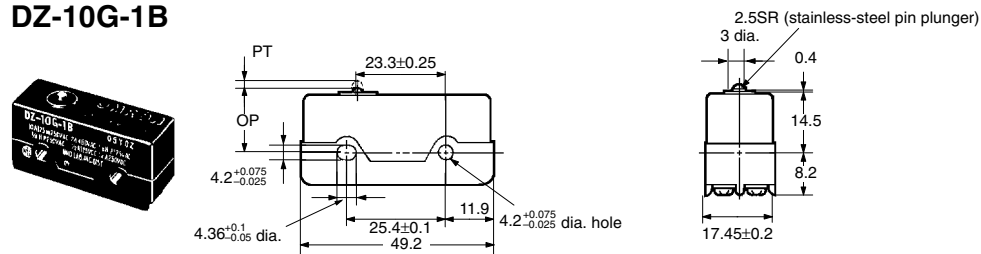

OF max.	5.95 N {570 gf}
RF min.	0.55 N {57 gf}
PT max.	1.7 mm
OT min.	0.13 mm
MD max.	0.4 mm
OP	15.6±0.4 mm


Hinge Lever

DZ-10GW-1B

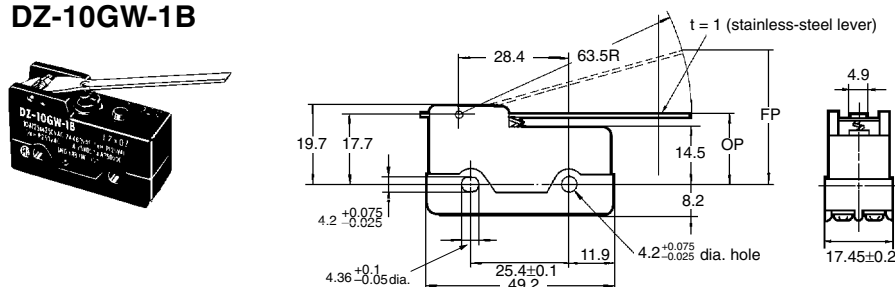

OF max.	1.67 N {170 gf}
RF min.	0.27 N {28 gf}
OT min.	1.6 mm
MD max.	0.4 mm
FP max.	46.3 mm
OP	21.8±1 mm


DZ-10GV-1B

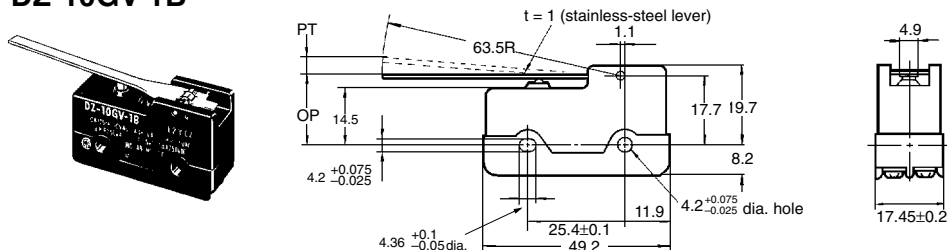

OF max.	1.96 N {200 gf}
RF min.	0.13 N {14 gf}
PT max.	6 mm
OT min.	0.4 mm
MD max.	1.7 mm
OP	18.36±1 mm


Short Hinge Roller Lever

DZ-10GW22-1B

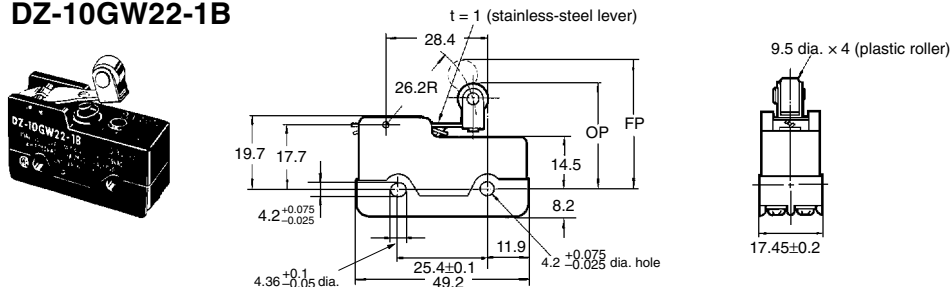

OF max.	3.92 N {400 gf}
RF min.	0.83 N {85 gf}
OT min.	0.9 mm
MD max.	2.4 mm
FP max.	39.7 mm
OP	30.2±0.8 mm



DZ-10GV22-1B

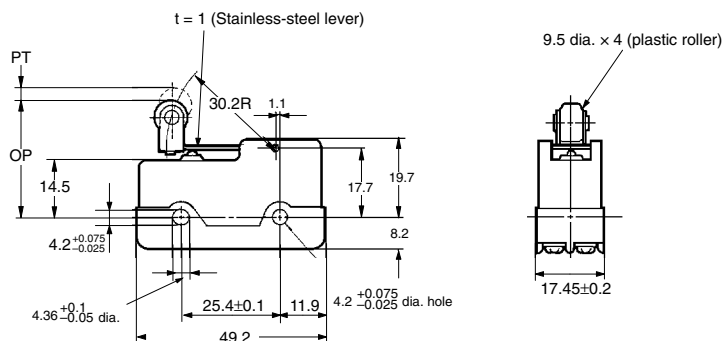

OF max.	4.22 N {430 gf}
RF min.	0.41 N {42 gf}
PT max.	3 mm
OT min.	0.13 mm
MD max.	0.6 mm
OP	29.4±0.8 mm



Hinge Roller Lever

DZ-10GW2-1B

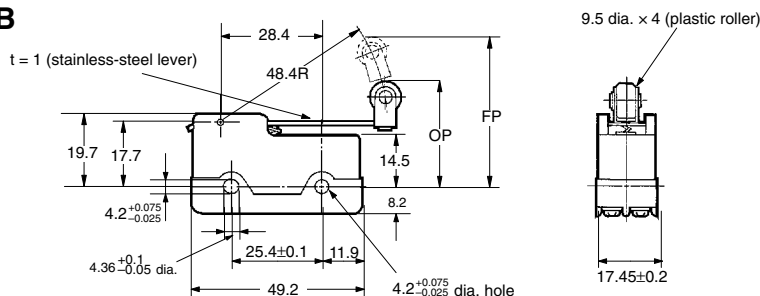

OF max.	2.09 N {213 gf}
RF min.	0.41 N {42 gf}
OT min.	1.2 mm
MD max.	3.3 mm
FP max.	47.6 mm
OP	31.8±0.8 mm

DZ-10GV2-1B

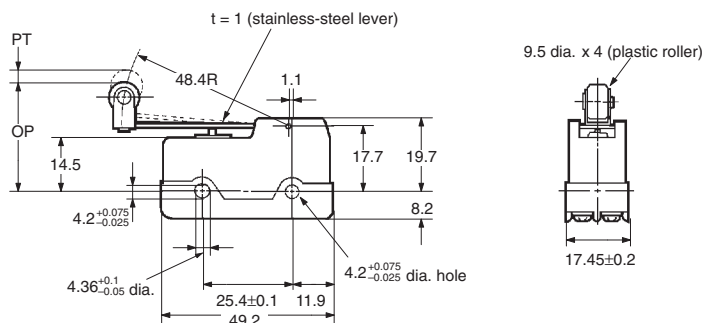

OF max.	2.65 N {270 gf}
RF min.	0.33 N {34 gf}
PT max.	4 mm
OT min.	0.26 mm
MD max.	1.1 mm
OP	29.4±0.8 mm

Precautions

■ Cautions

Terminal Connection

When soldering lead wires to the Switch, make sure that the capacity of the soldering iron is 60 W maximum. Do not take more than 5 s to solder any part of the Switch. Improper soldering may cause abnormal heat radiation from the Switch and the Switch may burn.

The characteristics of the Switch will deteriorate if a soldering iron with a capacity of more than 60 W is applied to any part of the Switch for 6 s or more.

Operation

Make sure that the switching frequency or speed is within the specified range.

1. If the switching speed is extremely slow, the contact may not be switched smoothly, which may result in a contact failure or contact welding.
2. If the switching speed is extremely fast, switching shock may damage the Switch soon. If the switching frequency is too high, the contact may not catch up with the speed.

The rated permissible switching speed and frequency indicate the switching reliability of the Switch.

The life of a Switch is determined at the specified switching speed. The life varies with the switching speed and frequency even when they are within the permissible ranges. In order to determine the life of a Switch model to be applied to a particular use, it is best to conduct an appropriate life expectancy test on some samples of the model under actual conditions.

Make sure that the actuator travel does not exceed the permissible OT position. The operating stroke must be set to 70% to 100% of the rated OT.

■ Correct Use

Mounting

Use M4 mounting screws with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 1.18 to 1.47 N • m {12 to 15 kgf • cm}.