


Low Signal Relay

G5A

- Subminiature 8.40 H x 9.90 W x 16 L mm (0.33 H x 0.38 W x 0.63 L in).
- Unique moving magnet armature reduces relay size, magnetic interference, and contact bounce time.
- Low nominal power consumption (200 mW).
- Bifurcated crossbar contact assures highly reliable switching of loads as low as 10 mVDC, 0.1 mA (reference value).
- Automatic flow or dip soldering possible.
- Available in standard, high-sensitivity, low thermoelectromotive force, and ultrasonic cleaning versions.
- Highly stable magnetic circuit for latching endurance and excellent resistance to vibration and shock.
- Single or double coil winding types available.
- RoHS Compliant.



Ordering Information

To Order: Select the part number and add the desired coil voltage rating (e.g., G5AU-234P-DC12).

■ Non-Latching

Type	Contact form	Construction	Model
Standard	DPDT	Semi-sealed	G5A-237P
		Sealed	G5A-234P
High-sensitivity		Semi-sealed	G5A-237PH
		Sealed	G5A-234PH

■ Latching

Type	Contact form	Construction	Model	
			Single-winding latching	Double-winding latching
Standard	DPDT	Semi-sealed	G5AU-237P	G5AK-237P
		Sealed	G5AU-234P	G5AK-234P
High-sensitivity		Semi-sealed	G5AU-237PH	--
		Sealed	G5AU-234PH	--

Specifications

■ Contact Data

Load	Resistive load (p.f. = 1)	Inductive load (p.f. = 0.4) (L/R = 7 ms)
Rated load	0.50 A at 30 VAC, 1 A at 30 VDC	0.10 A at 30 VAC, 0.20 A at 30 VDC
Contact material	Ag (Au clad)	
Carry current	1 A	
Max. operating voltage	125 VAC, 125 VDC	
Max. operating current	1 A (AC) 1 A (DC)	0.50 A (AC) 0.50 A (DC)
Max. switching capacity	37.50 VA, 33 W	12.50 VA 11 W
Min. permissible load	10 μA, 10 mVDC	

■ Coil Data

Standard Non-latching (G5A-237P, G5A-234P)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
5	40	125	0.13	0.12	70% max	10% min.	150%	Approx. 200
6	33.30	180	0.17	0.16				
9	22.20	405	0.43	0.40				
12	16.70	720	0.71	0.68				
24	8.30	2,880	2.76	2.70				
48	5.80	8,230	7.44	7.25				
								Approx. 280

High-sensitivity Non-latching Type (G5A-237PH, G5A-234PH)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
5	30	167	0.17	0.16	80% max.	10% min.	180%	Approx. 150
6	25	240	0.22	0.21				
9	16.70	540	0.58	0.54				
12	12.50	960	1	0.96				
24	6.50	3,700	3.90	3.80				

Single-winding Latching Type. (G5AU-237P, G5AU-234P)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Set pick-up voltage	Reset dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
3	66.70	45	0.02	0.02	80% max.	80% min.	200%	Approx. 200
5	40	125	0.06	0.05				
6	33.30	180	0.08	0.07				
9	22.20	405	0.17	0.14				
12	16.70	720	0.29	0.24				
24	8.30	2,880	1.10	0.85				

Double-winding Latching Type. (G5AK-237P, G5AK-234P)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Set pick-up voltage	Reset dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
3	66.70	45	0.02	0.02	80% max.	80% max.	200% max.	Approx. 200
5	40	125	0.06	0.05				
6	33.30	180	0.08	0.07				
9	22.20	405	0.17	0.14				
12	16.70	720	0.29	0.24				
24	8.30	2,880	1.10	0.85				

Single-winding Latching Type. High-sensitivity Version (G5AU-237PH, G5AU-234PH)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (ref. value) (H)		Set pick-up voltage	Reset dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
5	20	250	--	--	80% max.	80% max.	200% max.	Approx. 200
6	16.70	360	--	--				
9	11.10	810	--	--				
12	8.40	1,440	--	--				
24	4.20	5,760	--	--				

- Note:** 1. The rated current and coil resistance are measured at a coil temperature of 23°C (73°F) with a tolerance of ±10%.
 2. The operating characteristics are measured at a coil temperature of 23°C (73°F).




■ Characteristics

Type		Non-latching	Latching
Contact resistance		50 mΩ max.	
Operate (set) time		5 ms. max. (mean value approx 2.4 ms)	5 ms. max. (mean value approx. 2.0 ms)
Release (reset) time		5 ms. max. (mean value approx. 1.1 ms)	5 ms. max. (mean value approx. 1.8 ms)
Bounce time	Operate	Approx. 0.5 ms	
	Release	Approx. 0.5 ms	
Operating frequency	Mechanical	36,000 operations/hour	
	Electrical	18,000 operations/hour (under rated load)	
Insulation resistance		1,000 mΩ min. (at 500 VDC)	1,000 mΩ min. (at 250 VDC)
Dielectric strength	--	1,000 VAC, 50/60 Hz for 1 minute between coil and contacts	
	--	1,000 VAC, 50/60 Hz for 1 minute between contacts of different poles	
	Standard	500 VAC, 50/60 Hz for 1 minute between contacts of same pole	
	Set and reset coils	--	250 VAC, 50/60 Hz for 1 minute
Vibration	Mechanical durability	10 to 55 Hz; 1.50 mm (0.06 in) double amplitude	
	Malfunction durability	Malfunction durability 10 to 55 Hz; 1.50 mm (0.06 in) double amplitude	
Shock	Mechanical durability	Approx. 100 G	
	Malfunction durability	Approx. 30 G	
Ambient temperature		-40 to 70° C (-40 to 158° F)	
Humidity		45% to 85% RH	
Service life	Mechanical	50 million operations min. (at 18,000 operations/hour)	1 million operations min. (at 18,000 operations/hour)
	Electrical	See "Characteristic Data"	
Weight		Approx. 3 g (0.11 oz)	

Note: Data shown are of initial value.

Characteristic Data

Maximum Switching Capacity Electrical Service Life Ambient Temperature vs. Maximum Voltage (reference only)

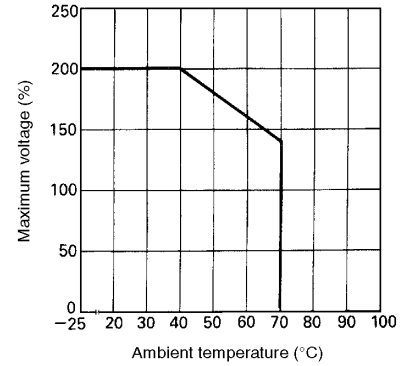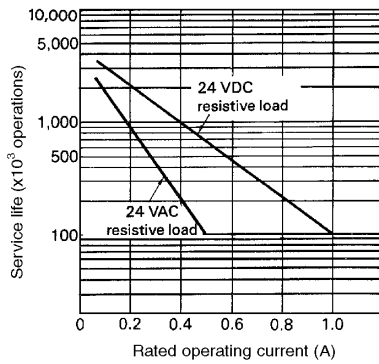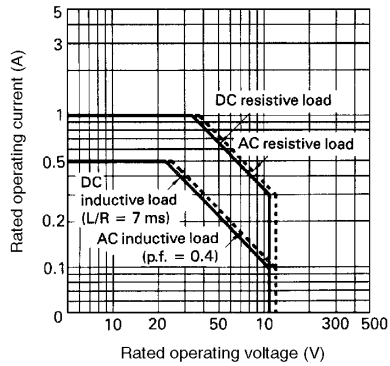


Dimensions


Unit: mm (inch)

Non-latching


G5A-237P, G5A-237PH

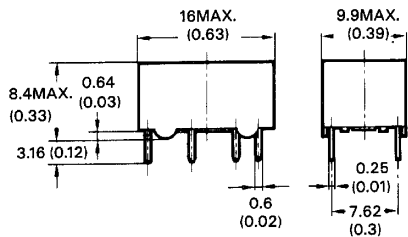


Internal connections (Bottom view)




Footprint (Bottom view)

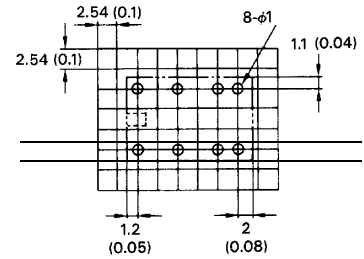


G5A-234P, G5A-234PH

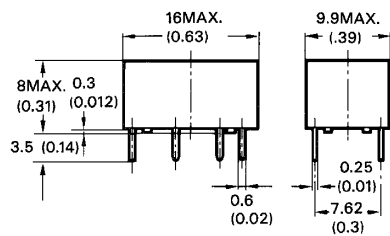

Internal connections (Bottom view)




Footprint (Bottom view)

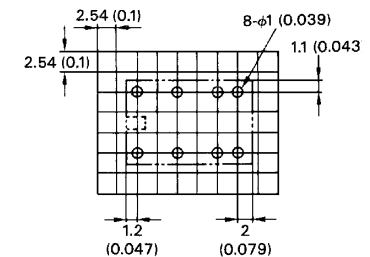


Note: 1. ate mounting orientation marks.

Latching


G5AU-237P, G5AU-237PH

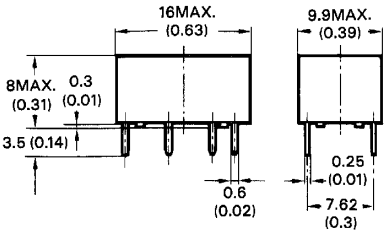


Internal connections (Bottom view)




Footprint (Bottom view)




G5AK-237P, G5AK-237PH

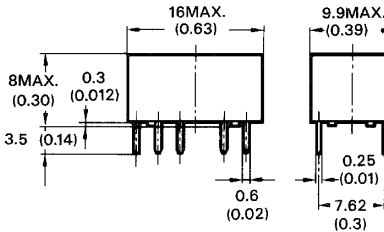


Internal connections (Bottom view)




Footprint (Bottom view)

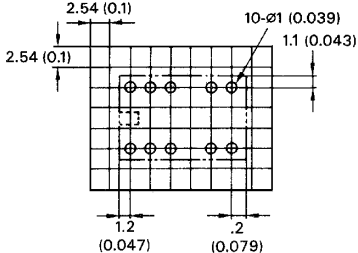


G5AU-234P, G5AU-234PH

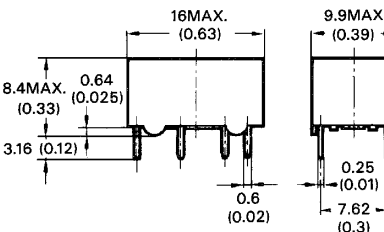


Internal connections (Bottom view)




Footprint (Bottom view)

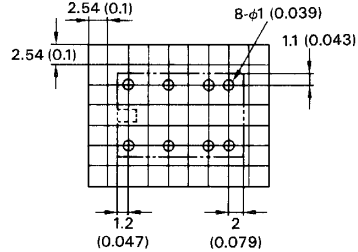


G5AK-234P, G5AK-234PH


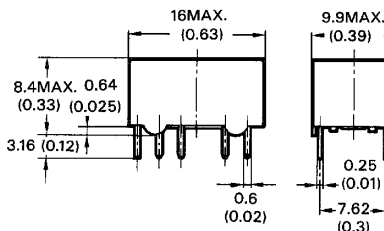


Internal connections (Bottom view)



Footprint (Bottom view)

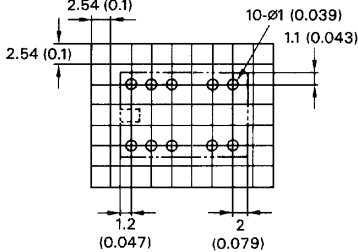

No   indicate mounting orientation marks.

■ Approvals

UL (File No. E41515)/CSA (File No. LR24825)

Type	Contact form	Coil ratings	Contact ratings
G5A-234P	DPDT	1.5 to 48 VDC	0.5 A, 60 VAC
G5A-234PH			1 A, 30 VDC
G5A-237P			
G5A-237PH			0.5 A, 60 VAC
G5AU-237P			0.5 A, 60 VDC
G5AU-237PH			1 A, 30 VDC
G5AK-237P			
G5AU-234P			
G5AU-234PH			
G5AK-234P			


- Note:** 1. The rated values approved by each of the safety standards (e.g., UL and CSA) may be different from the performance characteristics individually defined in this catalog.
2. In the interest of product improvement, specifications are subject to change.

Hints on Correct Use


Single-winding type (G5AU)

Example of low-power drive circuit

- The figure below shows a drive circuit (JAPAN PAT. NO. 1239293) in which the latching relay can function like a general-purpose relay from a normal input pulse for switching.
- Use a charging current of capacitor C to operate the latching relay, which flows suddenly through diode D1, capacitor C, latching relay, and diode D2, and the relay contacts will be put in the locked state.

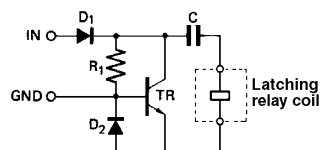

- Use a discharging current of capacitor C to release the latching relay, which flows through transistor TR, capacitor C, and the latching relay.



- Note:** 1. When applying the relay for practical use, make sure of the set or reset state of the relay; then determine the circuit constraints.
2. Because OMRON possesses the patent of this drive circuit, contact OMRON when adopting it.