





## VS2 Series Convergent Mode Sensor Features

- Extremely low profile self-contained miniature sensors
- 10 to 30V dc operation
- Visible red sensing beam
- Choose models with 15 mm or 30 mm convergent point
- Choose dark or light operate models
- Choose models with NPN (sinking) or PNP (sourcing) output
- 3-wire hookup; output load capacity to 50 mA
- Choice of integral cable or quick-disconnect connector

## VS2 Series Overview

VS2 Series miniature self-contained sensors are designed for precision sensing in small areas previously accessible only to remote or fiber optic models. Typical applications include mounting inside vibrating feeders and electronic component handling equipment, where larger sensors will not fit.



Visible red, 660 nm

## VS2 Series Convergent-Mode Sensors

Models*	Range	Cable	Supply Voltage	Output Type	Excess Gain	Beam Pattern
VS2AN5CV15 VS2AN5CV15Q	15 mm (0.6") ±5 mm	2 m (6.5') 3-Pin Pico QD	10 to 30V dc	NPN Light Operate		
VS2RN5CV15 VS2RN5CV15Q		2 m (6.5') 3-Pin Pico QD		NPN Dark Operate		
VS2AP5CV15 VS2AP5CV15Q		2 m (6.5') 3-Pin Pico QD		PNP Light Operate		
VS2RP5CV15 VS2RP5CV15Q		2 m (6.5') 3-Pin Pico QD		PNP Dark Operate		
VS2AN5CV30 VS2AN5CV30Q	30 mm (1.2") ±10 mm	2 m (6.5') 3-Pin Pico QD		NPN Light Operate		
VS2RN5CV30 VS2RN5CV30Q		2 m (6.5') 3-Pin Pico QD		NPN Dark Operate		
VS2AP5CV30 VS2AP5CV30Q		2 m (6.5') 3-Pin Pico QD		PNP Light Operate		
VS2RP5CV30 VS2RP5CV30Q		2 m (6.5') 3-Pin Pico QD		PNP Dark Operate		


# VS2 Series Convergent Mode

## VS2 Series Specifications


Supply Voltage and Current	10 to 30V dc (10% maximum ripple) at less than 25 mA (exclusive of load)
Supply Protection Circuitry	Protected against reverse polarity and transient voltages
Output Configuration	SPST solid-state switch Choose NPN (current sinking) or PNP (current sourcing) models Choose light operate (N.O.) or dark operate (N.C.) models
Output Rating	50 mA maximum <b>Off-state leakage current:</b> < 1 microamp at 24V dc <b>On-state saturation voltage:</b> < 0.25V at 10 mA dc; < 0.5V at 50 mA dc
Output Protection Circuitry	Protected against false pulse on power-up and continuous overload or short circuit of outputs Overload trip point $\geq$ 100 mA
Output Response Time	1 millisecond ON and OFF (NOTE: 150 millisecond delay maximum on power-up: output does not conduct during this time)
Repeatability	160 microseconds
Indicators	Two LEDs: Green and Yellow GREEN ON steadily = power to sensor is ON GREEN flashing = output overload YELLOW ON steadily = light is sensed
Construction	Black ABS housing with acrylic lens
Environmental Rating	IEC IP67; NEMA 6
Connections	2 m (6.5') attached cable: three #28 ga stranded conductors with PE insulation; PVC outer cable jacket; or 3-pin Pico-style pigtail quick-disconnect fitting. QD cables are ordered separately.
Operating Conditions	<b>Temperature:</b> -20° to +55°C (-4° to +131°F) <b>Maximum Relative Humidity:</b> 80% at 50°C (non-condensing)
Vibration and Mechanical Shock	<b>Vibration:</b> All models meet IEC 60068-2-6, IEC 60947-5-2, UL491 Section 40, MIL-STD-202F Method 201A; 10 to 60 Hz, 0.5 mm peak to peak <b>Shock:</b> All models meet IEC 60068-2-27, IEC 60947-5-2; 30g peak acceleration, 11 millisecond pulse duration, half-sine wave pulse shape
Application Notes	M2 stainless steel mounting hardware included. Optional mounting brackets are available (page 4).
Certifications	CE

## VS2 Series Sensor Hookups


Sensors with NPN Outputs  
Cabled hookup

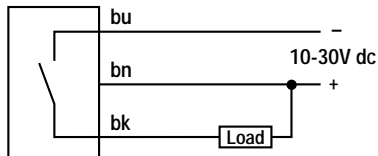


Sensors with PNP Outputs  
Cabled hookup

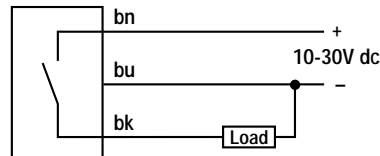

Quick-Disconnect hookup

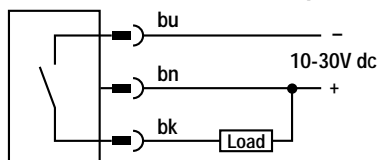

Quick-Disconnect hookup

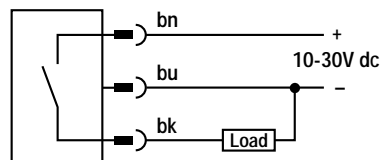

# VS2 Series Convergent Mode

## VS2 Series Convergent Mode Sensor Dimensions

