




ORION FANS

Standard and Custom Cooling Solutions with JIT Delivery Worldwide

Fan Cords & Daisy Chains

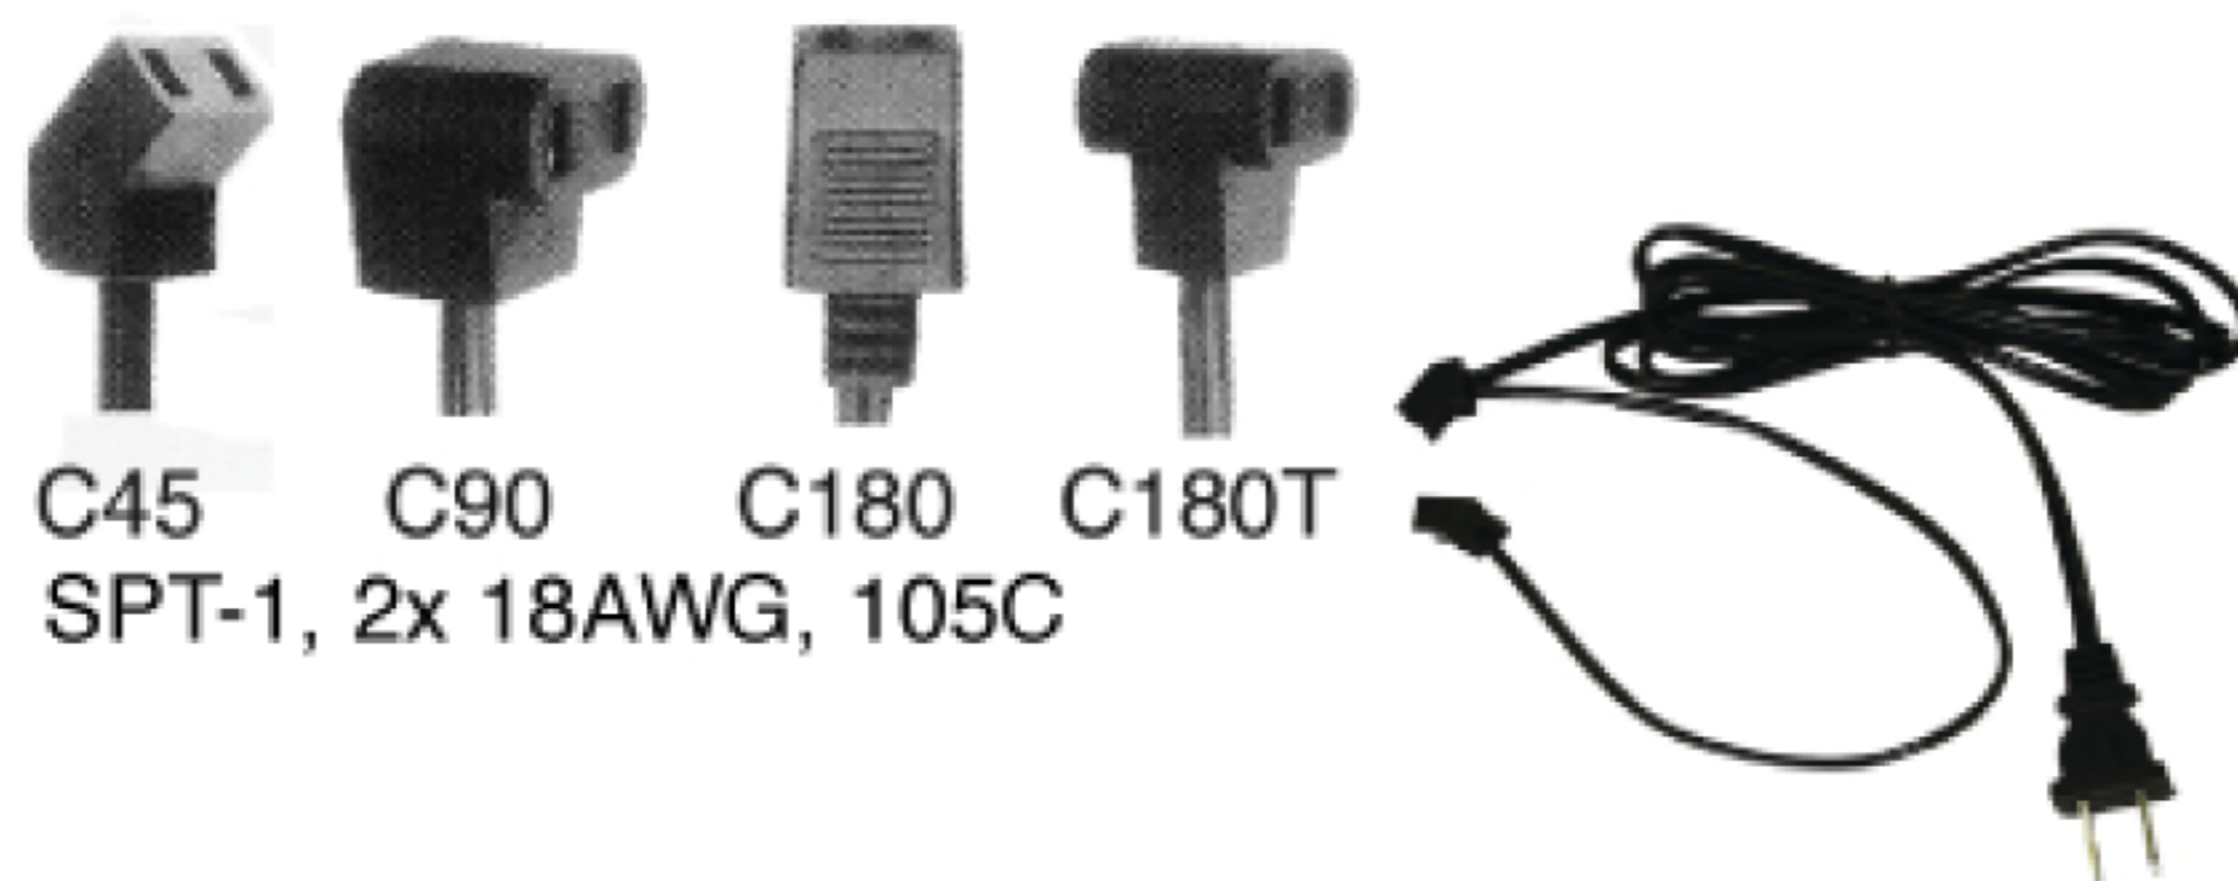

C45 C90 C180 C180T
SPT-1, 2x 18AWG, 105C



Customizing your part number-

Head	Number of Heads	Lead Length	Termination
C45 -	3DC -	72	P
<i>C45 = 45 deg. C90 = 90 deg. C180 = straight C180T = "T" shaped</i>	<i>blank = 1 2DC = 2 3DC = 3 4DC = 4 6DC = 6 9DC = 9</i>	<i>Lead length in inches. 12" increment is standard for stock prod- uct.</i>	<i>blank = blunt cut ST = Stripped and Tinned P = NEMA 1-15 AC plug added EURO = European plug</i>



For Terminal type Fans

Fans with terminals make connecting and disconnecting power a breeze.

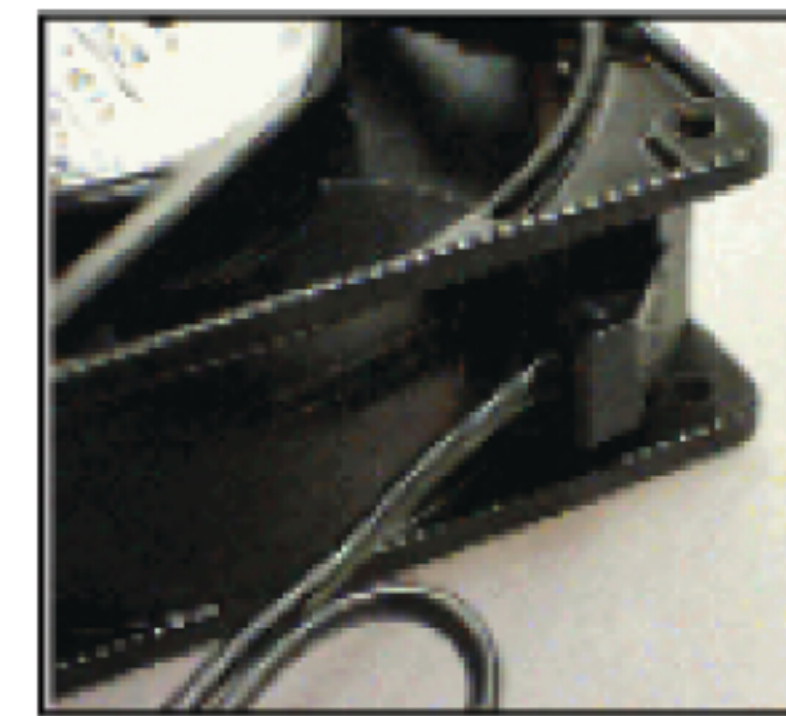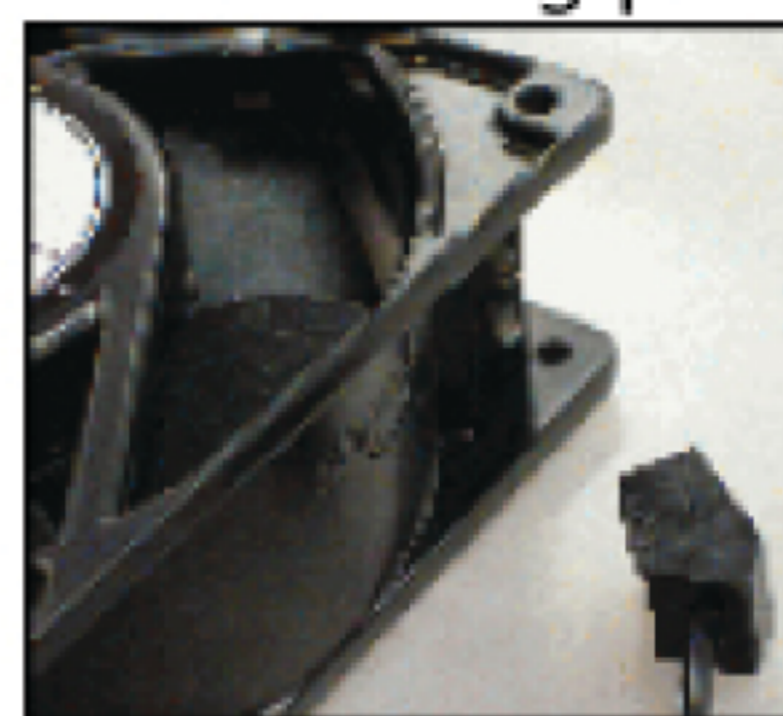

Stocked Cords

Part Number	Features
[12 inch Lead]	
C45-12	Standard cord, blunt cut, one head
C90-12	
C180-12	
C180T-12	
[24 inch Lead]	
C45-24	Standard cord, blunt cut, one head
C45-24P	AC plug added
C45-2DC-24	2-head daisy chain
C45-3DC-24	3-head daisy chain
C45-4DC-24	4-head daisy chain
C45-6DC-24	6-head daisy chain
C45-9DC-24	9-head daisy chain
C90-24	

Daisy Chains permit multiple connections of fans to a single power source.


Product is available from stock in 2, 3, 4, 6 and 9 head configurations with lead lengths ranging from 12 inches to 12 feet.

Each head is separated by 12 inches of cord.

Standard product is blunt cut, but cords are usually available with AC plugs on request for an additional charge.



UL Approved
Rating: 10 amp
 125/250VAC

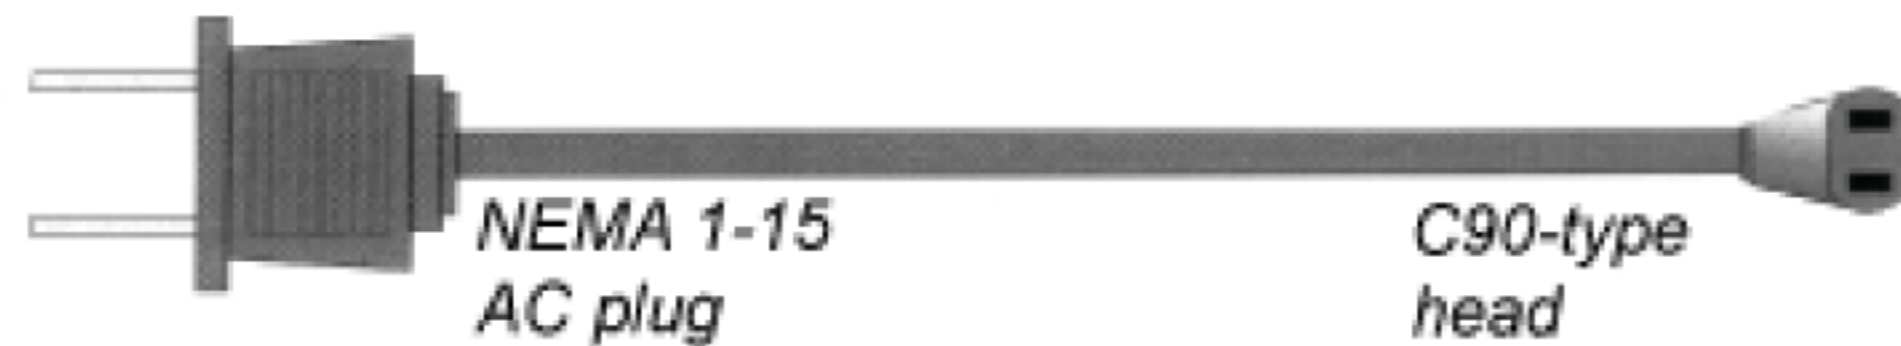

C180-24	Standard cord, blunt cut, one head
C180T-24	
[36 inch Lead]	
C45-36	
C90-36	Standard cord, blunt cut, one head
C180-36	
C180T-36	
[48 inch Lead]	
C45-48	Standard cord, blunt cut, one head
C45-48P	AC plug added
C90-48	
C180-48	Standard cord, blunt cut, one head
C180T-48	
[72 inch Lead]	
C45-72	Standard cord, blunt cut, one head
C45-3DC-72P	3-head daisy chain, AC plug added
C90-72	Standard cord, blunt cut, one head
C90-72P	AC plug added
C180-72	Standard cord, blunt cut, one head
C180T-72	
[144 inch Lead]	
C90-144P	AC plug added
C45-2DC-144P	2-head daisy chain, AC plug added