
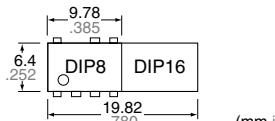


AQ-H SOLID STATE RELAY

AQ-H RELAYS

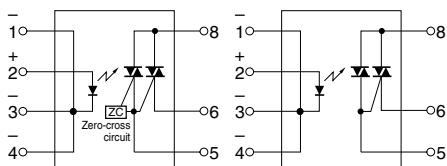

4. Handles both 100 and 200 V AC loads

This relay handles both voltages in a single product. It is not necessary for users that use both types to manage separate part numbers.

RoHS Directive compatibility information
<http://www.nais-e.com/>

FEATURES

1. Compact DIP type SSR that's ideal for AC load control
2. Supports 0.3 A, 0.6 A, 0.9 A and 1.2 A ON-state RMS currents.
3. The 1.2 A type saves space with a DIP 8-pin package. (Competitor only provides a 16-pin type.)
5. High dielectric strength: 5,000 V AC (between input and output)
6. Two types available: Zero-cross type and Non-zero-cross type

TYPICAL APPLICATIONS

1. Home appliances (air conditioners, microwave ovens, washing machines, personal hygiene systems, refrigerators, fan heaters, inductive heating cooker, and water heaters, etc.)
2. Industrial equipment market.

TYPES

Type	Output rating*		Type	Part No.			Packing quantity	
				Through hole terminal	Surface-mount terminal			
	Repetitive peak OFF-state voltage	ON-state RMS current		Tape and reel packing style		Tape and reel packing style	Tube	Tape and reel
AC type	600 V	0.3 A	Zero-cross	AQH0213	AQH0213A	AQH0213AX	AQH0213AZ	1 tube contains 40 pcs. 1 batch contains 400 pcs.
		0.6 A		AQH1213	AQH1213A	AQH1213AX	AQH1213AZ	
		0.9 A		AQH2213	AQH2213A	AQH2213AX	AQH2213AZ	
		1.2 A		AQH3213	AQH3213A	AQH3213AX	AQH3213AZ	
		0.3 A	Non zero-cross	AQH0223	AQH0223A	AQH0223AX	AQH0223AZ	
		0.6 A		AQH1223	AQH1223A	AQH1223AX	AQH1223AZ	
		0.9 A		AQH2223	AQH2223A	AQH2223AX	AQH2223AZ	
		1.2 A		AQH3223	AQH3223A	AQH3223AX	AQH3223AZ	

*Indicate the repetitive peak OFF-state voltage and ON-state RMS current: peak AC.

Note: For space reasons, the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQH0213(A) AQH0223(A) AQH1213(A) AQH1223(A) AQH2213(A) AQH2223(A) AQH3213(A) AQH3223(A)				Remarks			
Input	LED forward current	I _F	50 mA				f = 100 Hz, Duty Ratio = 0.1%			
	LED reverse voltage	V _R	6 V							
	Peak forward current	I _{FP}	1 A							
Output	Repetitive peak OFF-state voltage	V _{DRM}	600 V				60Hz, 1 cycle			
	ON-state RMS current	I _{T(RMS)}	0.3 A	0.6 A	0.9 A	1.2 A				
	Non-repetitive surge current	I _{TSM}	3 A	6 A	9 A	12 A				
I/O isolation voltage	V _{iso}	5,000 V AC								
Temperature limits	Operating	T _{opr}	-30°C to +85°C -22°F to +185°F				Non-condensing at low temperatures			
	Storage	T _{stg}	-40°C to +125°C -40°F to +257°F							

AQ-H


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQH0213(A)	AQH1213(A)	AQH2213(A)	AQH3213(A)	AQH0223(A)	AQH1223(A)	AQH2223(A)	AQH3223(A)	Condition		
Input	LED dropout voltage	Typical	V_F	1.18 V										
		Maximum		1.3 V						$I_F = 10 \text{ mA}$				
Output	LED reverse current	Typical	I_R	—						$V_R = 6 \text{ V}$				
		Maximum		10 μA										
	Peak OFF-state current	Typical	I_{DRM}	—						$I_F = 0 \text{ mA}$				
		Maximum		100 μA			$V_{DRM} = 600 \text{ V}$							
	Peak ON-state voltage	Typical	V_{TM}	—						$I_F = 10 \text{ mA}$				
		Maximum		2.5 V			$I_{TM} = \text{Max.}$							
	Holding current	Typical	I_H	—										
		Maximum		25 mA										
Critical rate of rise of OFF-state voltage			Minimum	dv/dt	200 V/ μs						$V_{DRM} = 600 \text{ V} \times 1/\sqrt{2}$			
Transfer characteristics	Trigger LED current*	Maximum	I_{FT}	10 mA						$V_D = 6 \text{ V}$				
	Zero-cross voltage**	Maximum	V_{zc}	50 V			—			$R_L = 100 \Omega$				
	Turn on time***	Maximum	T_{ON}	100 μs						$I_F = 20 \text{ mA}$				
	I/O isolation resistance	Minimum	R_{iso}	50 G Ω						500 V DC				

Notes: *Recommended LED current I_F : 20 mA


**Applicable part No.: AQH0213, AQH1213, AQH2213 and AQH3213.

***Turn on time

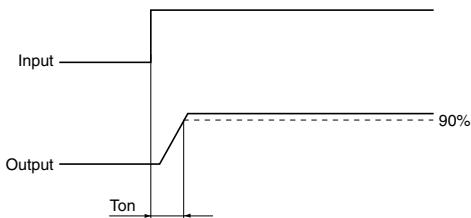


DIMENSIONS

Through hole terminal type

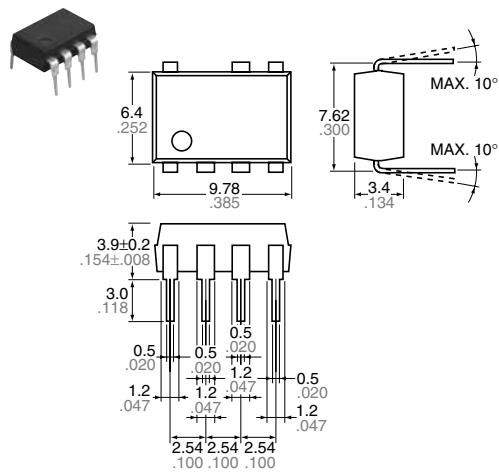


Terminal thickness: 0.25 .010
General tolerance: $\pm 0.1 \pm .004$

Surface mount terminal type

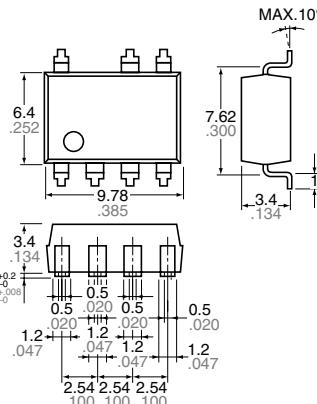


Terminal thickness: 0.25 .010
General tolerance: $\pm 0.1 \pm .004$

PC board pattern (BOTTOM VIEW)

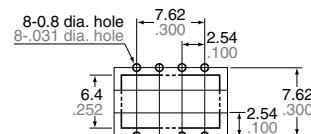

Tolerance: $\pm 0.1 \pm .004$




Recommended mounting pad (TOP VIEW)



Tolerance: $\pm 0.1 \pm .004$

SCHEMATIC AND WIRING DIAGRAMS


Notes: E₁: Power source at input side; I_f: Trigger LED forward current; V_L: Load voltage; I_L: Load current;

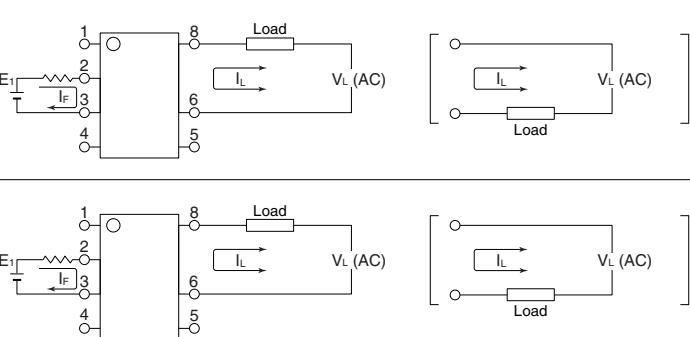Schematic	Output configuration	Load	Wiring diagram
	1a	AC	
			

REFERENCE DATA


1. ON-state RMS current vs. Ambient temperature characteristics

Allowable ambient temperature:
-30°C to +85°C -22°F to +185°F

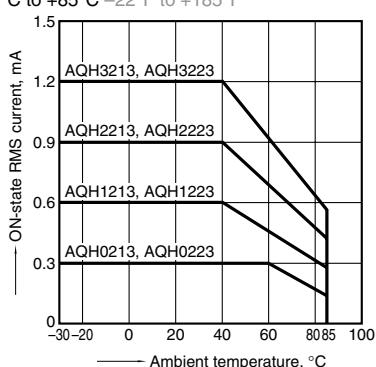


4. LED dropout voltage vs. Ambient temperature characteristics

LED current: 10 to 50 mA

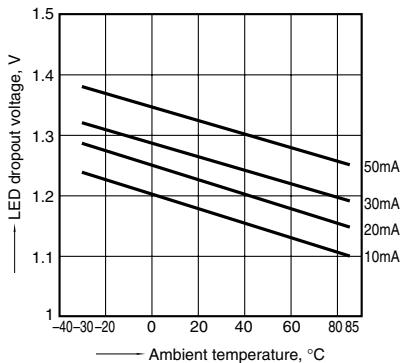


7. Hold current vs. Ambient temperature characteristics

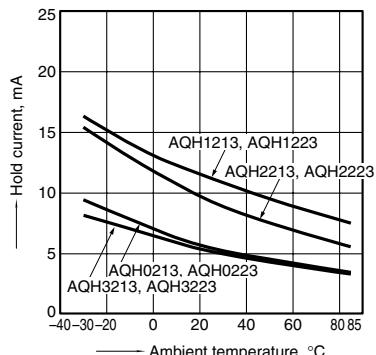


2. On voltage vs. Ambient temperature characteristics

LED current: 10 mA; ON current: Max.
Measured portion: between terminals 6 and 8

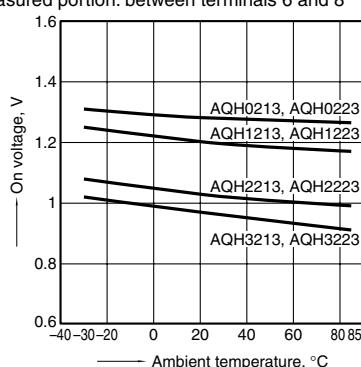


3. Trigger LED current vs. Ambient temperature characteristics

Load voltage: 6 V DC;
Load resistance: 100Ω

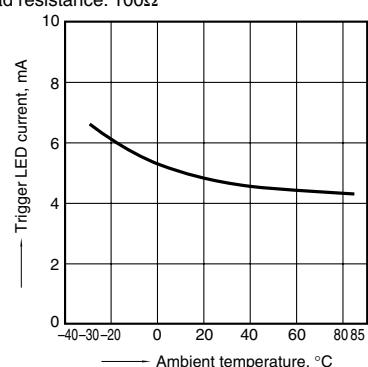


5. Turn on time vs. LED current characteristics

Load voltage: 6 V DC; Load resistance: 100Ω
Measured portion: between terminals 6 and 8

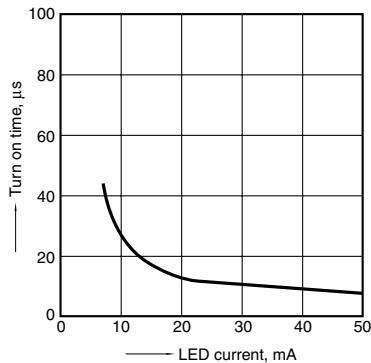


6. Repetitive peak OFF-state current vs. Load voltage characteristics

LED current: 0 mA; Measured portion: between terminals 6 and 8; Ambient temperature: 25°C 77°F

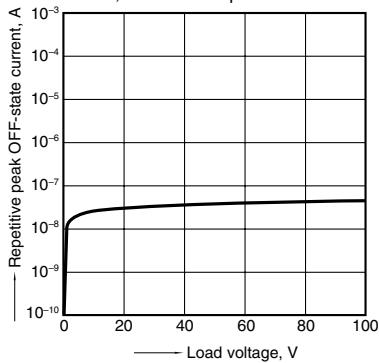

8. Zero-cross voltage vs. Ambient temperature characteristics

LED current: 10 mA

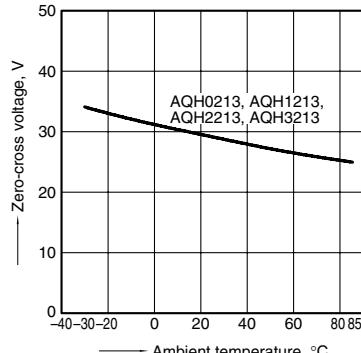

For Cautions for Use