



Highest sensitivity
LED operate current:
typical 0.31A

HS PhotoMOS (AQV234)

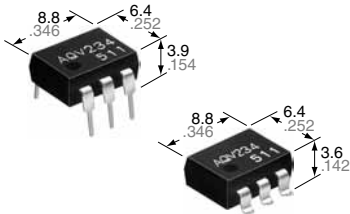

mm inch



FEATURES

- High sensitivity type**
LED operate current: typical 0.31 mA
- Low-level off state leakage current (Typical 1 μ A at 400 V load voltage)**
- Eliminates the need for a power supply to drive the power MOSFET**
- Low thermal electromotive force (Approx. 1 μ V)**
- Extremely low closed-circuit offset voltages to enable control of small analog signals without distortion**
- Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side**
- Stable on resistance to help simplify circuit design**
- Surface-mount model available**

TYPICAL APPLICATIONS

- High-speed inspection machines**
 - Scanner
 - IC checker
 - Board tester
- Telephone and data communication equipment**

RoHS Directive compatibility information
<http://www.mew.co.jp/ac/e/environment/>

TYPES

Type	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal			Tube	Tape and reel
	Load voltage	Load current	Tube packing style		Tape and reel packing style			
					Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
AC/DC type	400 V	120 mA	AQV234	AQV234A	AQV234AX	AQV234AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.

*Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package style indicator "X" or "Z" are not marked on the relay.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV234(A)	Remarks	
Input	LED forward current	I_F		50 mA		
	LED reverse voltage	V_R		5 V		
	Peak forward current	I_{FP}		1 A	$f = 100 \text{ Hz}$, Duty factor = 0.1%	
	Power dissipation	P_{in}		75 mW		
Output	Load voltage (Peak AC)	V_L		400 V		
	Continuous load current	I_L		A	0.12 A	A connection: Peak AC, DC B, C connection: DC
				B	0.13 A	
				C	0.15 A	
	Peak load current	I_{peak}		0.3 A	A connection: 100 ms (1 shot), $V_L = \text{DC}$	
Power dissipation	P_{out}	500 mW				
Total power dissipation		P_T		550 mW		
I/O isolation voltage		V_{iso}		1,500 V AC		
Temperature limits	Operating	T_{opr}		-40°C to +85°C -40°F to +185°F	Non-condensing at low temperature	
	Storage	T_{stg}		-40°C to +100°C -40°F to +212°F		

HS PhotoMOS (AQV234)


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV234(A)	Remarks	
Input	LED operate current	Typical	I_{Fon}	—	0.31 mA	$\Delta I_F/\Delta t \geq \text{Min. } 100 \mu\text{A/s}$ $I_L = \text{Max.}$	
		Maximum			0.5 mA		
	LED turn off current	Minimum	I_{Foff}	—	0.1 mA	$\Delta I_F/\Delta t \geq \text{Min. } 100 \mu\text{A/s}$ $I_L = \text{Max.}$	
		Typical			0.29 mA		
	LED dropout voltage	Typical	V_F	—	1.25 V (1.1 V at $I_F = 2 \text{ mA}$)		$I_F = 50 \text{ mA}$
Maximum		1.5 V					
Output	On resistance	Typical	R_{on}	A	30 Ω	$I_F = 2 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time	
		Maximum			50 Ω		
		Typical	R_{on}	B	22.5 Ω	$I_F = 2 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time	
		Maximum			25 Ω		
	Typical	R_{on}	C	11.3 Ω	$I_F = 2 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time		
	Maximum			12.5 Ω			
	Off state leakage current		Maximum	—	—	1 μA	$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$
Transistor characteristics	Switching speed	Turn on time*	Typical	T_{on}	—	0.89 ms	$I_F = 2 \text{ mA}$ $I_L = \text{Max.}$
			Maximum			2 ms	
		Turn off time*	Typical	T_{off}	—	0.22 ms	$I_F = 2 \text{ mA}$ $I_L = \text{Max.}$
			Maximum			1 ms	
	I/O capacitance		Typical	C_{iso}	—	0.8 pF	$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$
			Maximum			1.5 pF	
Initial I/O isolation resistance		Minimum	R_{iso}	—	1,000 M Ω	500 V DC	

Note: Recommendable LED forward current $I_F = 2 \text{ mA}$.

For type of connection.

*Turn on/Turn off time

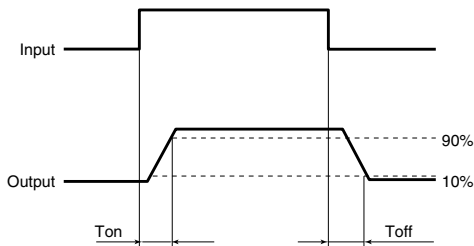


- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^\circ\text{C}$
 -40°F to $+185^\circ\text{F}$

Type of connection: A



2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 2 mA; Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)



3. Turn on time vs. ambient temperature characteristics

LED current: 2 mA;
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

