




BM4S-C

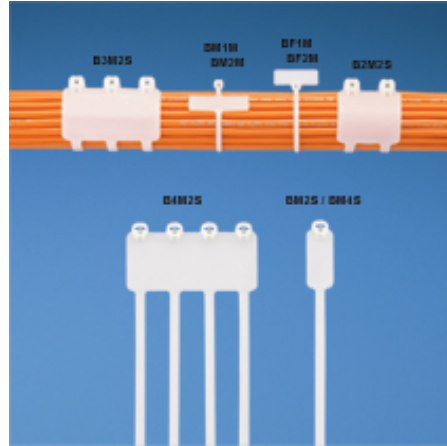


- For indoor use
- Used to fasten and identify bundles at the same time
- Stainless steel locking barb provides consistent performance, reliability and infinite adjustability through entire bundle range
- Can be marked with *PANDUIT* Marker Pens or custom imprinted with text, symbols or trademarks available using *PANDUIT* Custom Hot Stamping Service
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

• Part Number	BM4S-C
• RoHS Compliancy Status	Compliant
• Part Description	Marker Tie with metal barb, Wrap, 15.1", Standard cross section
• Product Type	Cable Ties
• Material	Nylon 6.6
• Color	Natural
• CSA Certified	Yes
• Mil. Std. Part Number	MS3368-2-9A
• UL Listed (File #E56854)	No
• UL Recognized (File #E56854)	Yes
• Length (In.)	15.1
• Length (mm)	384
• Width (In.)	.185
• Width (mm)	4.7
• CE Compliant	Yes
• Cross Section	Standard
• Head Height (In.)	.220
• Head Height (mm)	5.6
• Head Width (In.)	.320
• Head Width (mm)	8.1
• Locking Style	Locking
• Marker Type	Wrap
• Marker Write-On Area (In.)	.50 x 2.13
• Marker Write-On Area (mm)	12.7 x 54.1
• Material Flammability Rating	UL 94V-2

■ Max. Bundle Diameter (In.)	4.00
■ Max. Bundle Diameter (mm)	102
■ Max. Continuous Use Temperature	185°F (85°C)
■ Min. Loop Tensile Strength (Lbs.)	50
■ Min. Loop Tensile Strength (N)	222
■ Pricing Description	Marker Tie, Wrap, 15.1"L (384mm), Standard, Nylon, Natural
■ Thickness (In.)	.052
■ Thickness (mm)	1.3
■ Tool	GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2
■ Min. Order UOM	PC
■ Min. Order Qty.	100
■ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

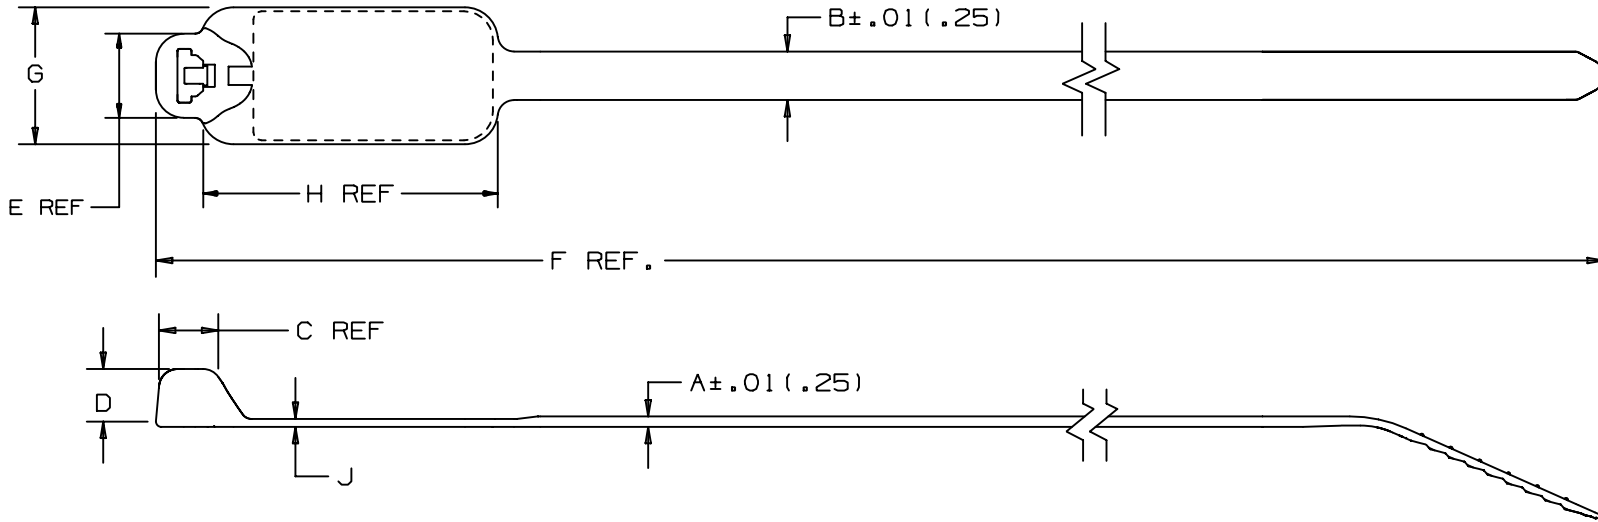

PANDUIT * PART NUMBER	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	H in (mm)	J in (mm)	WRITE-ON AREA in. (mm)	MIN. LOOP TENSILE ¹ lbs. (N)	CROSS SECTION	WEIGHT lbs./ 100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)													
BM2S	.37 (9.5)	2.00 (51)	.045 (1.2)	.185 (4.7)	.205 (5.2)	.220 (5.6)	.320 (8.1)	8.0 (203)	.520 (13.2)	1.1 (27.9)	.032 (.81)	.49 X .91 (12.4 X 23.1)	50 (222)	STANDARD	.30 (135)
BM4S	.75 (19)	4.00 (102)	.052 (1.3)	.185 (4.7)	.205 (5.2)	.220 (5.6)	.320 (8.1)	15.1 (384)	.520 (13.2)	2.3 (58.4)	.048 (1.22)	.50 X 2.13 (12.7 X 54.1)	50 (222)	STANDARD	.68 (307)

NOTES:

*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

										DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS							
										PANDUIT CORP. TINLEY PARK, ILLINOIS							
										BARB-TY MARKER TIE BM SERIES							
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± ---- (.XXX) ± .020 (.5) (.XX) ± .02 (.5) ANGLES ± ----				UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.			
										DRAWN BY JABO		MAT'L: NYLON 6/6		SCALE NONE			
										DATE 6/03/97				DRAWING NO. BT-0250		DWG A SIZE	
										CHK'D JVL							
5	10/9/01	JABO		REMOVED OBSOLETE PART, BM3S.				0250	5								
REV	DATE	BY	CHK	DESCRIPTION				ECN - R	CUST	SUP							