



## CBR3I-M




- For indoor use
- Unique design prevents wire and cable damage
- Low profile head avoids snags and reduces overall bundle size
- Outside teeth and smooth round edges protect cable jacket – ideal for high vibration applications
- Parallel-entry limits exposure to sharp edges and protects workers' arms/hands
- Fully enclosed head for consistent strength
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

■ Part Number	CBR3I-M
■ RoHS Compliancy Status	Compliant
■ Part Description	<i>Contour-Ty®</i> Cable Tie, Parallel-entry, 10.4", Intermediate cross section
■ Product Type	Cable Ties
■ Material	Nylon 6.6
■ Color	Natural
■ CSA Certified	Yes
■ Mil. Std. Part Number	MS3367-34-9
■ UL Listed (File #E56854)	Yes
■ UL Recognized (File #E56854)	Yes
■ Length (In.)	10.4
■ Length (mm)	264
■ Width (In.)	.140
■ Width (mm)	3.6
■ CE Compliant	Yes
■ Cross Section	Intermediate
■ Head Height (In.)	.192
■ Head Height (mm)	4.9
■ Head Width (In.)	.262
■ Head Width (mm)	6.7
■ Locking Style	Locking
■ Material Flammability Rating	UL 94V-2
■ Max. Bundle Diameter (In.)	3.00
■ Max. Bundle Diameter (mm)	76
■ Max. Continuous Use Temperature	185°F (85°C)
■ Min. Loop Tensile Strength (Lbs.)	40

■ Min. Loop Tensile Strength (N)	178
■ Pricing Description	Cable Tie, In-Line, 10.4"L (264mm), Intermediate, Nylon, Natural
■ Thickness (In.)	.052
■ Thickness (mm)	1.3
■ Tool	GTS, GTSL, GS2B, PTS, PPTS, STS2
■ Min. Order UOM	PC
■ Min. Order Qty.	1000
■ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

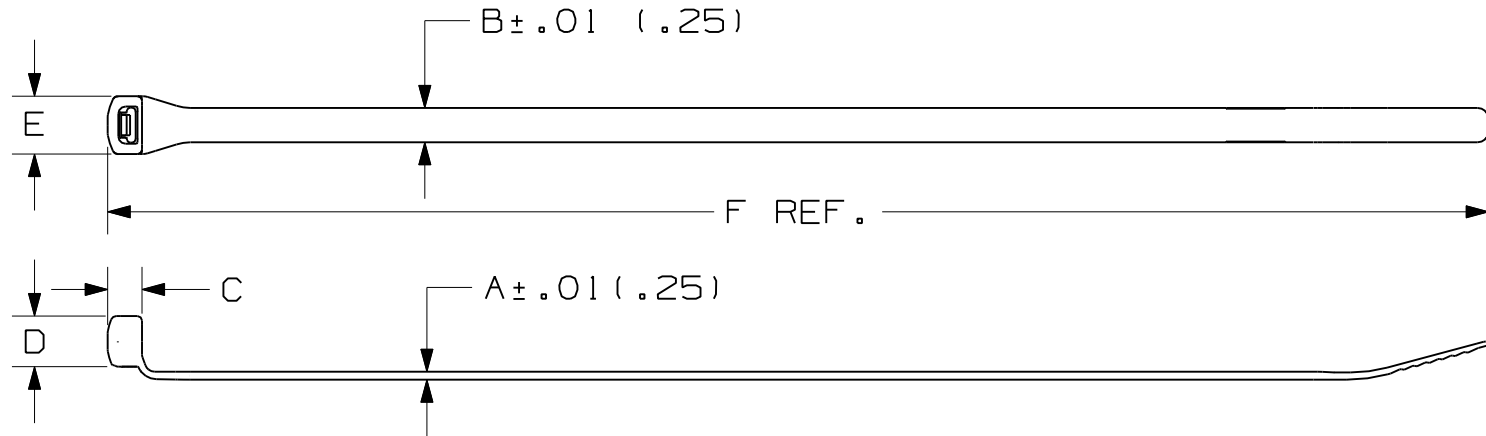

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs/100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)									
CBR1M	.070 (1.8)	1.0 (25.4)	.038 (1.0)	.098 (2.5)	.140 (3.6)	.208 (5.3)	.195 (5.0)	4.1 (104.1)	18 (80)	MINIATURE	.061 (27.7)
CBR1.5M	.070 (1.8)	1.5 (38.1)	.042 (1.1)	.098 (2.5)	.146 (3.7)	.208 (5.3)	.209 (5.3)	5.6 (142.2)	18 (80)	MINIATURE	.084 (38.3)
CBR2M	.070 (1.8)	2.0 (50.8)	.042 (1.1)	.098 (2.5)	.146 (3.7)	.208 (5.3)	.209 (5.3)	7.2 (182.9)	18 (80)	MINIATURE	.108 (48.8)
CBR1.5I	.070 (1.8)	1.5 (38.1)	.040 (1.0)	.140 (3.6)	.180 (4.6)	.250 (6.4)	.250 (6.4)	5.9 (149.9)	40 (178)	INTERMEDIATE	.129 (58.5)
CBR3I	.070 (1.8)	3.0 (76.2)	.052 (1.3)	.140 (3.6)	.192 (4.9)	.250 (6.4)	.262 (6.7)	10.4 (264.2)	40 (178)	INTERMEDIATE	.26 (119.3)
CBR4I	.070 (1.8)	4.0 (101.6)	.052 (1.3)	.140 (3.6)	.192 (4.9)	.250 (6.4)	.262 (6.7)	13.6 (345.4)	40 (178)	INTERMEDIATE	.34 (153.2)

NOTE(S) :

- \* SEE CURRENT PRICE SHEET TO DETERMINE PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

SS-27318-00

PANDUIT CORP. TINLEY PARK, ILLINOIS

CBR SERIES CABLE TIE

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±.01(.25) (.XXX) ±.020(.51)  
(.XX) ±.02(.5) ANGLES ± \_\_\_\_\_

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY  
JABO  
DATE  
6/22/01  
CHK'D  
JRJR

MAT'L:  
NYLON 6.6

SCALE  
NONE

DRAWING NO.  
SS-27318

DWG  
A  
SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
--	----	--		CORRECTED MATERIAL NAME	----	--		
3	5/31/06	JABO		CORRECTED CBR1M CROSS-SECTION TYPO	27318	3		