




CLT50F-C20

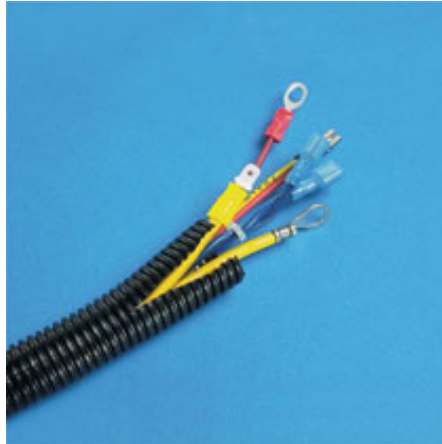

- Corrugated Loom Tubing is offered for applications where spiral wrap or braided expandable sleeving may be difficult to install or where they do not offer the amount of protection required. This version features a lengthwise slit which makes it easy to install onto a bundle of wires or a pre-assembled harness assembly.
 - Protects and reduces the risk of damage to wiring
 - Crush impact and abrasion resistant
 - Slit wall design for ease of installation
 - Hold in place with push type cable ties adhesive or push type mount
 - Bundle wires in control panels
 - * Order number of reels required.
- Contact Customer Service for additional sizes, materials, colors and bulk packaging.

■ Part Number	CLT50F-C20
■ RoHS Compliancy Status	Compliant
■ Part Description	Slit Corrugated Loom Tubing is offered for applications where Spiral Wrap or Braided Expandable Sleeving may be difficult to install or they do not offer the amount of protection required.
■ Material	Polyethylene
■ Color	Black
■ Flammability Rating	UL94 HB
■ Ft. Per Pkg.	100
■ Inside Diameter (In.)	.51
■ Inside Diameter (mm)	12.8
■ Length Per Reel (ft.)	100
■ Length Per Reel (m)	30.5
■ Outside Diameter (In.)	.67
■ Outside Diameter (mm)	17.0
■ Pricing Description	Corr. Loom Tubing Slit, .50" (12.7mm) x 100', Black
■ Temperature Range	-40°F to 122°F (-40°C to 50°C)
■ Min. Order UOM	RL
■ Min. Order Qty.	1
■ BOM Qty. (# of Pkgs.)	