


DNT-100



- A heavy duty tool used to notch slotted wall wiring duct from the bottom of a slot to the base of the duct. Used with all sizes of slotted wall wiring duct.
- Notches duct sidewalls to bottom scoreline for tee and corner junctions

■ Part Number	DNT-100						
■ RoHS Compliancy Status	RoHS directive is not applicable						
 Part Description 	Hand-held sidewall notching tool.						
 Pricing Description 	Duct Notching Tool						
■ Tool Type	Tooling						
Min. Order UOM	PC						
Min. Order Qty.	1						
■ BOM Qty. (# of Pkgs.)							

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

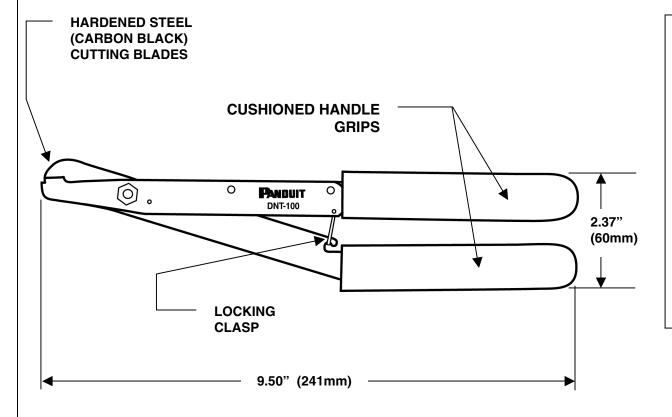

NOTES:

For use with *PANDUCT* Plastic Wiring Duct.

- Used to notch the duct sidewall down to the scoreline to facilitate finger breakouts for corner and 'T' junctions.
- Spring loaded in open position.
 (Closed position shown in drawing.)

DIMENSIONS ARE FOR REFERENCE ONLY.

WEIGHT: 9.1 oz.

(258 gr.)

F:/rvusers/engdocsnew/custdwg/ WD24978A01_00 DNT-100.doc

										TIUDNA	CORP. TINLEY PARK, ILLINOI	IS	
									DNT-100 DUCT NOTCHING TOOL				
									CUSTOMER DRAWING				
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: SPECIFIED, ALL DIMENSIONS				
									(.x) ±	(.xxx) ±	(.xxx) ± ARE GIVEN IN INCHES, THIR		
									(.xx) ±	ANGLES ± ANGLE PRO			
									DRAWN BY:	MATL:	SCALE		
									BLR		NONE		
00	3-15-05	BLR	MBR	RLSD; RPLCS: DNT-09534A-CD	4153		DLWE		DATE: 3-15-05		DRAWING NO. WD24978A01	DWG	
REV	DATE	вү	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP	CHK'D: MBR		WD24976A01	SIZE	