

Current refinements (click to remove)

[Search Tips](#) 
 [Region](#) **USA** [Product Family](#) **Female Disconnect, Vinyl Barrel Insulated – Butted Seam** [Text Search](#): 'DV10-250-L'

Your search criteria matched only one product, shown below.


- Disconnect can be inserted and removed from the male tab without the use of tools for lower installed cost
- Metal insulation grip sleeve crimps to wire insulation, providing protection to the crimp joint during high vibration applications
- Internal barrel serrations assure good wire contact and maximum tensile strength
- Internal wire stop assures proper length of insertion into terminal barrel, providing a higher quality connection
- UL Flammability UL 94V-0, maximum insulation temperature 221°F (105°C)

‡UL and CSA approved tooling/product combinations.

^ CSA approved tooling/product combinations.

Related Products
[Male Disconnect, Vinyl Barrel Insul...](#)
[Contour Crimp™ Control...](#)
[Wire and Cable Stripping Tools](#)
[Industrial Maintenance Kits](#)

Part Number:	DV10-250-L
RoHS Compliancy Status:	Compliant
Part Description:	Female Disconnect, vinyl barrel insulated, butted seam, 12 – 10 AWG, .250 x .032 tab size.
Product Type:	Disconnects
CSA Certified:	Yes
UL Recognized:	Yes
Height (In.):	.13
Length (In.):	1.03
Width (In.):	.30
Max. Ins.:	.229
Panduit Color Code:	Yellow
Tab Size (In.):	.250 x .032
Tool:	CT-1550 [‡] , CT-1551 [‡] , CT-2500
Wire Range:	12 – 10 AWG
Min. Order UOM:	PC
Min. Order Qty.:	50
BOM Qty. (# of Pkgs.)	

[Add to My Catalog](#)


 Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'My Catalog' features.

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	TAB SIZE	WIRE RANGE AWG	COLOR	MAX. INSUL.	DIMENSIONS in.		
					A ±.03	B ±.01	C ±.01
DV10-250	.250 X .032	12-10	YELLOW	.229 (5.82)	1.03 (26.16)	.30 (7.62)	.13 (3.30)

NOTES:

- UL RECOGNIZED AND CSA CERTIFIED FOR:
 - 600V MAX VOLTAGE RATING
 - 194°F (90°C) MAX TEMP RATING
 - STRANDED COPPER WIRE ONLY
 - 6-12 LBS INITIAL INSERTION/WITHDRAWAL FORCE
- MATERIAL:
 - STAMPING-BRASS, TIN PLATED
 - HOUSING-VINYL
 - SLEEVE-BRASS, TIN PLATED
- DIMENSIONS IN BRACKETS ARE IN mm OR mm²
- INSTALLATION TOOLS: UL/CSA: CT-550, CT-1551, CT-1550
 PANDUIT RECOMMENDED: CT-100, CT-160, CT-260, CT-460
- PACKAGE QTY: -L=50, -D=500
- WIRE STRIP LENGTH: 9/32 ^{+1/32}₋₀ (7.1 ⁺⁸₋₀)

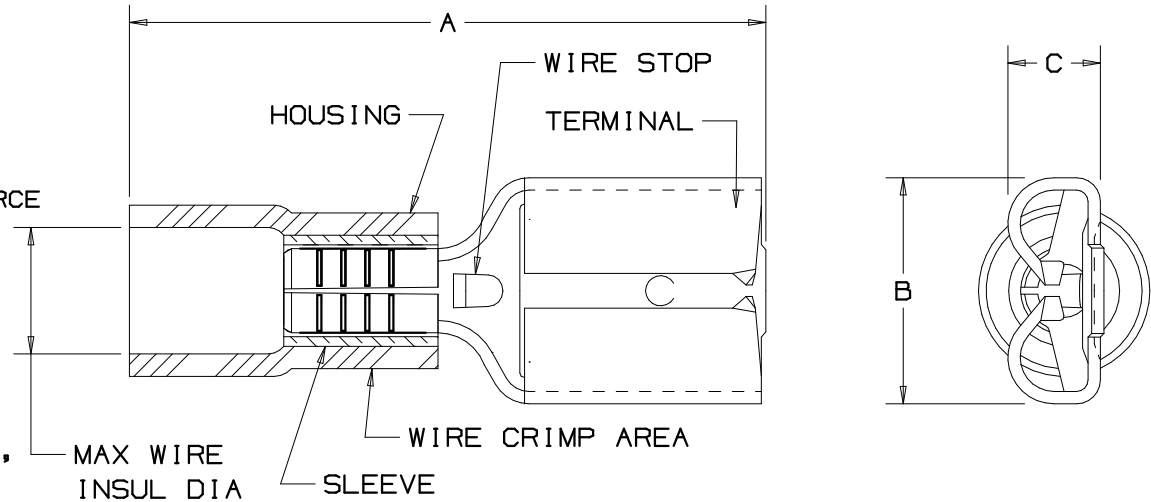

CERTIFIED
LR31212



RECOGNIZED
E78522

06	6/06	DAW	DAW	REMOVED MAX. AMPERAGE NOTE			
05	7/03	KLFU	SKB	ADDED INTERNAL SERRATIONS	12453	SKB	TRO
04	1/01	KMD	SKB	CAD FILE SPEC. WAS N41199AA_PCD_03	8938	JAC	CCH
03	5/99	JKD		ADDED CT-1551 & CT-1550 TOOLS	07642		
02	3/95	MS	RLS	UPDATED NOTES AND DIMENSIONS	03048	LA	JB
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM

A41199_06

PANDUIT CORP.

TINLEY PARK, ILLINOIS

FEMALE DISCONNECTS, VINYL INSULATED
.250 X .032

DRAWN BY FES	CHK'D RLS	SCALE NONE	DRAWING NO. A41199
-----------------	--------------	---------------	-----------------------