




F1X3WH6

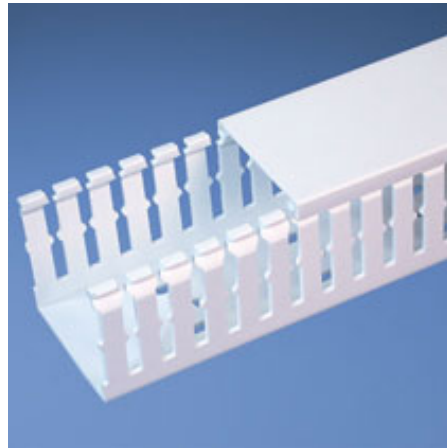

- Choose from 29 sizes of *PANDUIT*® Type F Wiring Duct from 0.5" x 0.5" up to 4.0" x 5.0". Used for general purpose control panel wiring in communication closets. Ideal for use with high-density terminal blocks. The non-slip cover conceals all wiring and is easy to install. The duct and cover form a flush sidewall providing increased capacity and improved aesthetics.

- **Specifications**

- Made of lead-free PVC
- UL Recognized continuous use temperature: 122°F (50°C)
- UL94 Flammability Rating of V-0
- Conforms with NFPA 79-2002 section 14.3.1 requirement for flame retardant material
- Available in Light Gray and White
- Provided with mounting holes

- **Features and Benefits**


- Narrow finger/slot design allows further fanning of wires for neater wire management in high-density control panels
- *PANDUIT*® exclusive rounded edges protects hands and wiring/cabling from abrasion
- Non-slip cover stays in place during shipment, vibration and when in a vertical orientation, eliminating rework
- Flush cover design holds 10-12% more wires than traditional duct designs
- Double scoreline allows quick modification for larger cabling bundles saving installation time leading to a lower installed cost
- Specially formulated lead-free material eliminates health concerns associated with PVC that contains lead
- Double restricted slot design retains wire in slot for fast, easy wire installation or removal

- Base and cover sold separately.

▪ Part Number	F1X3WH6
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Narrow finger, slotted wiring duct.
▪ Material	Lead-Free PVC
▪ Color	White
▪ CSA Certified	Yes
▪ Length (ft.)	6
▪ CE Marking	Yes
▪ Duct Size W x H (In.)	1.26 x 3.12
▪ Duct Size W x H (mm)	32.0 x 79.2
▪ Mounting Method	Standard Mounting Holes
▪ Pricing Description	Slotted Duct,PVC,1"X3"X6',White
▪ Slot Width (In.)	0.20
▪ Slot Width (mm)	5.0

▪ Cover Part Number	C1WH6
▪ Min. Order UOM	FT
▪ Min. Order Qty.	6
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

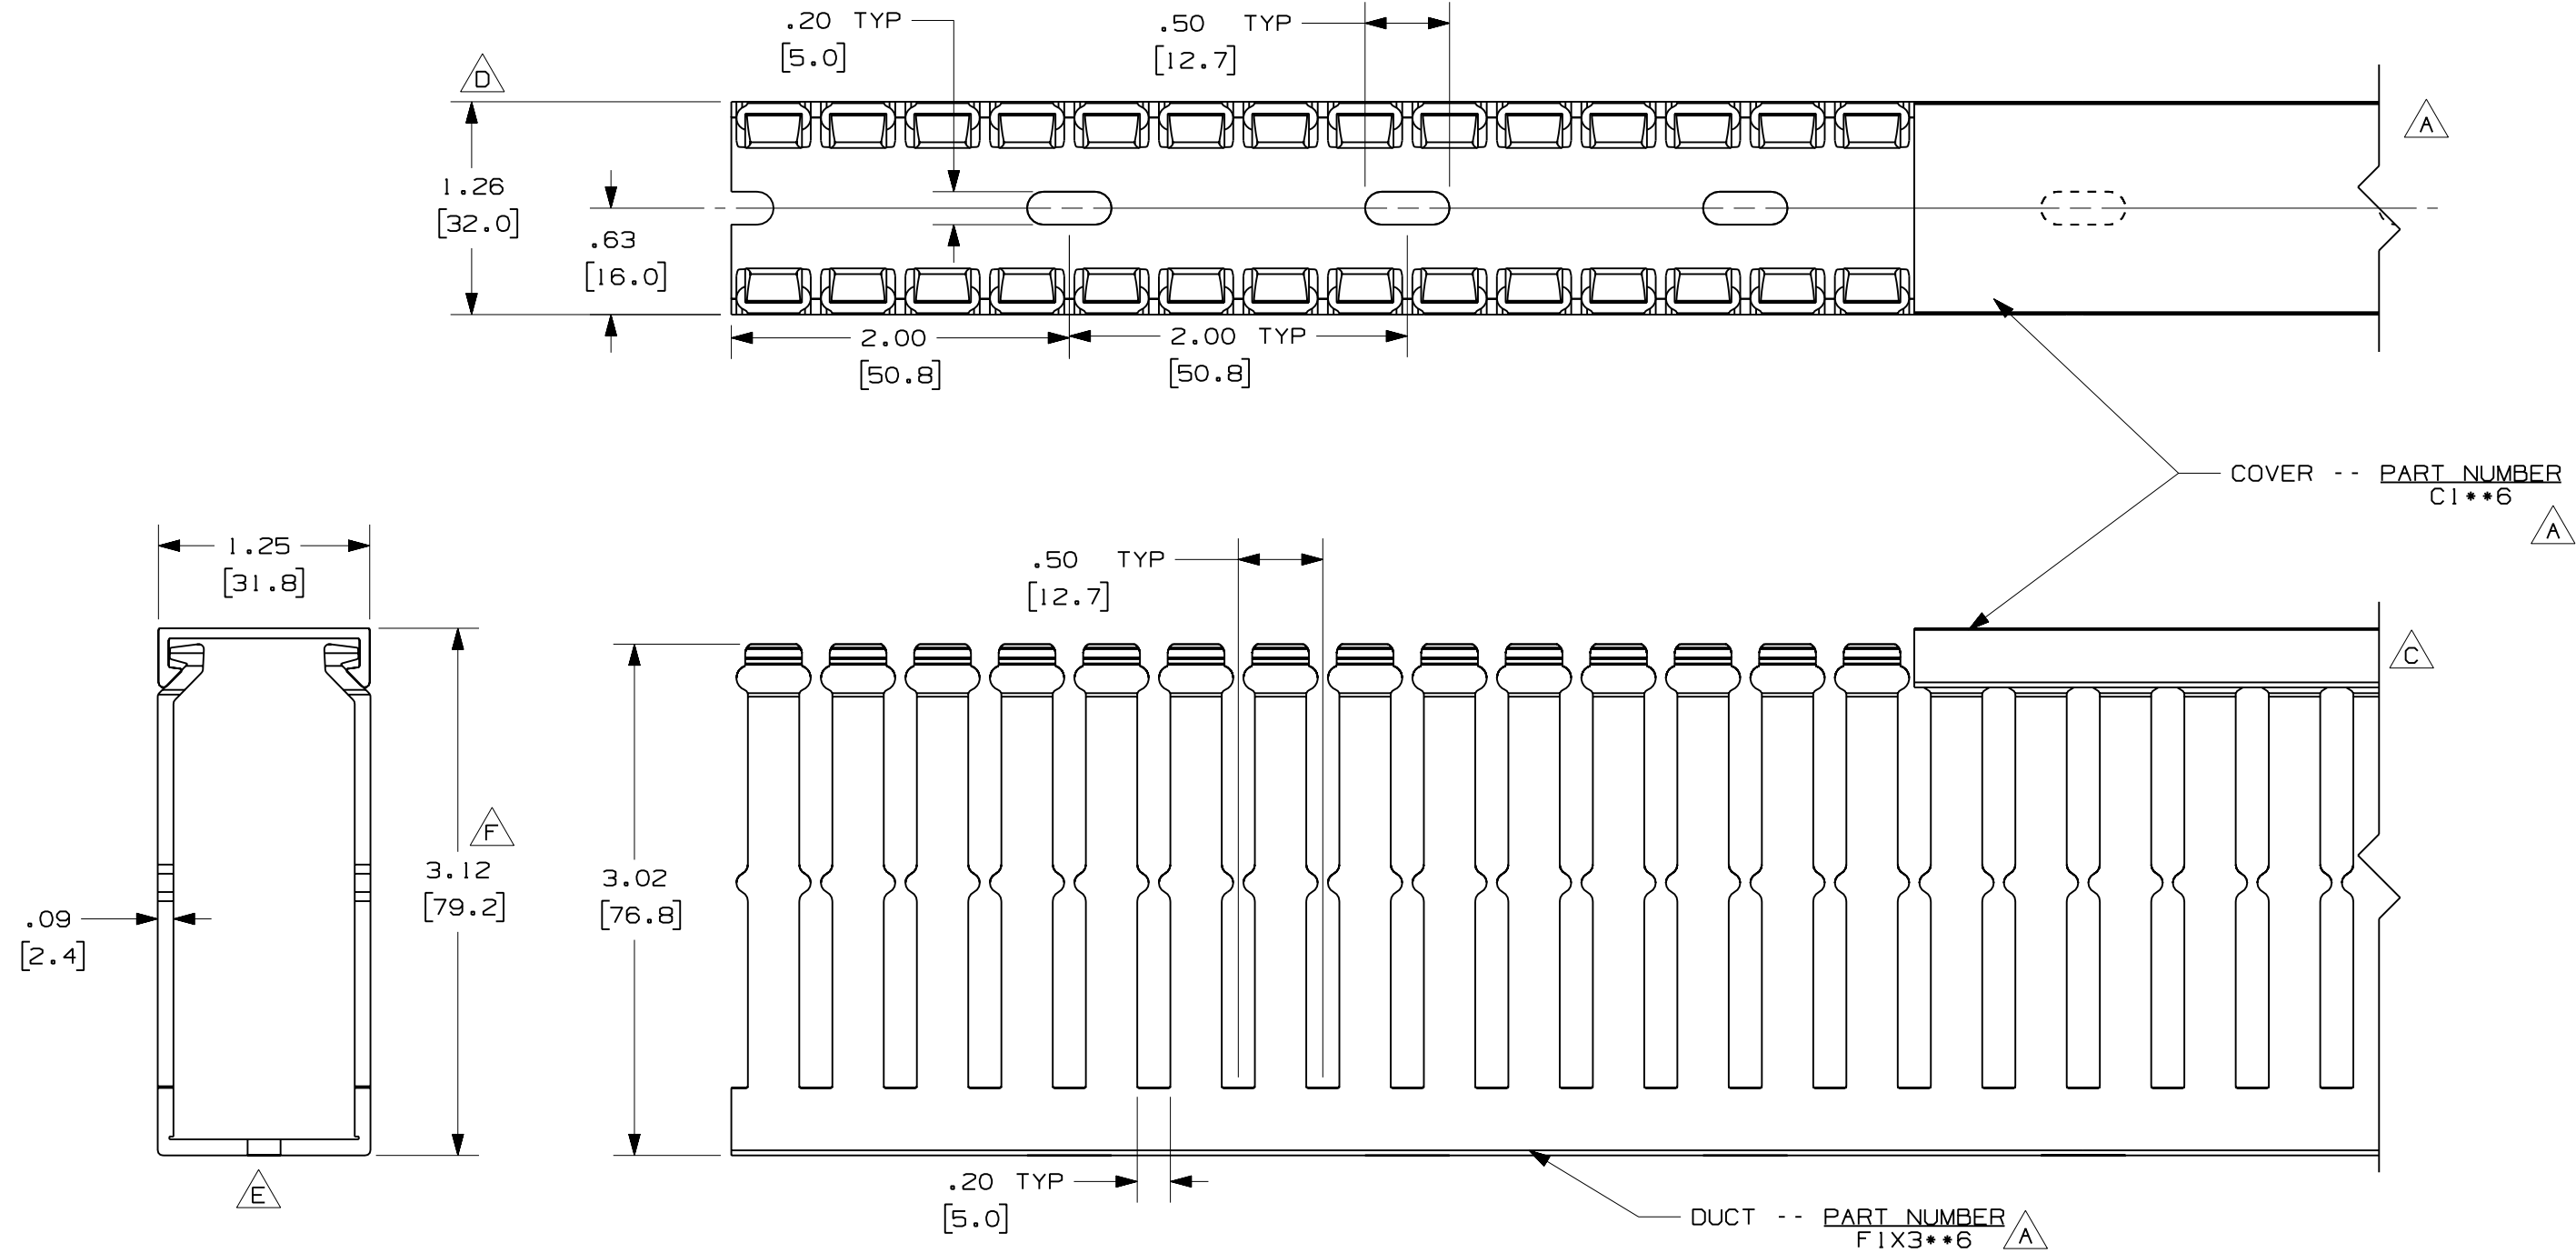

A **G**

NOTE.

1. ALL DIMENSIONS ARE REFERENCE ONLY.
2. DIMENSIONS IN PARENTHESES ARE METRIC.
3. THE ** DENOTE COLOR.
4. DUCT AND COVER ARE AVAILABLE IN 6 FT [1828.8] LENGTH

REV	DATE	BY	CHK	DESCRIPTION
2	7/23/07	JCST	MKBE	G. ADDED LENGTH NOTE F. CORRECTED DIMENSION
1	6/18/04	JCST	MKBE	E. REMOVED DIMENSION D. ADDED DIMENSION
R	6/18/03	JCST	JGG	B. CHANGED DRAWING SIZE C. CHANGED VIEW A. ADDED TOP VIEW, LABELS, AND NOTE
				DRAWING RELEASED

CAD FILENAME/LAYERS		DI1000CA_DC/03C	
PANDUIT CORP. TINLEY PARK, ILLINOIS			
WIRING DUCT - TYPE F WITH COVER 1 X 3 MARKETING DRAWING			
DRAWN BY	JCST	MAT'L:	PVC
DATE	6/18/03	SCALE	FULL
CHECKED BY	JGG	DRAWING NO.	36897-763
		DWG SIZE	B