




G1X2WH6-A

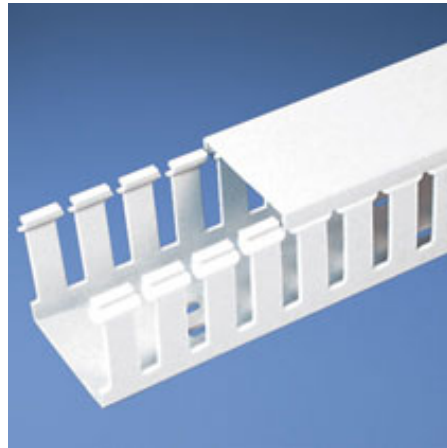

- Choose from 36 sizes of *PANDUIT*® Type G Wiring Duct from 0.5 "x 0.5" up to 6" x 4" in popular colors. Used for general purpose control panel wiring and to route and protect wiring in communication closets. The non-slip cover conceals all wiring and is easy to install. The duct and cover form a flush sidewall providing increased capacity and improved aesthetics.

• Specifications

- Made of lead-free PVC
- UL Recognized continuous use temperature: 122 °F (50°C)
- UL94 Flammability Rating of V-0
- Conforms with NFPA 79-2002 section 14.3.1 requirement for flame retardant material
- Provided with mounting holes


• Features and Benefits

- Wide finger/slot design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes
- *PANDUIT*® exclusive rounded edges protects hands and wiring/cabling from abrasion
- Non-slip cover stays in place during shipment, vibration and when in vertical orientation, eliminating rework
- Flush cover design holds 10-12% more wires than traditional duct designs
- Double scoreline allows quick modification for larger cabling bundles saving installation time leading to a lower installed cost
- Specially formulated lead-free material eliminates health concerns associated with PVC that contains lead
- Restricted slot design retains wire in slot for fast, easy wire installation or removal
- Base and cover sold separately.

▪ Part Number	G1X2WH6-A
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Wide finger, slotted wiring duct.
▪ Material	Lead-Free PVC
▪ Color	White
▪ CSA Certified	Yes
▪ UL Recognized (File No. E147128)	Yes
▪ Length (ft.)	6
▪ Adhesive Mounting Tape	Yes
▪ CE Marking	Yes
▪ Duct Size W x H (In.)	1.26 x 2.12
▪ Duct Size W x H (mm)	32.0 x 53.8
▪ Finger Style	Wide Finger (General Purpose)
▪ Finger Width (In.)	0.80

■ Finger Width (mm)	20.3
■ Flammability Rating	UL94V-0
■ Material Type	General Purpose PVC
■ Max. Continuous Use Temperature	General Purpose (<50°C/122°F)
■ Mounting Hole Spacing (In.)	On Centerline
■ Mounting Hole Spacing (mm)	On Centerline
■ Mounting Holes	Yes
■ Mounting Method	Pressure Sensitive Adhesive Tape
■ Nominal Duct Size WXH inches (mm)	1.00 x 2.00 (25 x 50)
■ Nominal Duct Size WXH mm (inches)	25 x 50 (1.00 x 2.00)
■ Pricing Description	Slotted Duct, PVC, 1"X2"X6', ADH, WHT
■ Slot Width (In.)	0.31
■ Slot Width (mm)	7.9
■ Thickness (In.)	0.08
■ Thickness (mm)	2.0
■ Cover Part Number	C1WH6
■ Min. Order UOM	FT
■ Min. Order Qty.	6
■ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

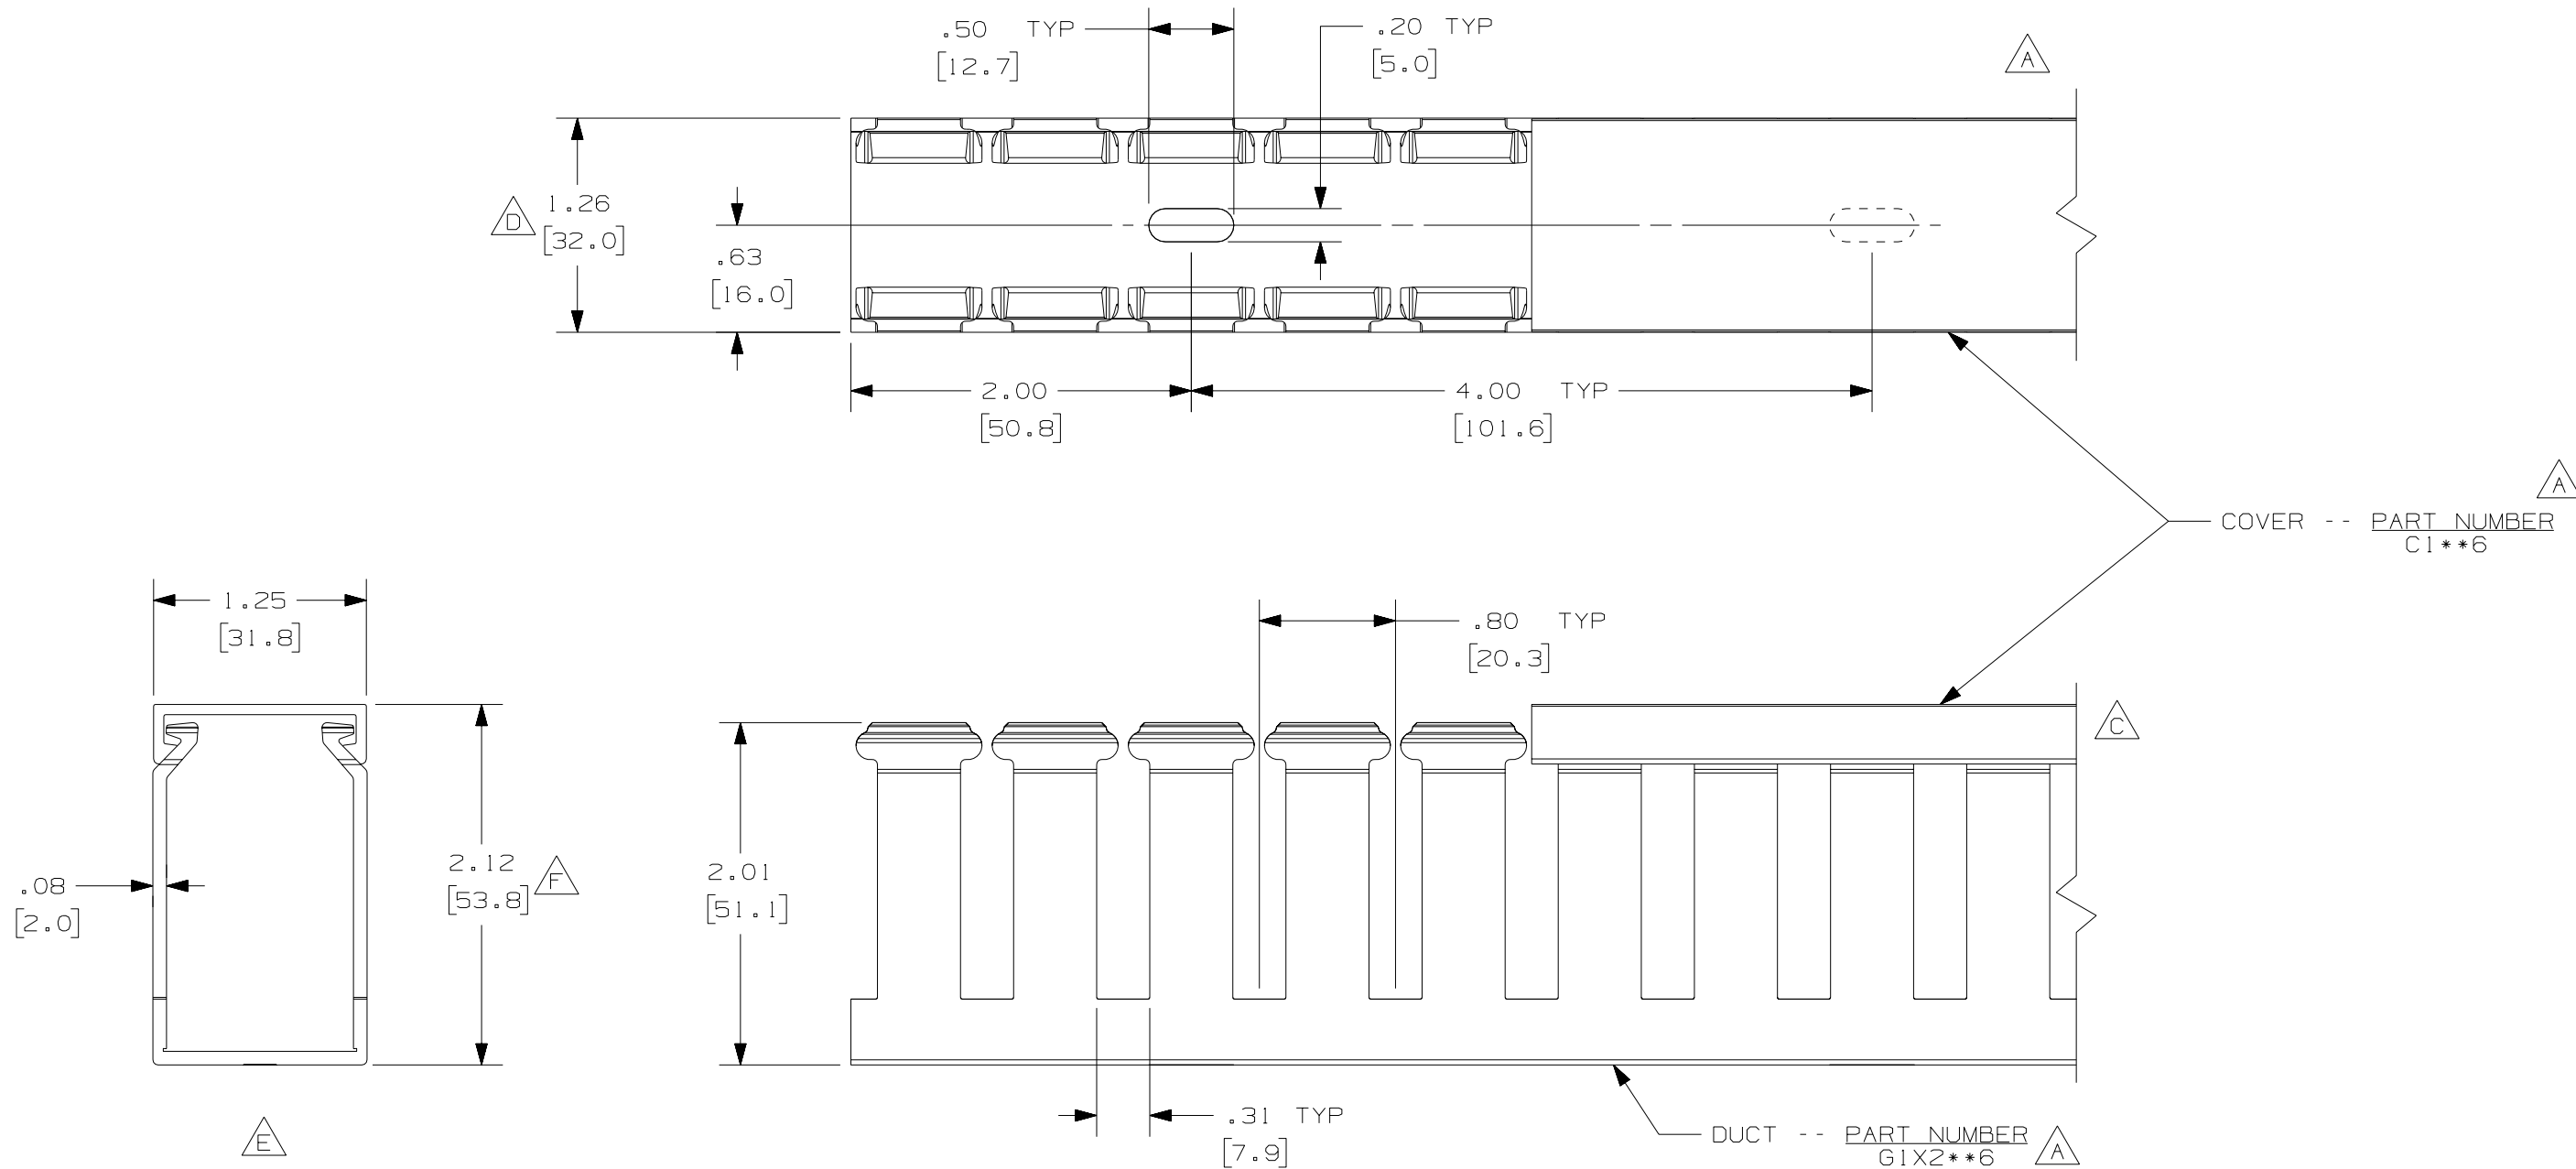

A
G NOTE.

1. ALL DIMENSIONS ARE REFERENCE ONLY.
2. DIMENSIONS IN PARENTHESES ARE METRIC.
3. THE ** DENOTE COLOR.
4. DUCT AND COVER ARE AVAILABLE IN 6 FT [1828.8] LENGTHS.

REV	DATE	BY	CHK	DESCRIPTION
2	7/6/07	JCST	MKBE	G. ADDED LENGTH NOTE F. CORRECTED DIMENSION
1	4/29/04	JCST	MKBE	E. REMOVED DIMENSION D. ADDED DIMENSION
R	3/18/02	JCST	JGG	B. CHANGED DRAWING SIZE C. CHANGED VIEW A. ADDED TOP VIEW, LABELS, AND NOTE
				DRAWING RELEASED

CAD FILENAME/LAYERS		D11000QH_DC/01A	
PANDUIT CORP. TINLEY PARK, ILLINOIS			
WIRING DUCT - TYPE G WITH COVER 1 x 2 MARKETING DRAWING			
DRAWN BY JCST	MAT'L: PVC	SCALE FULL	DWG B
DATE 3/18/02	CHECKED BY JGG	DRAWING NO. 36897-678	SIZE B