G2X3WH6





• Choose from 36 sizes of *PANDUIT®* Type G Wiring Duct from 0.5 "x 0.5" up to 6" x 4" in popular colors. Used for general purpose control panel wiring and to route and protect wiring in communication closets. The non-slip cover conceals all wiring and is easy to install. The duct and cover form a flush sidewall providing increased capacity and improved aesthetics.

Specifications


- Made of lead-free PVC
- UL Recognized continuous use temperature: 122 °F (50°C)
- UL94 Flammability Rating of V-0
- Conforms with NFPA 79-2002 section 14.3.1 requirement for flame retardant material
- Provided with mounting holes

. Features and Benefits

- Wide finger/slot design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes
- PANDUIT® exclusive rounded edges protects hands and wiring/cabling from abrasion
- Non-slip cover stays in place during shipment, vibration and when in vertical orientation, eliminating rework
- Flush cover design holds 10-12% more wires than traditional duct designs
- Double scoreline allows quick modification for larger cabling bundles saving installation time leading to a lower installed cost
- Specially formulated lead-free material eliminates health concerns associated with PVC that contains lead
- Restricted slot design retains wire in slot for fast, easy wire installation or removal
- Base and cover sold separately.

■ Part Number	G2X3WH6
■ RoHS Compliancy Status	Compliant
■ Part Description	Wide finger, slotted wiring duct.
■ Material	Lead-Free PVC
≖ Color	White
■ CSA Certified	Yes
■ UL Recognized (File No. E147128) Yes
■ Length (ft.)	6
■ CE Marking	Yes
■ Duct Size W x H (In.)	2.25 x 3.12
■ Duct Size W x H (mm)	57.2 x 79.2
■ Mounting Method	Standard Mounting Holes
■ Pricing Description	Slotted Duct, PVC,2"X3"X6',WHT
■ Slot Width (In.)	0.31

■ Slot Width (mm)	7.9
■ Cover Part Number	C2WH6
■ Min. Order UOM	FT
Min. Order Qty.	6
■ BOM Qty. (# of Pkgs.)	

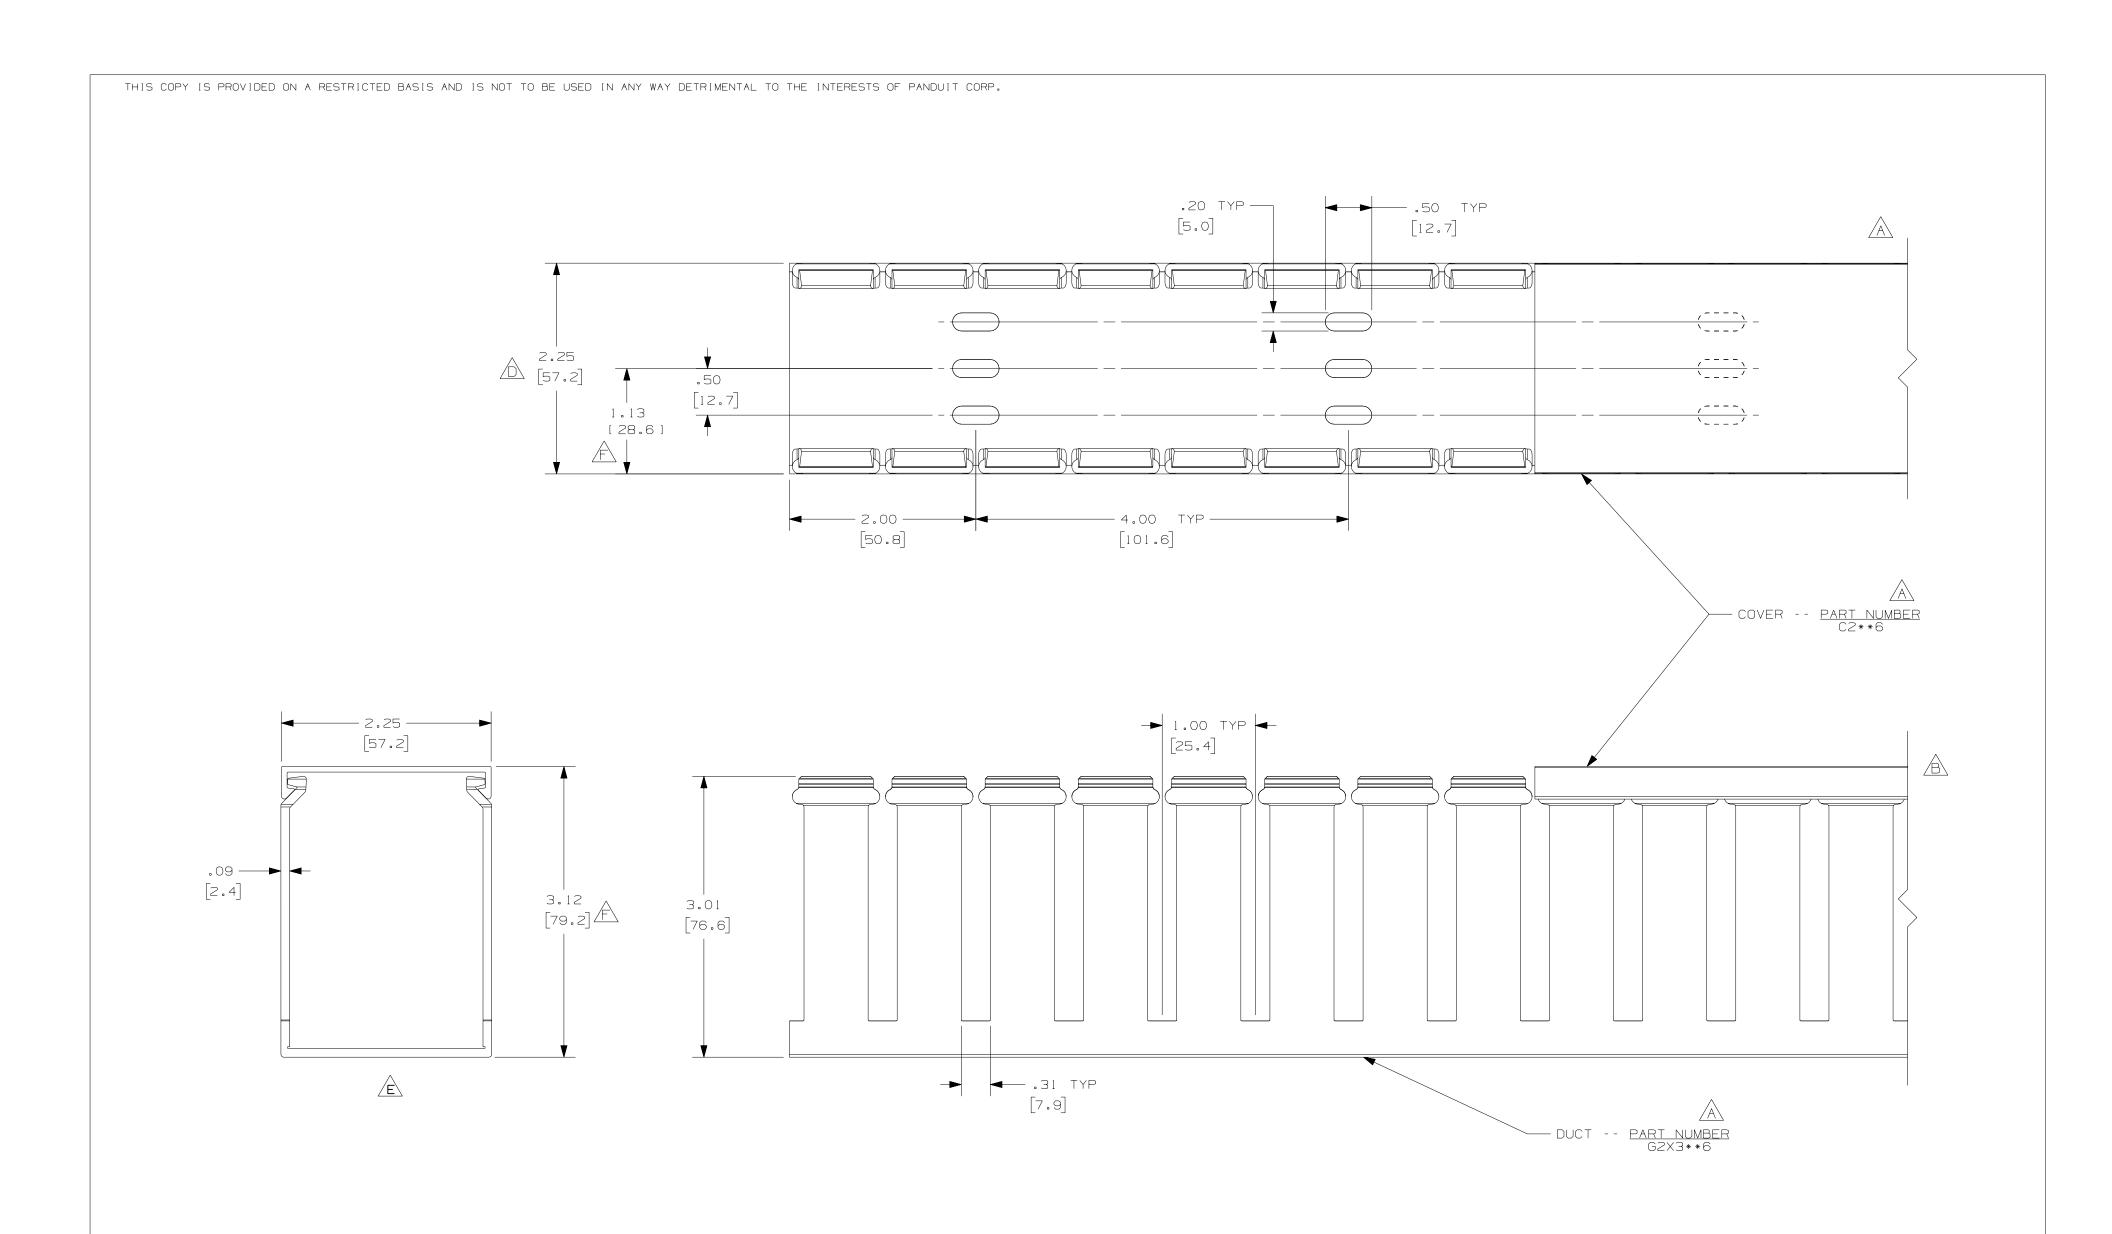

A G

NOTES:

- 1. ALL DIMENSIONS ARE REFERENCE ONLY.
- 2. DIMENSIONS IN PARENTHESIS ARE METRIC.
- 3. THE * * DENOTE COLOR.
- 4. DUCT AND COVER ARE AVAILABLE IN 6 FT [1828.8] LENGTHS.

					CAD FILENAME/LAYERS D11000QS_DC_00C			
				G. ADDED LENGTH NOTE F. CORRECTED DIMENSION	PAN	PANDUIT CORP. TINLEY PARK, ILLINOIS		
2	7/6/07	JCST	MKBE	E. DELETED DIMENSION D. ADDED DIMENSION	WIRING DUCT - TYPE G DUCT WITH COVER 2 X 3			
				C. CHANGED DRAWING SIZE	MARKETING DRAWING			
1	5/6/04	JCST	MKBE	B. CHANGED VIEW A. ADDED TOP VIEW, NOTES, AND LABELS	JCST	MAT'L:	SCALE FULL	
R	3/5/03	JCST	JGG	DRAWING RELEASED	3/5/03	PVC	DRAWING NO. DWG	
REV	DATE	BY	СНК	DESCRIPTION	CHECKED BY JGG		36897 - 706 C size	