## PANDUIT

## G3X3WH6



• Choose from 36 sizes of PANDUIT® Type G Wiring Duct from 0.5 "x 0.5" up to 6" x 4" in popular colors. Used for general purpose control panel wiring and to route and protect wiring in communication closets. The non-slip cover conceals all wiring and is easy to install. The duct and cover form a flush sidewall providing increased capacity and improved aesthetics.

## Specifications


- Made of lead-free PVC
- UL Recognized continuous use temperature: 122 °F (50°C)
- UL94 Flammability Rating of V-0
- Conforms with NFPA 79-2002 section 14.3.1 requirement for flame retardant material
- Provided with mounting holes

## . Features and Benefits

- Wide finger/slot design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes
- PANDUIT® exclusive rounded edges protects hands and wiring/cabling from abrasion
- Non-slip cover stays in place during shipment, vibration and when in vertical orientation, eliminating rework
- Flush cover design holds 10-12% more wires than traditional duct designs
- Double scoreline allows quick modification for larger cabling bundles saving installation time leading to a lower installed cost
- Specially formulated lead-free material eliminates health concerns associated with PVC that contains lead
- Restricted slot design retains wire in slot for fast, easy wire installation or removal
- Base and cover sold separately.

■ Part Number	G3X3WH6
■ RoHS Compliancy Status	Compliant
■ Part Description	Wide finger, slotted wiring duct.
■ Material	Lead-Free PVC
■ Color	White
■ CSA Certified	Yes
■ UL Recognized (File No. E147128)	Yes
■ Length (ft.)	6
<ul><li>CE Marking</li></ul>	Yes
■ Duct Size W x H (In.)	3.25 x 3.12
■ Duct Size W x H (mm)	82.6 x 79.2
■ Mounting Method	Standard Mounting Holes
■ Pricing Description	Slotted Duct, PVC,3"X3"X6',WHT
■ Slot Width (In.)	0.31

■ Slot Width (mm)	7.9
■ Cover Part Number	C3WH6
■ Min. Order UOM	FT
<ul><li>Min. Order Qty.</li></ul>	6
■ BOM Qty. (# of Pkgs.)	

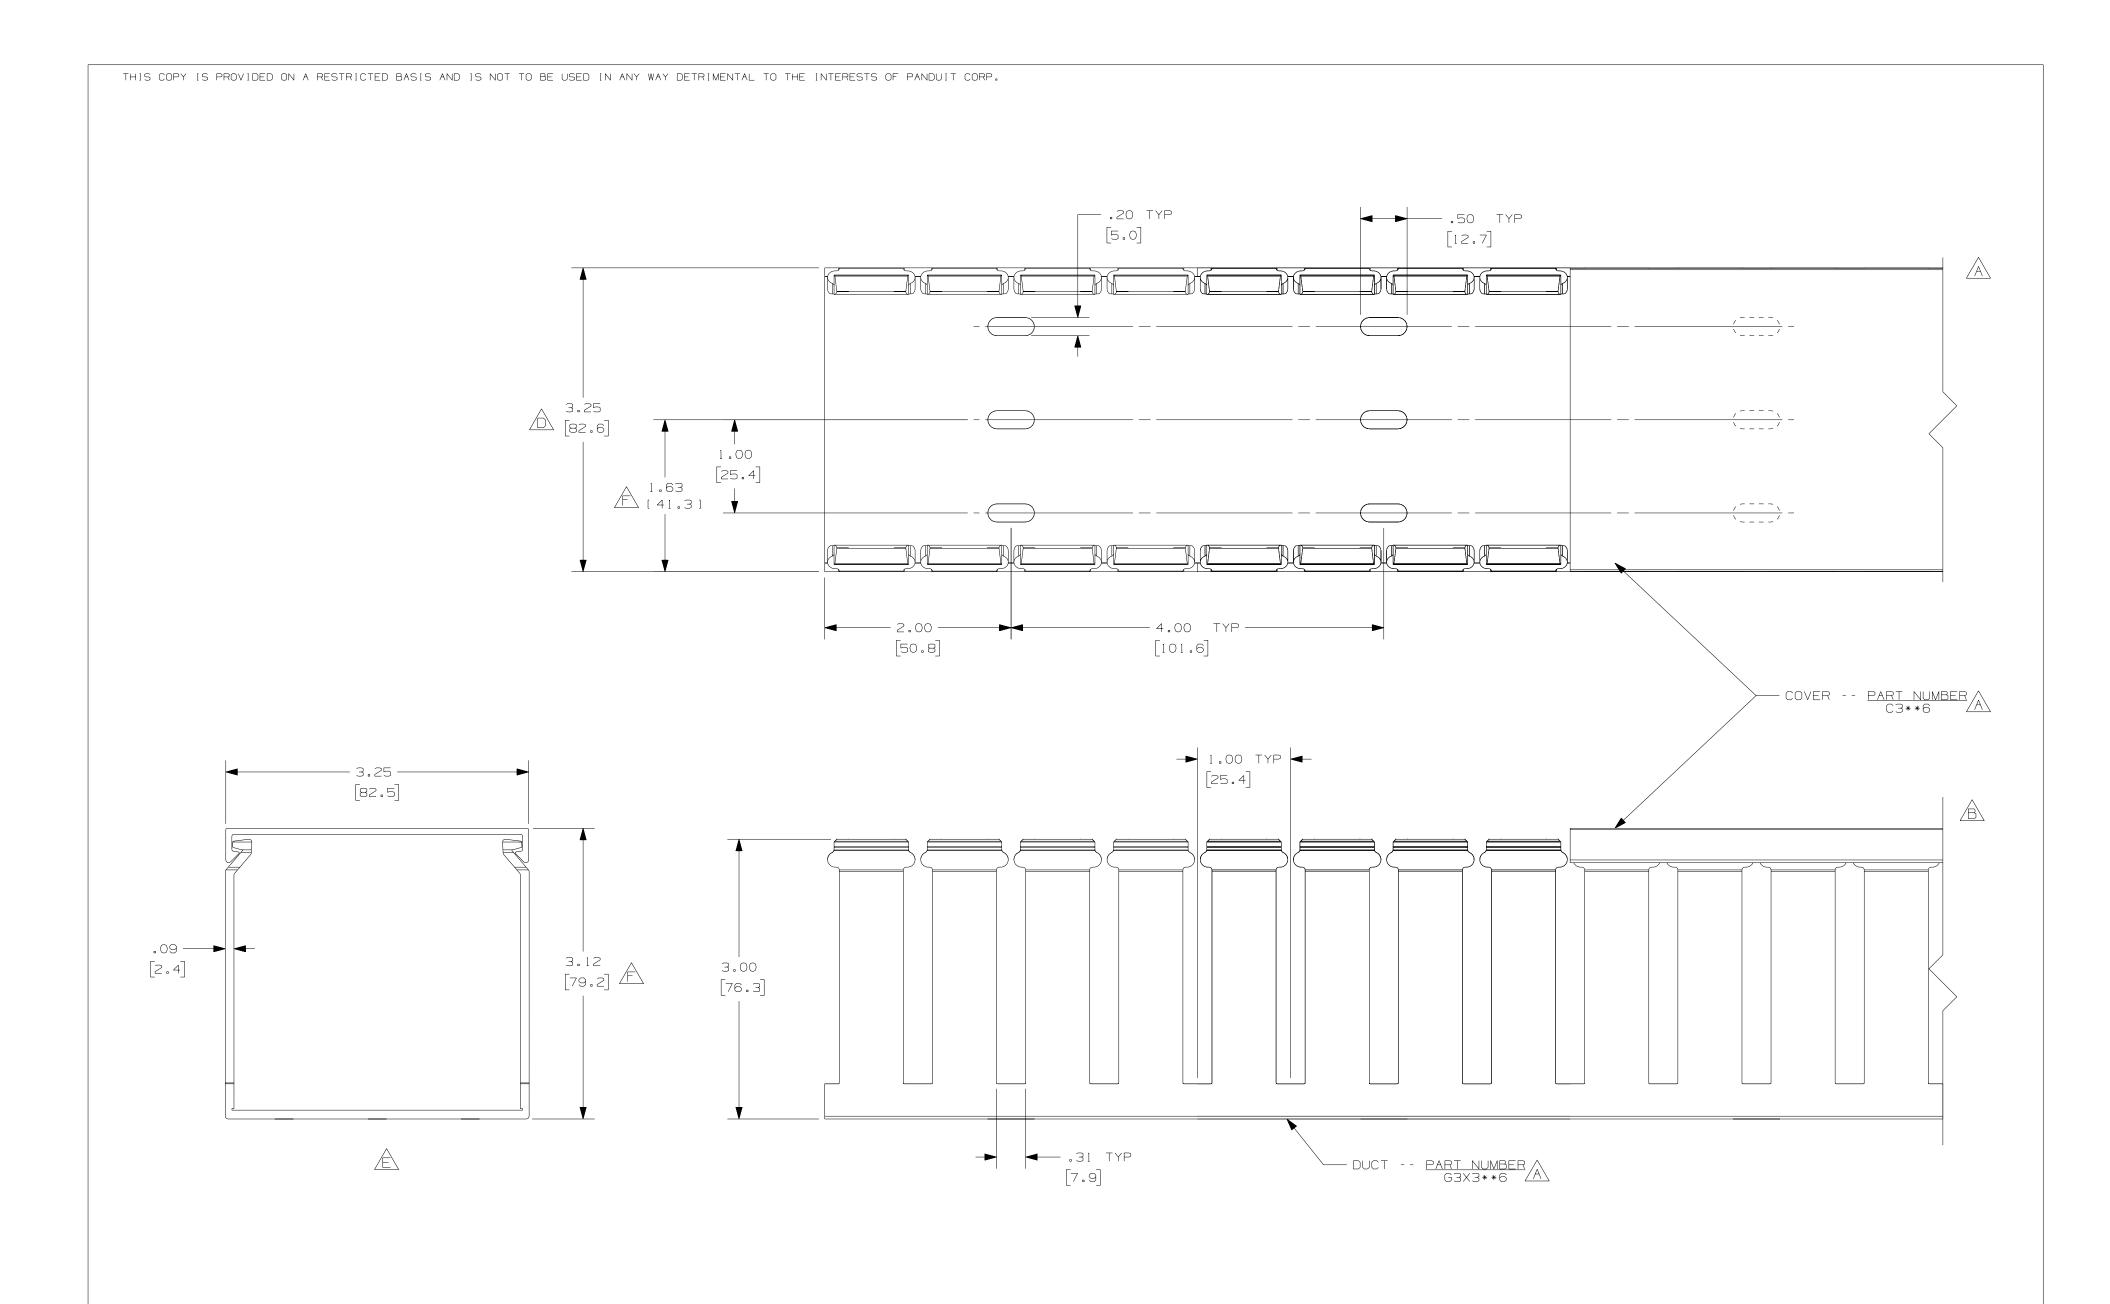



- 1. ALL DIMENSIONS ARE REFERENCE ONLY.
- 2. DIMENSIONS IN PARENTHESIS ARE METRIC.
- 3. THE \* \* DENOTE COLOR.
- 4. DUCT AND COVER ARE AVAILABLE IN 6 FT [1828.8] LENGTHS.

						CAD FILENAME/LAYER	DIIOOOQY_DC_OOC			
					G. ADDED LENGTH NOTE F. CORRECTED DIMENSION	PAN	PANDUIT CORP. TINLEY PARK, ILLINOIS			
2		7-6-07	JCST	MKBE	E. DELETED DIMENSION D. ADDED DIMENSION	WIRING	WIRING DUCT - TYPE G DUCT WITH COVER			
	-   -				C. CHANGED DRAWING SIZE		- 3x3 marketing drawing			
1		5-20-04	JCST	MKBE	B. CHANGED VIEW A. ADDED TOP VIEW, NOTES, AND LABELS	JCST	MAT'L:	SCALE FULL		
R	!	3-5-03	JCST	JGG	DRAWING RELEASED	3-5-03	PVC	DRAWING NO.	DWG	
RE	V	DATE	ВҮ	CHK	DESCRIPTION	CHECKED BY JGG		36897-711	SIZE	