



HLS-15R0




- Strip Ties (HLS) - Rolls performed in convenient 6", 12" and 18" strips
- 15' & 75' Rolls (HLM/HLS-15 & 75) - Can be cut to desired length, eliminating waste
- Adjustable, releasable, and reusable hundreds of times – ideal for applications requiring frequent moves, adds, or changes
- Hook and loop material maintains network data integrity by protecting against over-tensioning of high performance copper and fiber cables
- Easy to use and operator safe with no sharp edges
- Complementary mounts available

Note: Minimum 2" overlap required to achieve loop tensile rating

Part Number	HLS-15R0
RoHS Compliancy Status	Compliant
Part Description	Hook & Loop Cable Tie, 15' roll, Standard cross section
Product Type	Cable Ties
Material	Nylon Loop, Polyethylene Hook
Color	Black
CSA Certified	No
UL Listed (File #E56854)	No
UL Recognized (File #E56854)	No
Length (ft.)	15.0
Length (In.)	180.0
Length (m)	4.6
Length (mm)	4572
Width (In.)	.750
Width (mm)	19.1
CE Compliant	Yes
Cross Section	Standard
Locking Style	Hook & Loop
Max. Bundle Diameter (In.)	Various
Max. Bundle Diameter (mm)	Various
Min. Bundle Diameter (In.)	.25
Min. Bundle Diameter (mm)	6
Min. Loop Tensile Strength (Lbs.)	50
Min. Loop Tensile Strength (N)	222
Pricing Description	Hook & Loop Roll, 15'L (4.6m), .33"W (8.4mm), Black
Temperature Range	0°F to 220°F

▪ Thickness (In.)	.10
▪ Thickness (mm)	2.5
▪ Min. Order UOM	RL
▪ Min. Order Qty.	1
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

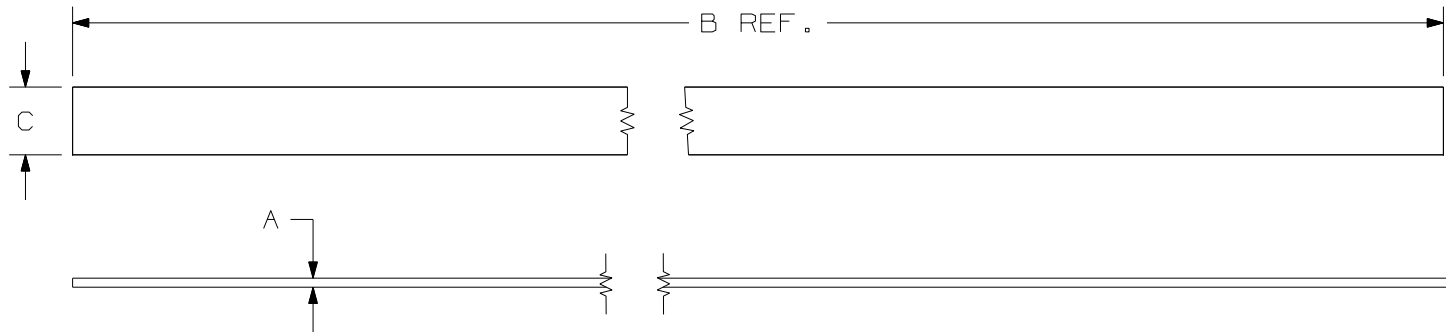

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	MIN. LOOP* TENSILE lbs. (N)	ROLL DESCRIPTION	APPROXIMATE WEIGHT lbs/10 ROLLS (g)
	MIN. in (mm)	MAX. in (mm)						
HLS1.5S	.25 (6.4)	1.5 (38.1)	.100 (2.5)	6.0 (152)	.750 (19.1)	50 (222)	PERFORATED STRIPS QTY: 10 PIECES/ROLL	.43 (194)
HLS3S	.25 (6.4)	3.2 (81.3)	.100 (2.5)	12.0 (305)	.750 (19.1)	50 (222)		.85 (384)
HLS5S	.25 (6.4)	5.0 (127)	.100 (2.5)	18.0 (457)	.750 (19.1)	50 (222)		1.25 (568)
HLS-15R	.25 (6.4)	VARIOUS	.100 (2.5)	180 (4572)	.750 (19.1)	50 (222)	15 FT CONTINUOUS	1.25 (567)
HLS-75R	.25 (6.4)	VARIOUS	.100 (2.5)	900 (22860)	.750 (19.1)	50 (222)	75 FT	6.32 (2867)

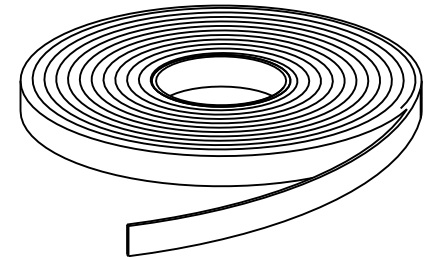


ILLUSTRATION 'A'

NOTES:

- 1) ALL LENGTHS PACKED IN ROLL FORM (SEE ILLUSTRATION 'A')
- * 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.
- 3) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR OPTIONAL COLORS.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS

SS-27184.prt

PANDUIT CORP. TINLEY PARK, ILLINOIS

TAK-TY HOOK & LOOP CABLE TIES
HLS SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .035
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
KET

MAT'L:

SCALE NONE

DATE
12/30/98

POLYETHYLENE HOOK/
NYLON LOOP

DRAWING NO.

SS-27184

DWG
A
SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
4	6/5/06	FAB		ADDED PART WEIGHTS TO DRAWING	27184	4		