





## MACC62-A-C

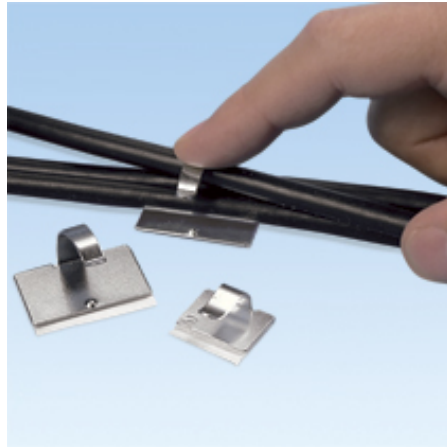

- Metal adhesive backed cord clip can be opened and closed without damage to the clip to remove or add wires quickly and easily.




|                              |   |
|------------------------------|---|
| ■ Part Number                | MACC62-A-C                                  |
| ■ RoHS Compliancy Status     | Compliant                                   |
| ■ Part Description           | Metal Adhesive Backed Cord Clip             |
| ■ Product Type               | Mounting Device                             |
| ■ Material                   | Zinc Plated Steel                           |
| ■ Length (In.)               | 1.18  |
| ■ Length (mm)                | 30.0  |
| ■ Width (In.)                | .78   |
| ■ Width (mm)                 | 19.7  |
| ■ Adhesive Type              | Rubber                                      |
| ■ Environment                | Indoors                                     |
| ■ Max. Bundle Diameter (In.) | .62   |
| ■ Max. Bundle Diameter (mm)  | 15.7  |
| ■ Mounting Method            | Adhesive Backed                             |
| ■ Pricing Description        | Cord Clip, Metal Adh., .62" (15.8mm) Bundle |
| ■ Min. Order UOM             | PC  |
| ■ Min. Order Qty.            | 100   |
| ■ BOM Qty. (# of Pkgs.)      |   |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

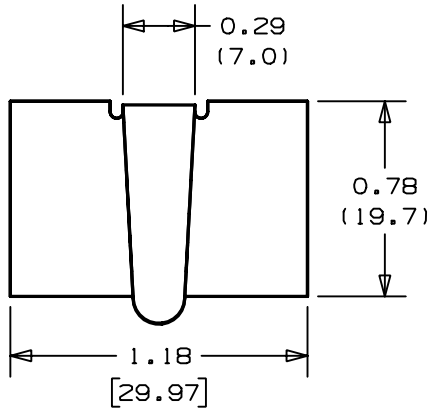

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

| PANDUIT *<br>PART NO. | MAX. BUNDLE<br>DIAMETER<br>inches (mm) | WEIGHT<br>lb(g)/100 pcs. |
|-----------------------|--|--------------------------|
| MACC62-A              | 0.62 (16)                              | 0.90 (408)               |

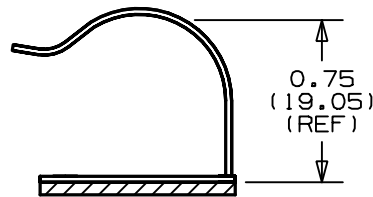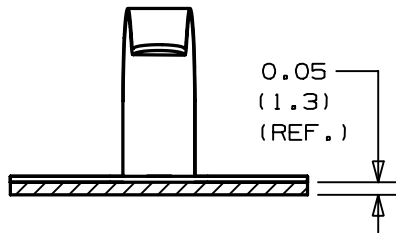

PRESSURE SENSITIVE FOAM TAPE-  
0.05 (1.3) THICK WITH PROTECTIVE LINER.

NOTES:

- \* 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATIONS FOR PACKAGE SIZE.
- 2) TO APPLY MOUNT: a) REMOVE PROTECTIVE LINER, b) PLACE IN DESIRED LOCATION, c) APPLY PRESSURE TO MOUNT.
- 3) MATERIAL:  
G-90 PRE-GALVANIZED COMMERCIAL GRADE LOW CARBON STEEL. PER ASTM A 653 STEEL SHEET, ZINC COATED (GALVANIZED) BY THE HOT DIP PROCESS.

(DIMENSIONS IN PARENTHESES ARE IN METRIC.)

CAD FILENAME/LAYER

G002391R\_PB\_MACC62\_02

**PANDUIT**

CORP.

TINLEY PARK, ILLINOIS

MACC62-A  
METAL ADHESIVE CORD CLIP

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±0.1(2.5) (.XXX) ±0.020(.5)  
(.XX) ±0.05(1.3) ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY  
LGG

MAT'L:

SCALE  
NOT TO SCALE

DATE  
7/30/01

SEE NOTE 3

DRAWING NO.

G002391R

DWG

A  
SIZE

| REV | DATE    | BY  | CHK | DESCRIPTION                                 | ECN      | R | CUST | SUP |
|-----|---------|-----|-----|---|----------|---|------|-----|
| 2   | 2/19/03 | JAD |     | UPDATED MATERIAL DESIGNATION,<br>ADD NOTE 3 | G002391R | 2 |      |     |
| 1   | 1-26-01 | LGG |     | ADDED DIMS AND REF DIMS                     | G002391R | 1 |      |     |
| R   | 7-30-01 | LGG |     | DRAWING RELEASED REPLACED SS-22006          | G002391R | R |      |     |