

## MRS1.5LH-L4





- • 360° radial seal eliminates gaps under the head of the tie to provide a completely sealed installation
  - Self-locking cable tie design locks into place at any length along the tie body, unlike fixed diameter band clamps
  - Available in AISI 304 stainless steel for general-purpose applications
  - Available in AISI 316 stainless steel for the most corrosive environments

<ul> <li>Part Number</li> </ul>	MRS1.5LH-L4
<ul> <li>RoHS Compliancy Status</li> </ul>	Compliant
■ Part Description	360° radial seal retained tension, stainless steel cable tie, light-heavy, 1.5" (38mm) max. bundle diameter.
■ Product Type	Cable Ties
<ul><li>Material</li></ul>	Stainless Steel Type 304
■ Length (In.)	9.7
■ Length (mm)	246
<ul><li>Width (In.)</li></ul>	.25
■ Width (mm)	6.4
<ul><li>Cross Section</li></ul>	Light-Heavy
<ul><li>Max. Bundle Diameter (In.)</li></ul>	1.5
■ Max. Bundle Diameter (mm)	38
<ul><li>Min. Bundle Diameter (In.)</li></ul>	1.00
■ Min. Bundle Diameter (mm)	25.4
<ul><li>Min. Loop Tensile Strength (Lbs.</li></ul>	) 225
<ul><li>Min. Loop Tensile Strength (N)</li></ul>	1000
■ Pricing Description	Radial Seal Tie, 304 SS, Light Heavy, 9.7" (246mm), .010" (.25mm) thk
■ Thickness (In.)	.010
■ Thickness (mm)	.25
■ Tool	MTRTLS
<ul><li>Min. Order UOM</li></ul>	PC
<ul><li>Min. Order Qty.</li></ul>	50
■ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDE	D ON A RESTRICTED BASIS	AND IS NOT TO BE USED	IN ANY WAY DETRIMENTAL	TO THE INTERESTS OF PANDUIT CORP.
----------------------	-------------------------	-----------------------	------------------------	-----------------------------------

PANDUIT PART NO.	PACKAGE QTY.	MAX.BUNDLE DIAMETER	LENGTH "L" ±.3" [7]
MRS1.5LH-L4	50	1.5" [38]	9.7" [246]
MRS2LH-L4	50	2" [5]]	11.3" [287]
MRS4LH-L4	50	4" [ 102 ]	17.6" [447]
MRS6LH-L4	50	6" [ 152 ]	23.8" [604]

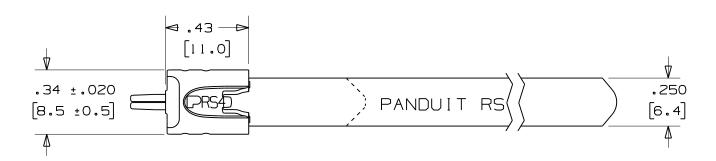

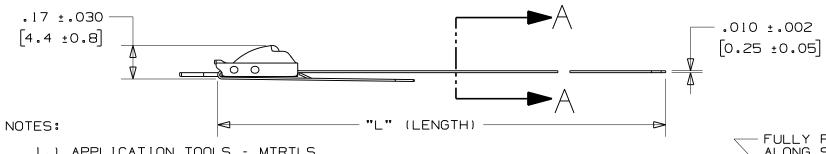

1.) APPLICATION TOOLS - MTRTLS


2.) MINIMUM LOOP TENSILE STRENGTH - 225 LBS. (1000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.

3.) [ ] DENOTES DIMENSION IN MILLIMETERS

4.) TOLERANCES:

 $.XXX = \pm .010[.25]$  $.XX = \pm .02[.5]$  $.X = \pm .03[.8]$ ANGLES =  $\pm 2^{\circ}$ 

5.) MATERIAL: 304 STAINLESS STEEL



SCALE 6:1

ТМ

N41261BS\_DC/02A

						כול נו		1005	7	
02A	7/07	JAME	EJD	TEAMCENTER DWG, CAD FILE NAME UPDATED				االا		TINLEY PARK, ILLINOIS
01	6/07	JAME	EJD	APPLICATION TOOLS WERE MTRTI & PTRTI	METAL TIE - LIGHT-HEAVY SERIES					
00	6/07	JAME	EJD	DRAWING RELEASED	RETAINED TENSION - 360° RADIAL SEAL 304 STAINLESS STEEL					
REV	DATE	ВҮ	СНК	DESCRIPTION	JAMB	CHK,D	EJD	SCALE	2:1	DRAWING NO. N41261BS