

PLT4S-C76




- Ideal for applications requiring resistance to environmental stresses such as chemical attack, gamma radiation, ultraviolet radiation and extreme temperatures
- Ideal for use in nuclear power facilities and chemical processing plants
- Low smoke density and excellent flammability rating of UL 94V-0
- Distinctive aqua blue color
- TEFZEL cable tie mounts also available
- For indoor or outdoor use

TEFZEL is a registered trademark of E. I. du Pont de Nemours and Company.

■ Part Number	PLT4S-C76
■ RoHS Compliancy Status	Compliant
■ Part Description	Cable Tie, 14.6", Standard cross section
■ Product Type	Cable Ties
■ Material	Tefzel
■ Color	Aqua
■ CSA Certified	Yes
■ UL Listed (File #E56854)	No
■ UL Recognized (File #E56854)	Yes
■ Length (In.)	14.6
■ Length (mm)	371
■ Width (In.)	.190
■ Width (mm)	4.8
■ CE Compliant	Yes
■ Cross Section	Standard
■ Head Height (In.)	.240
■ Head Height (mm)	6.1
■ Head Width (In.)	.320
■ Head Width (mm)	8.1
■ Locking Style	Locking
■ Material Flammability Rating	UL 94V-0
■ Max. Bundle Diameter (In.)	4.00
■ Max. Bundle Diameter (mm)	102
■ Max. Continuous Use Temperature	338°F (170°C)
■ Min. Loop Tensile Strength (Lbs.)	50
■ Min. Loop Tensile Strength (N)	222

▪ Pricing Description	Cable Tie, 14.6"L (371mm), Standard, Tefzel, Aqua
▪ Thickness (In.)	.059
▪ Thickness (mm)	1.5
▪ Tool	GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2
▪ Min. Order UOM	PC
▪ Min. Order Qty.	100
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

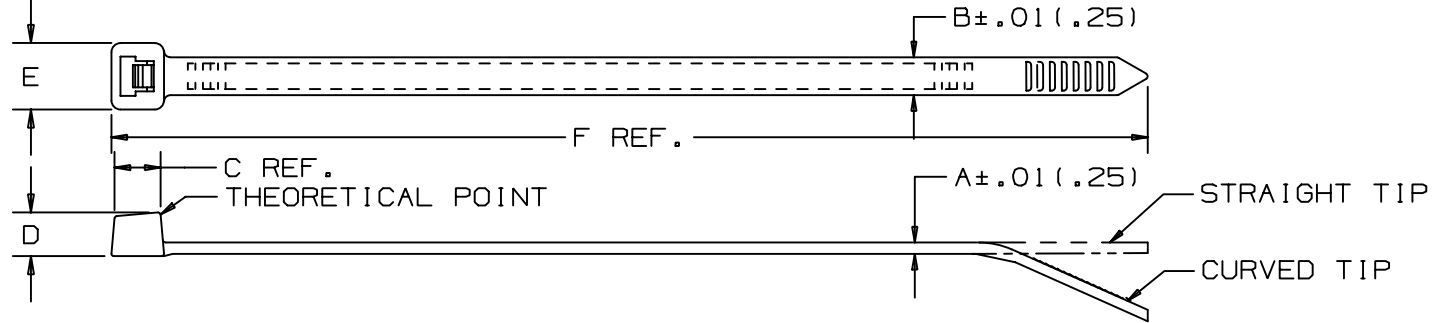

PANDUIT PART NO. *	BUNDLE DIA.		A	B	C	D	E	F	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT4S	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	14.5 (368)	50 (222)	STANDARD	CURVED	.56 (254)
PLT4.5S	.06 (1.5)	4.50 (114)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	15.5 (394)	50 (222)	STANDARD	CURVED	.57 (257)
PLT5S	.06 (1.5)	5.00 (127)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	17.5 (445)	50 (222)	STANDARD	CURVED	.65 (293)
PLT6LH	.188 (4.8)	6.00 (152)	.075 (1.9)	.300 (7.6)	.372 (9.4)	.325 (8.3)	.480 (12.2)	21.9 (556)	120 (534)	LIGHT HEAVY	STRAIGHT	1.86 (845)
PLT7LH	.188 (4.8)	7.00 (178)	.075 (1.9)	.300 (7.6)	.372 (9.4)	.325 (8.3)	.480 (12.2)	24.7 (627)	120 (534)	LIGHT HEAVY	STRAIGHT	2.09 (950)
PLT8LH	.188 (4.8)	8.00 (203)	.075 (1.9)	.300 (7.6)	.372 (9.4)	.325 (8.3)	.480 (12.2)	27.6 (701)	120 (534)	LIGHT HEAVY	STRAIGHT	2.32 (1054)
PLT9LH	.188 (4.8)	9.00 (229)	.075 (1.9)	.300 (7.6)	.372 (9.4)	.325 (8.3)	.480 (12.2)	30.5 (775)	120 (534)	LIGHT HEAVY	STRAIGHT	2.56 (1161)
PLT10LH	.188 (4.8)	10.31 (262)	.075 (1.9)	.300 (7.6)	.372 (9.4)	.325 (8.3)	.480 (12.2)	34.3 (871)	120 (534)	LIGHT HEAVY	STRAIGHT	2.83 (1285)

NOTES:

- 1) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.
- *2) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE & PART COLOR.

SS-5540-00.PRT

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS
 PAN-TY CABLE TIES
 PLT SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
 (.X) ± .0005 (.XXX) ± .001 (.51)
 (.XX) ± .0015 ANGLES ± .001

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
CEW

MAT'L:

SCALE NONE

24	11/4/02	JABO		ADDED DIMENSION 'C' TO CABLE TIE, MISSING ON DRAWING.	5540	24						
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP				

DATE
12-27-84

NYLON 6/6

DRAWING NO.
SS-5540

DWG
A
SIZE

CHK'D
HVP

SHEET 3