SGABM20-A-C






- Low profile design keeps bundle close to mounting surface
 - Small overall size allows use where space is limited
- ‡Cable tie cross section sizes: SGM = Super-Grip™ Miniature, SGI = Super-Grip™ Intermediate, SGS = Super-Grip™ Standard, SGLH = Super-Grip™ Light Heavy, SGH = Super-Grip™ Heavy.

■ Part Number	SGABM20-A-C
■ RoHS Compliancy Status	Compliant
■ Part Description	Super Grip ™4-Way Adhesive Backed Cable Tie Mount
■ Material	Nylon 6.6
■ Color	White
■ Height (In.)	.16
■ Height (mm)	4.0
■ Length (In.)	.75
■ Length (mm)	19.1
■ Width (In.)	.75
■ Width (mm)	9.1
■ Adhesive Type	Rubber
■ Environment	Indoor Use
■ Mounting Method	Rubber
■ Pricing Description	Super Grip Adhesive Mount, Adh., .75" x .75" (19.1mm x 19.1mm), NAT
Used With Cable Ties	SGM, SGI
■ Min. Order UOM	PC
■ Min. Order Qty.	100
■ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NO WARRANTY, EXPRESSED OR IMPLIED IS MADE BY PANDUIT WITH RESPECT TO ADEHSIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND / OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUITS CONTOL.

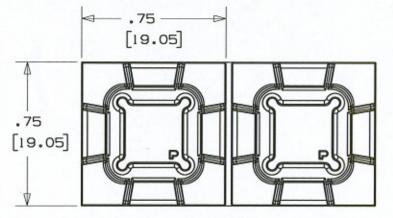


ADHESIVE BACKING:

PANDUIT PART NO. *	REC'M FASTENER	USE WITH THESE CABLE TIE CROSS SECTIONS	WEIGHT bs / 100 (g) / pcs
SGABM20 - A ABM20 PAM075AB - A	RUBBER ADHES I VE	м, I, SG100м, SG1501	0.142
SGABM20-AT ABM20B PAM075AB-AT	ACRYLIC ADHESIVE		

NOTES

- 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
- 2. PRODUCT IS SUPPLIED IN STRIPS OF TWO.
- 3. [A] MOUNT HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 120°F (49°C).

[-AT] MOUNT HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 180 °F (82 °C).

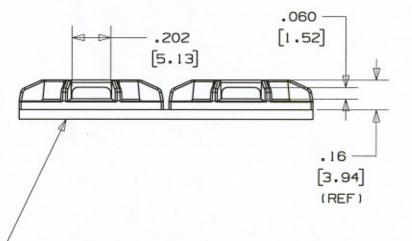



SCALE: FULL

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

G03150FB_PB_SGABM20_00



TINLEY PARK, ILLINOIS

ADHESIVE BACKED MOUNT - SUPER GRIP COMPATIBLE (SGABM20-_-__); (ABM20, 20B): (PAMO75AB-A, -AT)

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±0.05 [1.3] (.XXX) ±0.010 [0.25] (.XX) ±0.02 (0.5) ANGLES ±5*

UNLESS OTHERWISE SPECIFIED. ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DWG

SIZE

DRAWN BY JAD 6/12/06

NYLON 6/6

SCALE ZX

DRAWING NO.

GB3150FB

R	6/12/06	JAD	MY	
REV		BY	CHK	I

GB3150FB INITIAL RELEASE DESCRIPTION ECN - R CUST SUP

•[-A] RUBBER BASED ADHEISVE PRESSURE SENSITIVE

FOAM TAPE 0.04 (1.0) THICK WITH A PROTECTIVE

LINER. MOUNT IS DESIGNED TO SUPPORT 0.28 lbs

FOAM TAPE 0.04 (1.0) THICK WITH A PROTECTIVE

LINER. MOUNT IS DESIGNED TO SUPPORT 0.28 Lbs

(127g) MAX. ON A CLEAN DRY SMOOTH SURFACE.

•I -ATTACRYLIC BASED ADHESIVE PRESSURE SENSITIVE

(127g) MAX. WEIGHT ON A CLEAN DRY SMOOTH SURFACE.