



## SSM2S-D





- Natural Nylon material for indoor use
- Weather Resistant material has greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Used to fasten and identify bundles at the same time
- Unique design allows tie to be used as a wrap-around or flag marker
- Can be marked with *PANDUIT* Marker Pens or custom imprinted with text, symbols or trademarks available using *PANDUIT* Custom Hot Stamping Service

■ Part Number	SSM2S-D
■ RoHS Compliancy Status	Compliant
■ Part Description	Marker Tie, Flag/Wrap, Releasable, 6.7", Standard cross section
■ Product Type	Cable Ties
■ Material	Nylon 6.6
■ Color	Natural
■ CSA Certified	Yes
■ Mil. Std. Part Number	MS3368-1-9B
■ UL Listed (File #E56854)	No
■ UL Recognized (File #E56854)	Yes
■ Length (In.)	6.7
■ Length (mm)	170
■ Width (In.)	.180
■ Width (mm)	4.6
■ CE Compliant	Yes
■ Cross Section	Standard
■ Head Height (In.)	.165
■ Head Height (mm)	4.2
■ Head Width (In.)	.410
■ Head Width (mm)	10.4
■ Locking Style	Releasable
■ Marker Type	Wrap / Flag
■ Marker Write-On Area (In.)	.44 x .96
■ Marker Write-On Area (mm)	11.2 x 24.4
■ Material Flammability Rating	UL 94V-2
■ Max. Bundle Diameter (In.)	1.75

▪ Max. Bundle Diameter (mm)	45
▪ Max. Continuous Use Temperature	185°F (85°C)
▪ Min. Loop Tensile Strength (Lbs.)	50
▪ Min. Loop Tensile Strength (N)	222
▪ Pricing Description	Marker Tie, 2-Piece, 6.7"L (170mm), Standard, Nylon, Natural
▪ Thickness (In.)	.045
▪ Thickness (mm)	1.1
▪ Tool	GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2
▪ Min. Order UOM	PC
▪ Min. Order Qty.	500
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

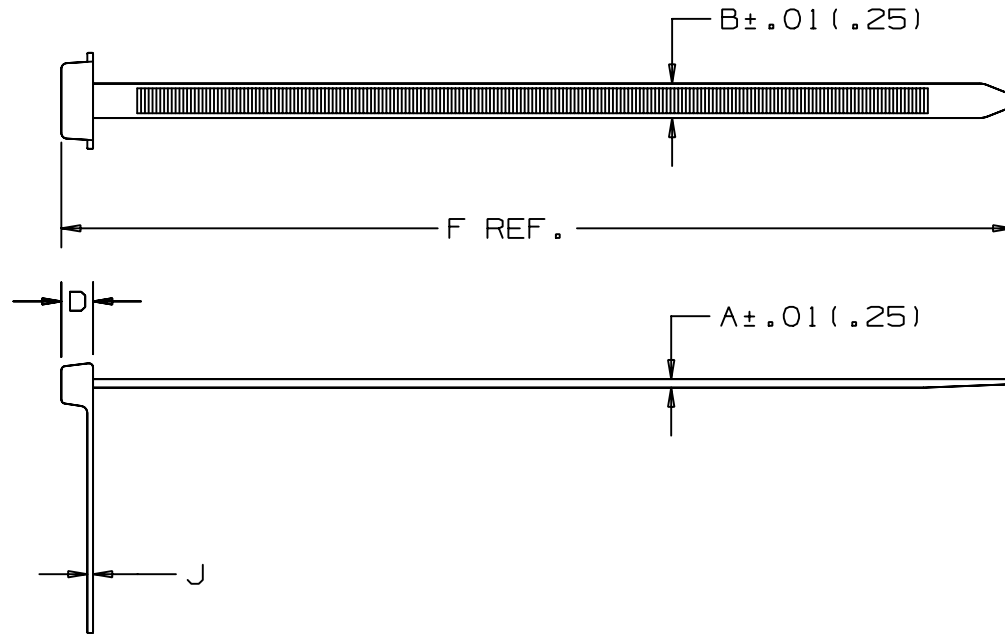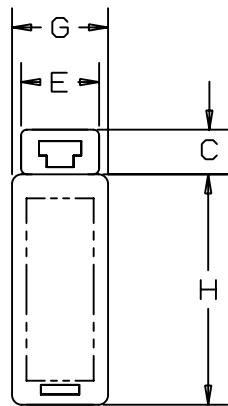

PANDUIT PART NO.*	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	H in (mm)	J in (mm)	WRITE-ON AREA in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	WEIGHT lbs/100pcs. (g)
	MIN. in (mm)	MAX. in (mm)													
SSM2S	.06 (1.5)	1.75 (45)	.045 (1.1)	.180 (4.6)	.230 (5.8)	.165 (4.2)	.410 (10.4)	6.7 (170)	.50 (12.7)	1.18 (30)	.030 (.8)	.44 × .96 (11.2 × 24.4)	50 (222)	STANDARD	.29 (132)
SSM4S	.06 (1.5)	4.00 (102)	.045 (1.1)	.180 (4.6)	.230 (5.8)	.165 (4.2)	.410 (10.4)	14.9 (378)	.50 (12.7)	1.18 (30)	.030 (.8)	.44 × .96 (11.2 × 24.4)	50 (222)	STANDARD	.55 (249)

NOTES:

- \*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

PANDUIT CORP. TINLEY PARK, ILLINOIS

STA-STRAP MARKER TIE  
SSM SERIES

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± .005  
(.XX) ± .02  
(.XXX) ± .020  
ANGLES ± .5

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY  
RTF/AJC

MAT'L:

SCALE  
NONE

DATE  
8-8-66

NYLON 6.6

DRAWING NO.

SS-630

DWG  
A  
SIZE

10	5/31/05	ERW		METRIC CONVERSION CORRECTIONS	630	10									
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP							