

GFCIs Decorator Combination Nightlight/GFCI Receptacles


15 & 20A, 125VAC

Pass & Seymour




GFCIs

Features	
<ul style="list-style-type: none"> ■ Meets 2006 UL requirements. ■ SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. ■ Sealed nightlight with high impact-resistant Lexan® lens prevents tampering. ■ Nightlight uses cooler LED illumination. ■ Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement. ■ Photocell turns nightlight ON in dark, OFF in daylight. ■ Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. ■ Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. ■ FSUL Listed (Federal Specification WC596). ■ Trip indicator light (red lamp). ■ Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. 	<ul style="list-style-type: none"> ■ Two back wire holes per terminal. ■ Ground screw has a back wire clamp for easy installation. ■ 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. ■ Mounting screws are shipped captive in the device and wall plate for easier installation. ■ High-impact-resistant thermoplastic construction. ■ Extra-long strap. ■ Button colors match the device face. ■ Dual-direction test and reset buttons. ■ Class A rated GFCI. ■ Supplied with matching TP26 nylon wall plate. ■ Tri-drive screws.
Specifications	
<ul style="list-style-type: none"> ■ Supply Voltage: 125VAC, 60 Hz ■ Supply Voltage Range: 102-132 VAC ■ Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> ■ Trip Time: 0.025 sec., nominal per UL Standard ■ 20 Amp feed-thru capacity

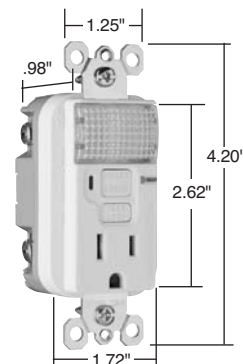

1595-NTLWCC4

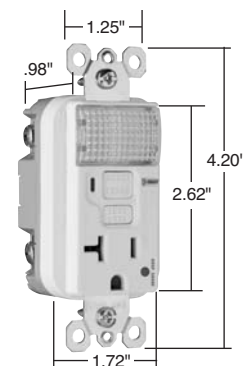

2095-HGNTLW



NEMA 5-15R



NEMA 5-20R

Catalog Number	Rating A. VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Combination Nightlight/GFCI							
1595-NTLICCC4	15 125	0.1618	Ivory	5-15R	•	•	•
1595-NTLWCC4	15 125	0.1618	White	5-15R	•	•	•
1595-NTLBKCC4	15 125	0.1618	Black	5-15R	•	•	•
1595-NTLLACC4	15 125	0.1618	Light Almond	5-15R	•	•	•
2095-NTLI	20 125	0.1233	Ivory	5-20R	•	•	•
2095-NTLW	20 125	0.1233	White	5-20R	•	•	•
2095-NTLGRY	20 125	0.1233	Gray	5-20R	•	•	•
2095-NTLRED	20 125	0.1233	Red	5-20R	•	•	•
2095-NTLLA	20 125	0.1233	Light Almond	5-20R	•	•	•
Hospital Grade Combination Nightlight/GFCI							
1595-HGNTLI	15 125	0.1618	Ivory	5-15R	•	•	•
1595-HGNTLW	15 125	0.1618	White	5-15R	•	•	•
1595-HGNTL	15 125	0.1618	Brown	5-15R	•	•	•
1595-HGNTLGRY	15 125	0.1618	Gray	5-15R	•	•	•
1595-HGNTLRED	15 125	0.1618	Red	5-15R	•	•	•
1595-HGNTLLA	15 125	0.1618	Light Almond	5-15R	•	•	•
2095-HGNTLI	20 125	0.1233	Ivory	5-20R	•	•	•
2095-HGNTLW	20 125	0.1233	White	5-20R	•	•	•
2095-HGNTL	20 125	0.1233	Brown	5-20R	•	•	•
2095-HGNTLGRY	20 125	0.1233	Gray	5-20R	•	•	•
2095-HGNTLRED	20 125	0.1233	Red	5-20R	•	•	•
2095-HGNTLLA	20 125	0.1233	Light Almond	5-20R	•	•	•

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page U-42 for more information.

Available Spring 2006.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Combination GFCI Receptacles