


Straight Blade Devices Heavy-Duty Specification Grade Receptacles

15 & 20A, 125 & 250V

Features

- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- High strength nylon face.
- Internal screw-pressure-plate back and side wired to accept #14 and #10 AWG stranded or solid copper or copper-clad conductors. Eight back wire holes.
- Auto-ground clip assures positive ground.

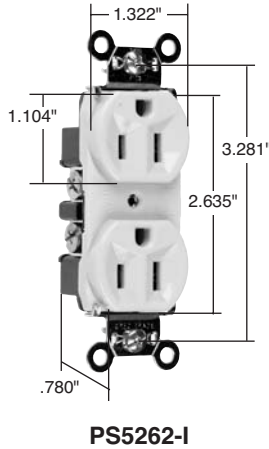

| Catalog Number | Rating A. V. | Color | NEMA Config. No. | 3rd Party Compliance | | |
|------------------------------------------------|-----------------|--------------|---------------------|----------------------|---------------|--------------------|
| | | | | UL498 | FSUL WC596 | CS C22.2 No. 42 |
| Duplex Receptacles Back & Side Wire | | | | | | |
| PS5262-I | 15 125 | Ivory | 5-15R | • | • | • |
| PS5262-W | 15 125 | White | 5-15R | • | • | • |
| PS5262 | 15 125 | Brown | 5-15R | • | • | • |
| PS5262-GRY | 15 125 | Gray | 5-15R | • | • | • |
| PS5262-BK | 15 125 | Black | 5-15R | • | • | • |
| PS5262-RED | 15 125 | Red | 5-15R | • | • | • |
| PS5262-LA | 15 125 | Light Almond | 5-15R | • | • | • |
| PS5262-BL | 15 125 | Blue | 5-15R | • | • | • |
| PS5362-I | 20 125 | Ivory | 5-20R | • | • | • |
| PS5362-W | 20 125 | White | 5-20R | • | • | • |
| PS5362 | 20 125 | Brown | 5-20R | • | • | • |
| PS5362-GRY | 20 125 | Gray | 5-20R | • | • | • |
| PS5362-BK | 20 125 | Black | 5-20R | • | • | • |
| PS5362-RED | 20 125 | Red | 5-20R | • | • | • |
| PS5362-LA | 20 125 | Light Almond | 5-20R | • | • | • |
| PS5362-BL | 20 125 | Blue | 5-20R | • | • | • |
| 5662-I | 15 250 | Ivory | 6-15R | • | • | • |
| 5662-W | 15 250 | White | 6-15R | • | • | • |
| 5662 | 15 250 | Brown | 6-15R | • | • | • |
| 5862-I | 20 250 | Ivory | 6-20R | • | • | • |
| 5862-W | 20 250 | White | 6-20R | • | • | • |
| 5862 | 20 250 | Brown | 6-20R | • | • | • |
| 5862-GRY | 20 250 | Gray | 6-20R | • | • | • |
| 5862-BK | 20 250 | Black | 6-20R | • | • | • |
| 5862-RED | 20 250 | Red | 6-20R | • | • | • |

For Configurable Solutions, see Page U-1.

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R



NEMA
6-15R



NEMA
6-20R