

Straight Blade Devices


TVSS Straight Blade Receptacles

15 & 20A, 125VAC


Pass & Seymour



Specifications	
<ul style="list-style-type: none"> ■ UL1449 (latest revision). (1.2 x 50μs 6000V, 8 x 20μs 3000A). ■ 1 filtering capacitor for 7 to 1 average noise reduction. ■ Nominal let-through (suppressed) voltage in all 3 modes, 500V. ■ Response time less than 1 nanosecond for unmounted MOV. ■ Overcurrent protection in all 3 modes. ■ Electronic components potted for electrical, mechanical and thermal stability. ■ Thermal protection in all 3 modes. ■ Leakage current: 0.5mA at 25°C/120VAC. 	<ul style="list-style-type: none"> ■ 3 18mm dual pack MOVs to suppress transients in all modes – equally. ■ Common mode noise attenuation: 500 KHz to 30 MHz; up to 35dB (50 ohm source impedance) ■ Varistor voltage: 150V RMS. ■ Back and side wire capability including ground terminal. ■ Operating temperature: -40°C to 85°C (-40°F to 185°F) ■ Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45.
Specification, Hospital and Isolated Ground Receptacles	
<ul style="list-style-type: none"> ■ Audible alarm able to be turned on/off. ■ LED indicator light. ■ 210 joules of energy absorption in each of the three modes. 	<ul style="list-style-type: none"> ■ 13,000 amps current handling capability in each of three modes: line to neutral, line to ground, neutral to ground. ■ Isolated Ground version complies with NEC 410-56 (C) and 250-74 exception 4.
Commercial Receptacles	
<ul style="list-style-type: none"> ■ LED indicator light. ■ 130 joules of energy absorption in each of the three modes. 	<ul style="list-style-type: none"> ■ 9,000 amps current handling capability in each of three modes: line to neutral, line to ground, neutral to ground.

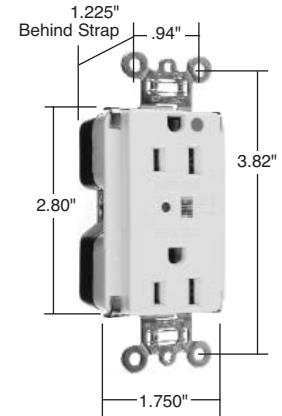


8200-ISP

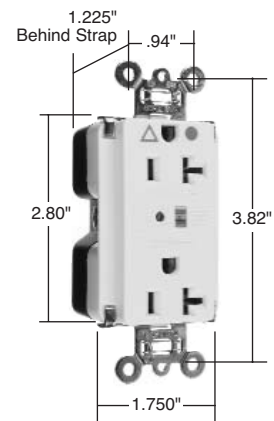

IG8300-ISP

2 Pole, 3 Wire




All devices listed on this page conform to NEMA WD-1 and WD-6. Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance			
				UL1449	UL498	FSUL WC596	cUL/CSA
Hospital Grade Duplex Receptacles Back & Side Wire							
8200-ISP	15 125	Ivory	5-15R	•	•	•	•
8200-WSP	15 125	White	5-15R	•	•	•	•
8200-SP	15 125	Brown	5-15R	•	•	•	•
8200-GRYSP	15 125	Gray	5-15R	•	•	•	•
8200-REDSP	15 125	Red	5-15R	•	•	•	•
8200-LASP	15 125	Light Almond	5-15R	•	•	•	•
8200-BLSP	15 125	Blue	5-15R	•	•	•	•
8300-ISP	20 125	Ivory	5-20R	•	•	•	•
8300-WSP	20 125	White	5-20R	•	•	•	•
8300-SP	20 125	Brown	5-20R	•	•	•	•
8300-GRYSP	20 125	Gray	5-20R	•	•	•	•
8300-REDSP	20 125	Red	5-20R	•	•	•	•
8300-LASP	20 125	Light Almond	5-20R	•	•	•	•
8300-BLSP	20 125	Blue	5-20R	•	•	•	•
Isolated Ground Hospital Grade Duplex Receptacles Back & Side Wire							
IG8200-ISP	15 125	Ivory	5-15R	•	•	•	•
IG8200-WSP	15 125	White	5-15R	•	•	•	•
IG8200-GRYSP	15 125	Gray	5-15R	•	•	•	•
IG8200-LASP	15 125	Light Almond	5-15R	•	•	•	•
IG8200-BLSP	15 125	Blue	5-15R	•	•	•	•
IG8200-OSP	15 125	Orange	5-15R	•	•	•	•
IG8300-ISP	20 125	Ivory	5-20R	•	•	•	•
IG8300-WSP	20 125	White	5-20R	•	•	•	•
IG8300-GRYSP	20 125	Gray	5-20R	•	•	•	•
IG8300-LASP	20 125	Light Almond	5-20R	•	•	•	•
IG8300-BLSP	20 125	Blue	5-20R	•	•	•	•
IG8300-OSP	20 125	Orange	5-20R	•	•	•	•




Straight Blade Devices TVSS Straight Blade Receptacles


15 & 20A, 125VAC

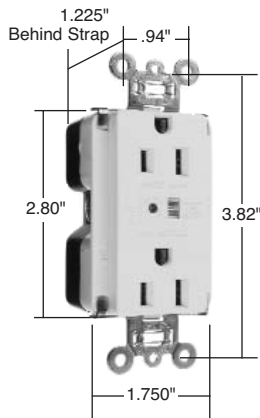

5262-ISP

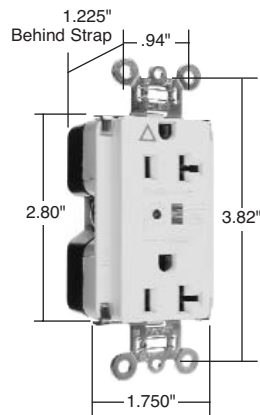

IG5362-ISP

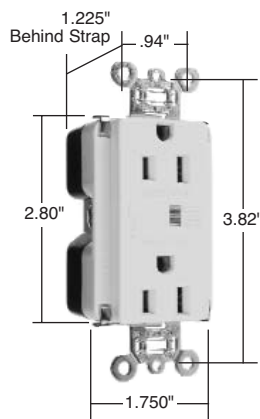

5252-ISP

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance			
	A.	VAC			UL1449	UL498	FSUL WC596	cUL/CSA
Extra Heavy-Duty Spec. Grade Duplex Receptacles Back & Side Wire*								
5262-ISP	15	125	Ivory	5-15R	•	•	•	•
5262-WSP	15	125	White	5-15R	•	•	•	•
5262-SP	15	125	Brown	5-15R	•	•	•	•
5262-GRYSP	15	125	Gray	5-15R	•	•	•	•
5262-REDSP	15	125	Red	5-15R	•	•	•	•
5262-LASP	15	125	Light Almond	5-15R	•	•	•	•
5262-BLSP	15	125	Blue	5-15R	•	•	•	•
5362-ISP	20	125	Ivory	5-20R	•	•	•	•
5362-WSP	20	125	White	5-20R	•	•	•	•
5362-SP	20	125	Brown	5-20R	•	•	•	•
5362-GRYSP	20	125	Gray	5-20R	•	•	•	•
5362-REDSP	20	125	Red	5-20R	•	•	•	•
5362-LASP	20	125	Light Almond	5-20R	•	•	•	•
5362-BLSP	20	125	Blue	5-20R	•	•	•	•
Isolated Ground Spec. Grade Duplex Receptacles Back & Side Wire								
IG5262-ISP	15	125	Ivory	5-15R	•	•	•	•
IG5262-WSP	15	125	White	5-15R	•	•	•	•
IG5262-GRYSP	15	125	Gray	5-15R	•	•	•	•
IG5262-BLSP	15	125	Blue	5-15R	•	•	•	•
IG5262-OSP	15	125	Orange	5-15R	•	•	•	•
IG5362-ISP	20	125	Ivory	5-20R	•	•	•	•
IG5362-WSP	20	125	White	5-20R	•	•	•	•
IG5362-GRYSP	20	125	Gray	5-20R	•	•	•	•
IG5362-LASP	20	125	Light Almond	5-20R	•	•	•	•
IG5362-BLSP	20	125	Blue	5-20R	•	•	•	•
IG5362-OSP	20	125	Orange	5-20R	•	•	•	•
Specification Grade Duplex Receptacles Back & Side Wire*								
5252-ISP	15	125	Ivory	5-15R	•	•	•	•
5252-WSP	15	125	White	5-15R	•	•	•	•
5252-GRYSP	15	125	Gray	5-15R	•	•	•	•
5252-LASP	15	125	Light Almond	5-15R	•	•	•	•
5252-BLSP	15	125	Blue	5-15R	•	•	•	•
5352-ISP	20	125	Ivory	5-20R	•	•	•	•
5352-WSP	20	125	White	5-20R	•	•	•	•
5352-GRYSP	20	125	Gray	5-20R	•	•	•	•
5352-LASP	20	125	Light Almond	5-20R	•	•	•	•
5352-BLSP	20	125	Blue	5-20R	•	•	•	•

*For Configurable Solutions, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Catalog Number	Description	Catalog Number	Description	Color
Wall Plates for TVSS Duplex Receptacles				
SS26	Stainless Steel Decorator	TP26-IG**	Thermoplastic Decorator	Orange
SS26-IG**	Stainless Steel Decorator	TP26-BL	Thermoplastic Decorator	Blue
SB26	Brass Decorator		**For Isolated Ground	