

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

▶ Extract from the online catalog



Sensor/actuator box, shielded, without LED, with master cable, marker tags and double-occupied slots

The illustration shows a version with 8 slots

Order No.	1695786
Ord designation	SACB-4/ 8- 5,0PUR SH
EAN	4017918899424
Pack	1 Pcs.
Customs tariff	85445190
Catalog page information	Page 142 (PC-2005)

▶ Technical data

General data


Nominal voltage U_N	48 V AC
Nominal voltage U_N	60 V DC
Ambient temperature (operation)	-25 °C ... 70 °C
Degree of protection	IP65/IP67
Number of positions	5
Max. current carrying capacity per path	2 A
SACB total current	12 A
Number of slots	4
Sensor/actuator connection system	M 12 female connector

Master cable data

Type of connection	Fixed connection
Fixed cable length	5 m
Cable type	Master cable suitable for flexible cable conduit
Ambient temperature (operation)	-40 °C ... 90 °C (for fixed installation)
Ambient temperature (operation)	-5 °C ... 80 °C (for flexible installation)
Signal line cross section, flexible	0.5 mm ²
Power supply cross section, flexible	1 mm ² (per wire)
External diameter	9.4 mm
AWG power supply	17
AWG signal line	24

► Drawings

Schematic diagram

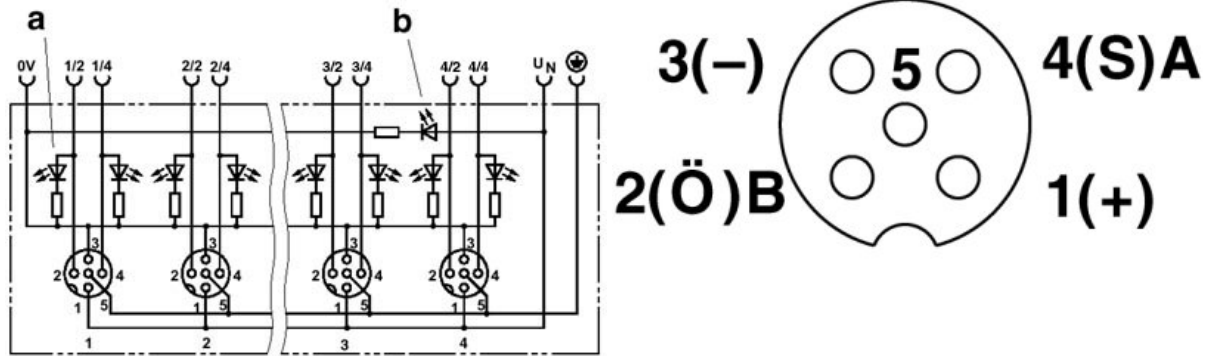



► **Address**

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057
USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>
Phoenix Contact
Technical modifications reserved;