


Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

▶ Extract from the online catalog

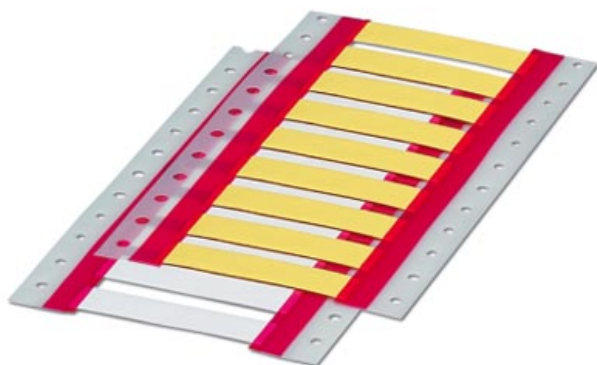

Marker for thermal transfer printer, perforated 3-way, white, labeling field: 12.5 x 5 mm, can be used for 2.4 mm diameter, shrinkage ratio 3:1, 1 roll = 1000
Marker at 12.5 mm

Order No.	0817426
Ord designation	WMS 2,4 (12,5X5)R
EAN	4046356108522
Pack	1 Pcs.
Customs tariff	39269097
Weight/Piece	0.355 KG
Catalog page information	Page 464 (CL-2007)

▶ Product notes

WEEE/RoHS-compliant since: 05/11/2006



IMPORTANT : This date is valid for Customers in Germany only. Date Format is MM/DD/YYYY. Please contact your local in-country Phoenix Contact location or designated business partner for a Logistics Compliant date in your area. In order to guarantee delivery of RoHS-Compliant product, please purchase Phoenix Contact parts from authorized Phoenix Contact representatives and distributors.

▶ Technical data

General

Length	50 mm
Width	5 mm

WMS 2,4 (12,5X5)R



Color	white
Base element material	polyolefine
Wipe resistance	DIN EN 61010-1/VDE 0411-1
Ambient temperature (operation)	-55 °C ... 135 °C
Components	Silicone-free
Material	Polyolefine

► Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057
USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>
Phoenix Contact
Technical modifications reserved;