

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog



Bus system plug connector, male, straight, 4-pos., M12, shielded, D-coded, screw connection, metal knurl, cable screw connection Pg7

Order No.	1521258
Ord designation	SACC-M12MSD-4CON-PG 7-SH
EAN	4017918968601
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.0514 KG
Catalog page information	Page 39 (PC-2007)

► Product notes

WEEE/RoHS-compliant since: 04/13/2006



IMPORTANT : This date is valid for Customers in Germany only. Date Format is MM/DD/YYYY. Please contact your local in-country Phoenix Contact location or designated business partner for a Logistics Compliant date in your area. In order to guarantee delivery of RoHS-Compliant product, please purchase Phoenix Contact parts from authorized Phoenix Contact representatives and distributors.



▶ **Technical data**

General data

Nominal current I_N	4 A
Nominal voltage U_N	250 V
Number of positions	4
Volume resistance	$\leq 3 \text{ m}\Omega$
Ambient temperature (operation)	-40 °C ... 85 °C
Pg screw connection	Pg7

General characteristics


Keying	D - data
Inflammability class acc. to UL 94	V0
Surge voltage category	II
Contamination class	3
Degree of protection	IP67
Material of contact	CuZn
Material of contact surface	Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Nickel-plated brass
Conductor cross section stranded min.	0.25 mm^2
Conductor cross section stranded max.	0.75 mm^2
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max.	18
Type of connection	Screw connection
Volume resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$

Conductor data

Minimum external conductor diameter	4 mm
Maximum external conductor diameter	6 mm
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max.	18

► Drawings

Functional drawing

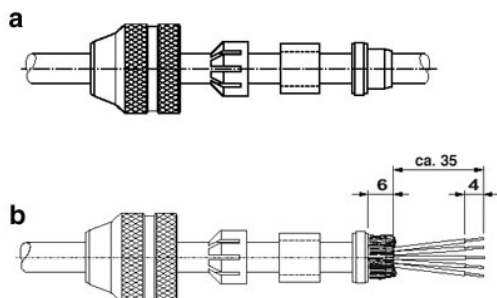


Assembly steps for M12 male/female connector and conductor

a = Slide on parts


b= Strip conductor, widen shield and lay around the shielding ring, cut off projecting mesh. Slide cores through the housing. Mount shielding ring, gasket and clamping cage. Tighten pressure screw to fix the cable. Screw down cores. Mount male/female part. Tighten pressure screw.

Dimensioned drawing

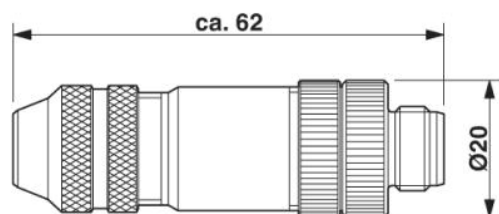

M12 x 1 male connector, straight, shielded

Schematic diagram

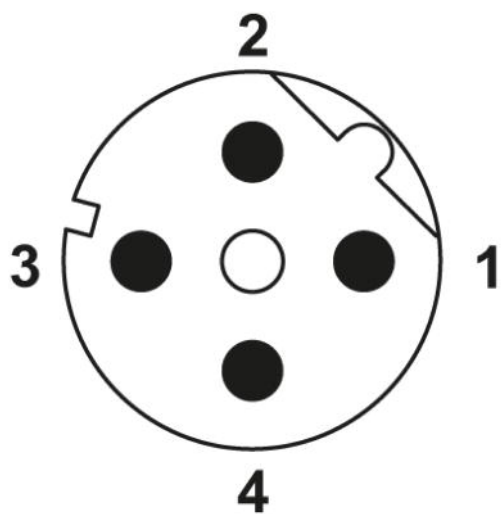

Pin assignment M12 male connector, 4-pos., D-coded, male side

Logo



Ethernet

► Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>
Phoenix Contact
Technical modifications reserved;