

NLC-050-024D-06I-04QTN-00A

Order No.: 2701030



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2701030>

24 V DC nanoLine base unit. Equipped with 6 digital input and 4 NPN digital output channels. Additional I/O channels can be added using a maximum of three I/O expansion modules. Optional communication modules provide network or serial connectivity. Optional Operator Panel provides user interface. Programming is via nanoNavigator.

Commercial data	
EAN	4046356325370
Pack	1 pcs.
Customs tariff	85371099
Weight/Piece	0.3026 KG
Catalog page information	Page 258 (NTK-2008)

Product notes

WEEE/RoHS-compliant since:
04/18/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Interfaces	
Interface	Operator Panel
Type of connection	RJ45 / Combicon
Interface	RS-232

Type of connection	Slot 1
Interface	USB
Type of connection	Slot 1
Interface	Real-Time Clock
Type of connection	Slot 2

Supply

Connection supply	Screw connection
Supply voltage	24 V DC (Power available to the I/O and Communications modules)
Range of supply voltages	19 V DC ... 30 V DC
Max. current consumption	250 mA
Typical current consumption	92 mA

Software interfaces

Programming tool	nanoNavigator
------------------	---------------

Digital inputs

Input name	Digital inputs
Description of the input	EN 61131-2 type 1 NPN/PNP
Type of connection	Screw connection
Number of inputs	6
Typical response time	on 60 µs off 70 µs
Input voltage	24 V DC
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	15 V DC ... 30 V DC
Nominal input current at U_{IN}	5 mA DC (On)

Digital outputs

Output name	Digital outputs
Output description	NPN outputs
Type of connection	Screw connection
Number of outputs	4
Maximum output current per channel	500 mA
Protective circuitry	Short circuit and overload protection
Output voltage	24 V DC

Maximum output current per module / terminal block	2 A
Maximum output current per module	2 A
Nominal load, inductive	12 VA ((1.2H))
Nominal load, lamp	12 W
Nominal load, ohmic	12 W

General data


Width	80.5 mm
Height	103.5 mm
Depth	60 mm
Mounting type	DIN rail
Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C

Accessories


Item	Designation	Description
General		
2701289	NLC-MOD-CAP	Replacement cover for slot 1 in base unit.
2701292	NLC-MOD-CAP-PXC	Replacement cover for slot 2 in base unit.

Drawings

Connection diagram

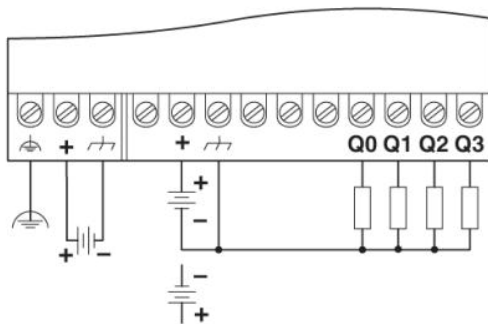

Dimensioned drawing

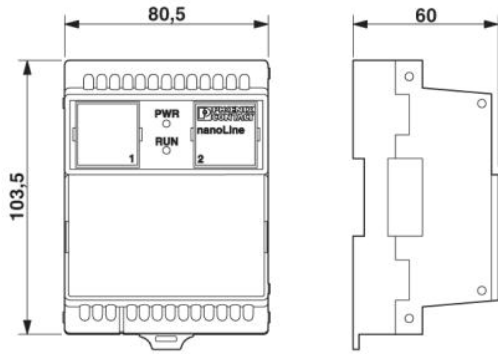

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2009 Phoenix Contact
Technical modifications reserved;