

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog



Housing cover, for connection on both sides

Illustration shows a fully mounted version of the electronic housing

Order No.	2764179
Ord designation	EG 45-A/ABS GN
EAN	4017918065881
Pack	10 Pcs.
Customs tariff	85369010
Catalog page information	Page 375 (CC-2005)

► Technical data

General

Housing material	Acryl butadiene styrene (ABS)
Color	green

Dimensions / positions

Length	75 mm
Constructional height	17.5 mm
Width	45 mm
Number of positions	16


Technical data

Ambient temperature (operation)	80 ° C
Inflammability class acc. to UL 94	HB


► Drawings

Explosion drawing

Dimensioned drawing

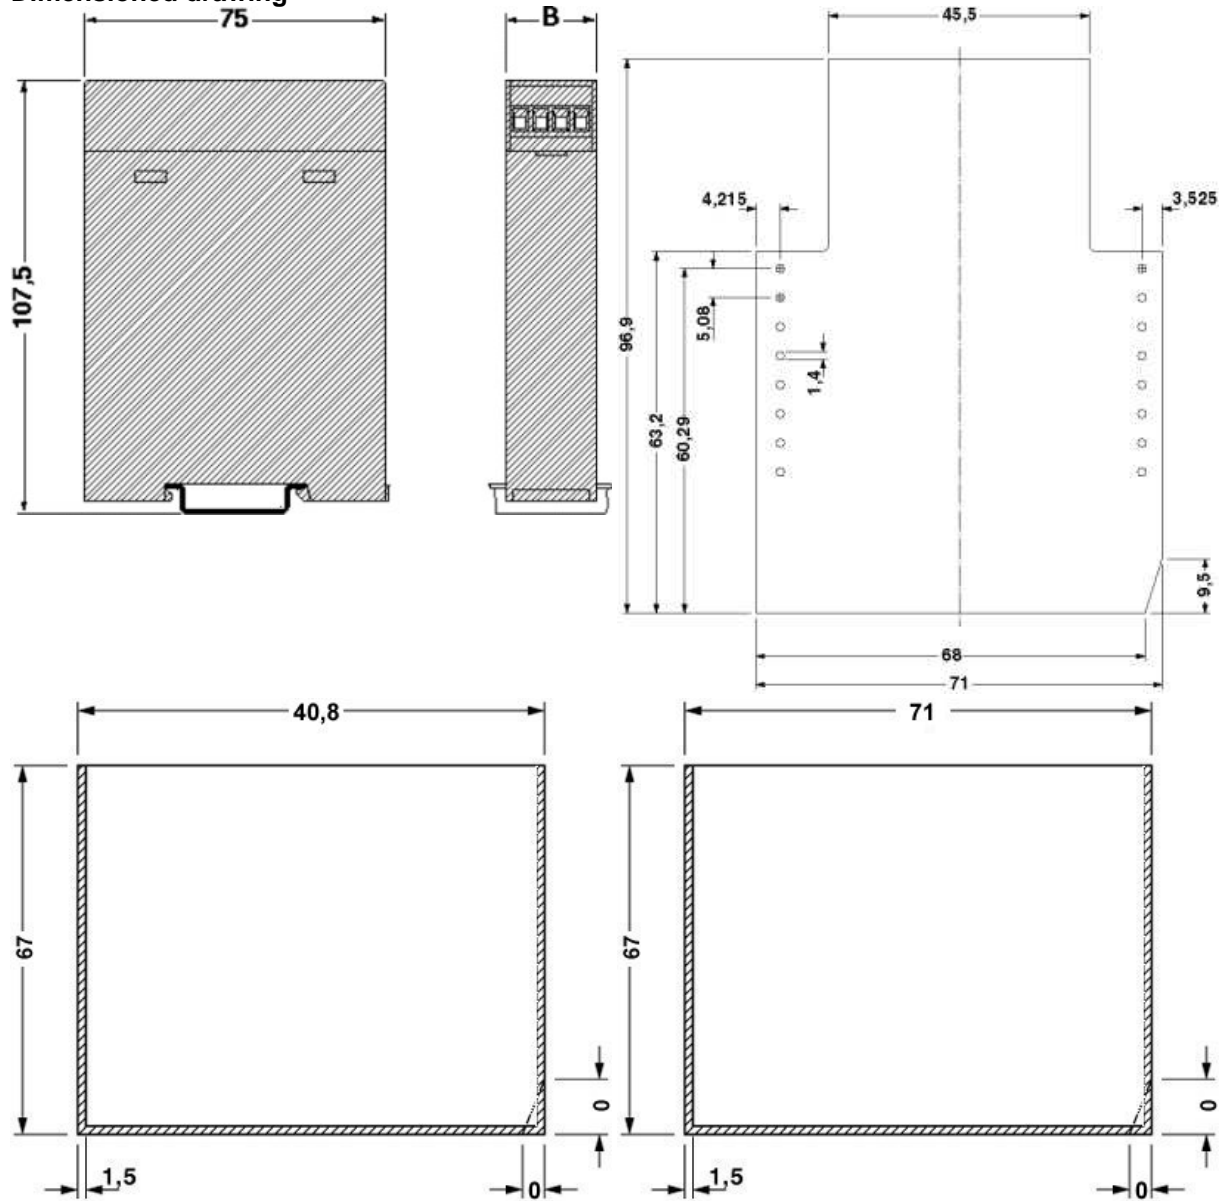

EG 45-A/ABS GN

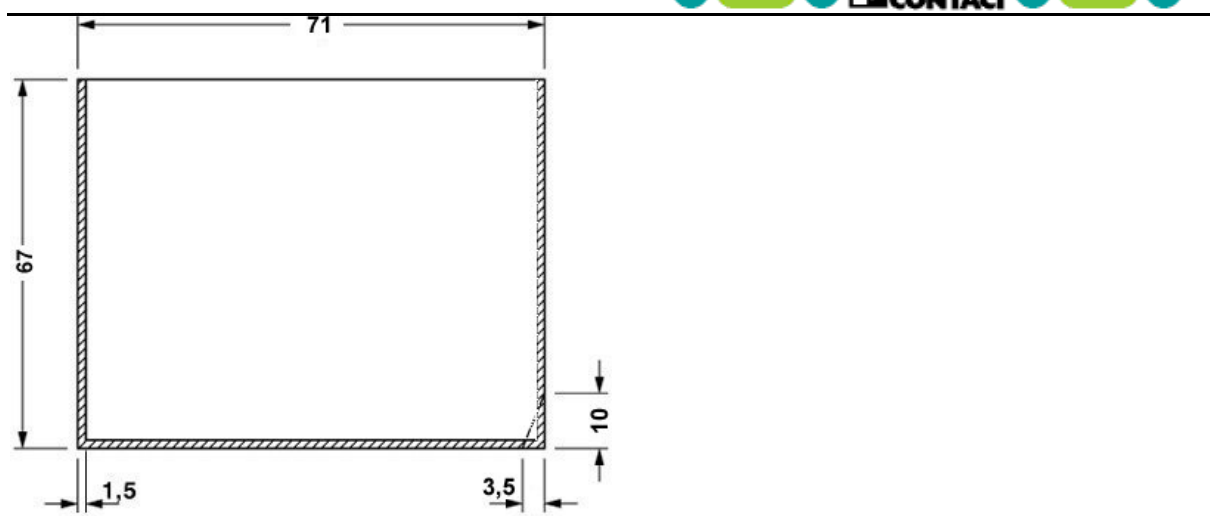

► Accessories

Item	Designation	Description
Assembly		
1909278	FKCT 2,5/ 8-ST	Plug component, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 8, type of connection: Spring-cage connection
General		
1902178	FKCT 2,5/ 8-ST-5,08	Plug component, nominal current: 12 A, rated voltage: 250 V, pitch: 5.08 mm, no. of positions: 8, type of connection: Spring-cage connection
1721045	MKKDSH 3/ 2	Printed circuit terminal block, nominal current: 24 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 2, mounting: Soldering, type of connection: Screw connection, connection direction from the conductor to the PCB: 0°
1721346	MKKDSH 3/ 3	Printed circuit terminal block, nominal current: 24 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering, type of connection: Screw connection, connection direction from the conductor to the PCB: 0°
1703283	MKKDSH 3/ 8	Printed circuit termination blocks, pitch 5, for soldering onto the printed circuit board, 8-pos.
1792582	MVSTBW 2,5/ 8-ST	Plug component, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 8, type of connection: Screw connection
1792812	MVSTBW 2,5/ 8-ST-5,08	Plug component, nominal current: 12 A, rated voltage: 250 V, pitch: 5.08 mm, no. of positions: 8, type of connection: Screw connection
Plug/Adapter		
1784309	MVSTBW 2,5/ 8-STEH	Plug with release aid, nominal current: 12 A, rated voltage: 250 V, pitch: 5,0 mm, no. of positions: 8, type of connection: Screw connection

► **Address**

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 1200
<http://www.phoenixcontact.com>
Phoenix Contact
Technical modifications reserved;