

QUINT-BAT/24DC/12AH

Order No.: 2866365

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2866365>

Battery module, 24 V DC, 12.0 Ah

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4017918959760 |
| Pack | 1 Pcs. |
| Customs tariff | 85072098 |
| Weight/Piece | 10.4475 KG |
| Catalog page information | Page 495 (IF-2007) |

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Input data**

| | |
|-----------------------|--------------------------------|
| Nominal input voltage | 24 V DC |
| Current consumption | 3 A (charging process) |
| Buffer period | (refer to the selection table) |

Output data

| | |
|------------------------|---------------------------------------|
| Nominal output voltage | 24 V DC |
| Output current | Max. 50 A |
| Connection in parallel | Yes, for increasing the buffer period |
| Connection in series | No |
| Output fuse | 2x 25 A |

General data

| | |
|---|----------------|
| Width | 231 mm |
| Height | 156 mm |
| Depth | 123 mm |
| Weight | 9 kg |
| Memory medium | battery 12 Ah |
| Degree of protection | IP20 |
| Class of protection | III |
| Ambient temperature (operation) | 0 °C ... 40 °C |
| Ambient temperature (storage/transport) | 0 °C ... 40 °C |

Certificates / Approvals




Certification ABS, GL

Accessories

| Item | Designation | Description |
|---------|-----------------|---|
| 2866857 | QUINT-ADAPTER/4 | Assembly adapter for QUINT-BAT/24DC... on 35mm rail |

Drawings

Block diagram

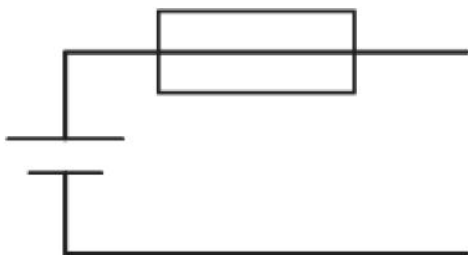

Address

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2008 Phoenix Contact
Technical modifications reserved;