


PSA-110

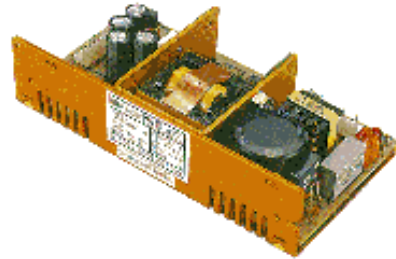

110W L-BRACKET STYLE
Universal

Dimensions

Length: 172.7mm (6.81in)

Height: 43.6mm (1.7in)


Width: 93.5mm (3.7in)

Weight: 0.72kgm (1.6lb)

MODEL	O/P1	O/P2	O/P3	O/P4
PSA-110-112	12V/9.0A			
PSA-110-115	15V/7.3A			
PSA-110-124	24V/4.5A			



110W Universal Industrial Series PSA110 Single Output L-Bracket

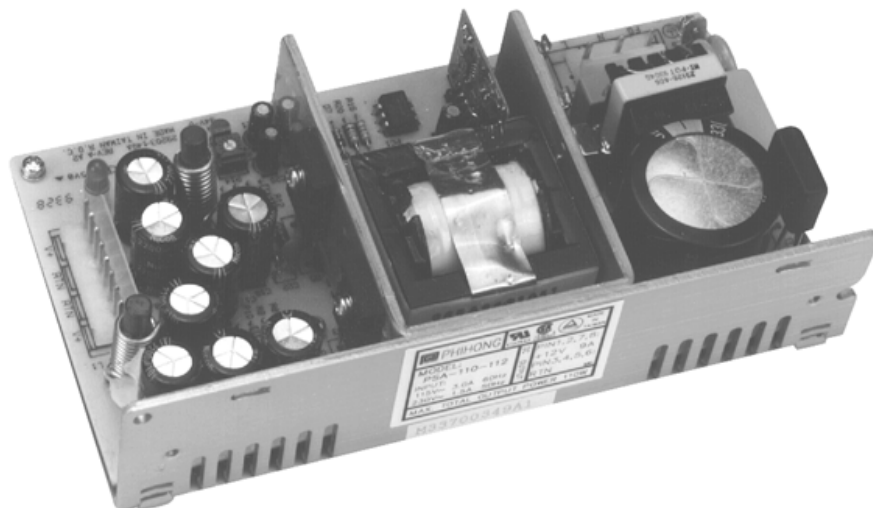

Features

- Integral EMI filter
- 100% Burn-In
- Low Profile Design
- Over Voltage Protection

Applications

- Network
- Computer Peripherals
- Low Profile Racks
- Business Machines

Safety Approvals

- UL 1950
- CSA 22.2 234
- TUV EN 60950
- CE (Low Voltage Directive)

Mechanical Characteristics

- Dimensions:
- Length: 172.7mm (6.81in)
 - Width: 93.5mm (3.7in)
 - Height: 43.6mm (1.7in)
 - Weight: 0.72kgm (1.6lb)

Output Specifications

Model	DC Output Voltage	Load			Ripple P-P	Regulation	
		Min.	Convection	Max. ⁽²⁾		Line	Load
PSA110-105	+5V	1A	16A	22A	50mV	±2%	±2%
PSA110-112	+12V	0A	7A	9A	120mV	±2%	±2%
PSA110-115	+15V	0A	5A	7.3A	150mV	±2%	±2%
PSA110-124	+24V	0A	3.3A	4.5A	240mV	±2%	±2%

(1) Measured by using a 12 inch twisted pair terminated with a 10mfd capacitor and 0.1mfd ceramic capacitor in parallel with primary and secondary ground holes connected together.

(2) Forced air 30CFM required.

