


# SD-US/SC/LA/GY

Order No.: 2963860



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2963860>

Rail-mountable socket, with light indicator, housing color: gray, with screw connection, national version: USA, housing width 45 mm



Commercial data	
EAN	4017918859138
Pack	10 Pcs.
Customs tariff	85366990
Weight/Piece	0.07641 KG
Catalog page information	Page 513 (IF-2007)

#### Product notes

WEEE/RoHS-compliant since:  
07/20/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General data</b>	
Nominal voltage $U_N$	125 V AC
Nominal current $I_N$	15 A AC
Status display	Glow lamp or LED with preresistor
Material of contact	CuZn37
For country-specific use in	USA
Color	gray

Insulating material	PA
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C
Standards/regulations	IEC 83
	DIN 49440-1
	UL 498
Length	75 mm
Width	45 mm
Height	70.5 mm

#### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	30
Conductor cross section AWG/kcmil max	12
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M 3

#### Certificates / Approvals

#### Approval logo




#### requested approbations

Certification	CUL Listed, GOST, UL Listed
---------------	-----------------------------

## Drawings

### Circuit diagram

---

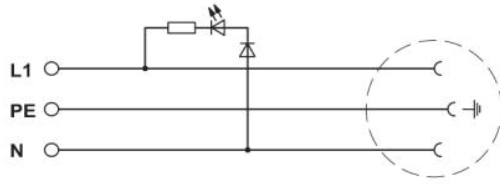

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2008 Phoenix Contact  
Technical modifications reserved;