



Input voltage up to 144 VDC
Single output of 3.3 to 36 VDC
No input-to-output isolation



Features

- RoHS lead solder exemption compliant
- Efficiency up to 97%
- Low input-output differential voltage
- No derating over temperature

Model Selection

Output		Input voltage V_i [VDC]	Rated power $P_{o\ tot}$ [W]	Efficiency η_{typ} [%]	Type	Options
$V_{o\ nom}$ [VDC]	$I_{o\ nom}$ [A]					
3.3	12	8 - 40	39.6	77	PSC 3E12-2	iR-Package
5.1	10	8 - 80	51	79	PSC 5A10-7iR	-9, L, P, C, D
5.1	11	8 - 40	56.1	79	PSC 5A11-2	iR-Package
5.1	12	7 - 40	61.2	83	PSC 5A12-7iR	-9, L, P, C, D
12	6	18 - 144	72	89	PSC 126-7iR	-9, L, P, C, D
12	8	15 - 80	96	90	PSC 128-7iR	-9, L, P, C, D
12	9	15 - 40	108	90	PSC 129-2	iR-Package
15	6	22 - 144	90	90	PSC 156-7iR	-9, L, P, C, D
15	8	19 - 80	120	91	PSC 158-7iR	-9, L, P, C, D
15	9	19 - 40	135	91	PSC 159-2	iR-Package
24	6	31 - 144	144	94	PSC 246-7iR	-9, L, P, C, D
24	8	29 - 80	192	94	PSC 248-7iR	-9, L, P, C, D
24	9	29 - 60	216	94	PSC 249-2	iR-Package
36	6	44 - 144	216	95	PSC 366-7iR	-9, L, P, C, D
36	8	42 - 80	288	96	PSC 368-7iR	-9, L, P, C, D
48	6	58-144	288	97	PSC 486-7iR	-9, L, P, C, D

Input

Input voltage	refer to selection chart
No load input current	-50 mA

Output

Efficiency	$V_{i\text{nom}}, I_{o\text{nom}}$	up to 96%
Output voltage setting accuracy	$V_{i\text{nom}}, I_{o\text{nom}}$	$\pm 0.6\% V_{o\text{nom}}$
Output voltage switching noise	IEC/EN 61204, total	typ. 0.4%
Line regulation	$V_{i\text{min}} - V_{i\text{max}}, I_{o\text{nom}}$	typ. $\pm 0.3\%$
Load regulation	$V_{i\text{nom}}, 0 - I_{o\text{nom}}$	typ. 0.3%
Minimum load	not required	0 A
Current limitation	rectangular U/I characteristic	typ. 110% $I_{o\text{nom}}$
Operation in parallel	by current limitation	

Protection

Input reverse polarity	with external fuse (built-in fuse with option C installed)
Input undervoltage lockout	typ. 80% $V_{i\text{min}}$
Input transient protection	suppressor diode
Output	no-load, overload and short circuit proof
Output overvoltage	suppressor diode typ. 150% $V_{o\text{nom}}$

Safety

Approvals	EN 60950, UL 1950, CSA C22.2 No. 950
Protection degree	IP 20
Electric strength test voltage	I/case and O/case 500/750/1500 V DC

EMC

Electrostatic discharge	IEC/EN 61000-4-2
Electromagnetic field	IEC/EN 61000-4-3
Electr. fast transients/bursts	IEC/EN 61000-4-4
Surge	IEC/EN 61000-4-5
Conducted disturbances	IEC/EN 61000-4-6
Electromagnetic emissions	CISPR 22/EN 55022

Environmental

Operating ambient temperature	-2, $V_{i\text{nom}}, I_{o\text{nom}}$, convection cooled	-10 to 50°C
Operating case temperature T_C	-2, $V_{i\text{nom}}, I_{o\text{nom}}$	-10 to 80°C
Storage temperature	-2, non operational	-25 to 100°C
Operating ambient temperature	-7, $V_{i\text{nom}}, I_{o\text{nom}}$, convection cooled	-25 to 71°C
Operating case temperature T_C	-7, $V_{i\text{nom}}, I_{o\text{nom}}$	-25 to 95°C
Storage temperature	-7, non operational	-40 to 100°C
Damp heat	IEC/EN 60068-2-3	
Vibration, sinusoidal	IEC/EN 60068-2-6	
Shock	IEC/EN 60068-2-27	
Bump	IEC/EN 60068-2-29	
Random vibration	IEC/EN 60068-2-64	
MTBF	MIL-HDBK-217	

Options


Extended temperature range	-40 to 71°C, (ambient)	-9
Inhibit, TTL input, output(s) enabled if left open		i
Output voltage adjust	0 - 108% $V_{o\text{nom}}$	R
Output voltage adjust potentiometer	$\pm 8\% V_{o\text{nom}}$	P
Additional internal input filter		L
Thyristor crowbar on output		C
Input/output undervoltage monitor		D/D1

Mechanical data

Tolerances ± 0.3 mm (0.012") unless otherwise indicated.



09023

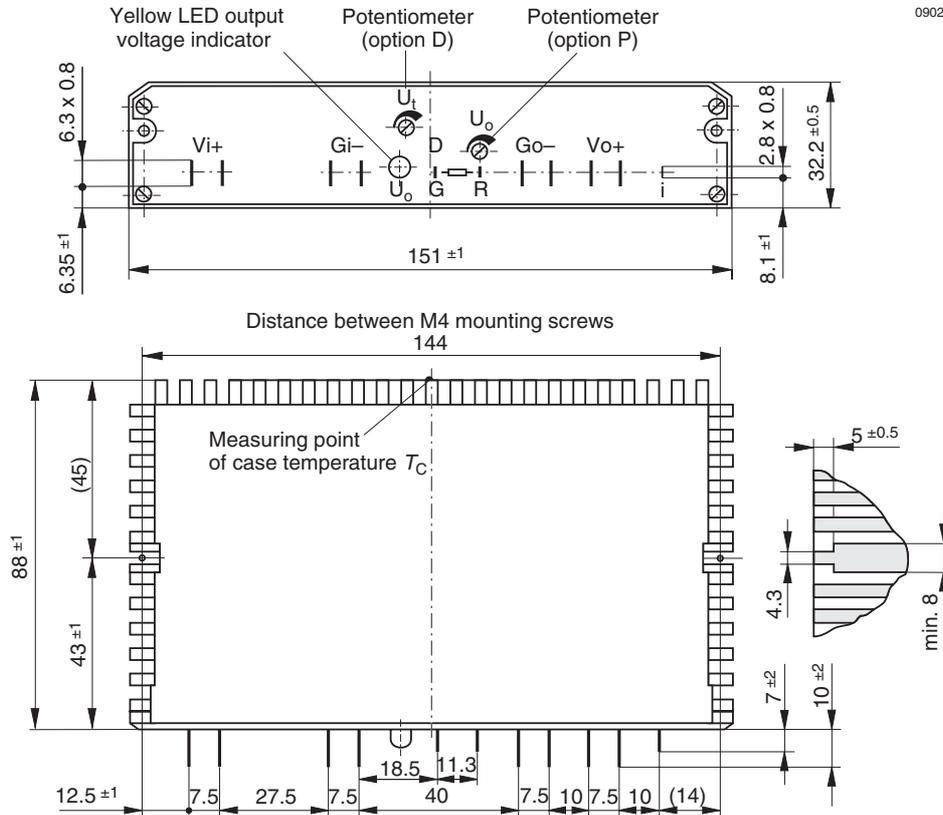

Accessories

- Isolation pads for easy and safe PCB mounting
- Ring core chokes for ripple and interference reduction

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.