



| PART NO. | PANEL THKNS. RANGE | HOLE DIAMETER | "A" REF. | MAX HOLDING BUNDLE DIA. "B" | "C" | PACKAGE |
|-------------|---------------------|-------------------------|-------------|-----------------------------|-----------|---------|
| PGSA-0407A | .016-.039 (0.4-1.0) | .272 (6.9) | .39 (9.8) | .19 (4.8) | .20 (5.0) | 1000 |
| PGSA-1013A | .039-.059 (1.0-1.5) | .512 (13.0) | .61 (15.5) | .38 (9.6) | .21 (5.4) | 500 |
| PGSA-1316A | .039-.055 (1.0-1.4) | .630 (16.0) | .72 (18.4) | .49 (12.5) | .21 (5.4) | |
| PGSA-1519A | .039-.059 (1.0-1.5) | .748 (19.0) | .86 (21.8) | .59 (14.9) | .22 (5.7) | |
| PGSA-1822A | .031-.063 (0.8-1.6) | .866 (22.0) | .97 (24.6) | .69 (17.6) | .22 (5.6) | |
| PGSA-2024A1 | .031-.039 (0.8-1.0) | .945 (24.0) | 1.02 (26.0) | .79 (20.0) | .21 (5.4) | |
| PGSA-2024A | .039-.047 (1.0-1.2) | | 1.02 (26.0) | .79 (20.0) | .21 (5.3) | |
| PGSA-2327A | .016-.039 (0.4-1.0) | 1.063-1.071 (27.0-27.2) | 1.20 (30.6) | .91 (23.0) | .24 (6.0) | 200 |
| PGSA-2529A | .016-.043 (0.4-1.1) | 1.142 (29.0) | 1.28 (32.6) | .98 (25.0) | .28 (7.0) | 200 |

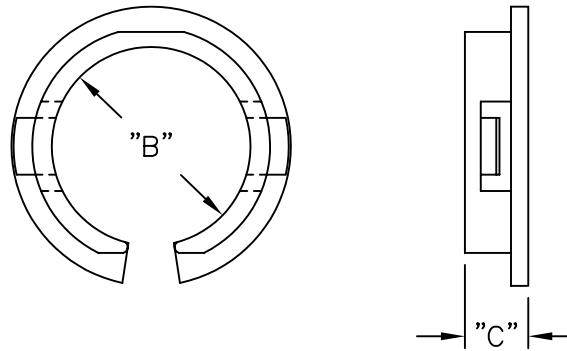

NOTES:

1. MATERIAL: NYLON 6/6 (RMS-01).
2. COLOR: BLACK.

| | | | | | | | |
|---|--|------------------|--|-------|-----------|--|------------|
| TITLE: OPEN/CLOSED BUSHINGS [A SERIES] | | DWG IN IN (MM) | | FINAL | | | |
| TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1° | | FILE # PGSA | DWN: P.B. | APP: | PART # | | PRINT TYPE |
| C | | MAT'L: SEE NOTES | DT: 07-18-95 | DT: | SEE TABLE | | CA |
| B | | RE: RICHCO, INC. | RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060 | | | | |
| A | | | | | | | |
| REV | | | | | | | |
| DESCRIPTION | | ENGR DATE | | | | | |