


Part Number	Description
<a href="#">TL-450</a>	Twist Lock,Natural,.40-.50" Hold



PART NO.	"A" REF. APPROXIMATE OVERALL HEIGHT	"B" REF. WIRE BUNDLE
TL-250	.90 (22.9)	.20-.30 (5.1-7.6)
TL-350	1.03 (26.2)	.30-.40 (7.6-10.2)
TL-450	1.20 (30.5)	.40-.50 (10.2-12.7)
TL-600	1.33 (33.7)	.55-.65 (14.0-16.5)
TL-750	1.55 (39.4)	.70-.80 (17.8-20.3)
TL-950	1.70 (43.4)	MAX 1.00 (25.4)
TL-1125	2.19 (55.6)	MAX 1-3/16 (30.2)
TL-1375	2.68 (68.1)	MAX 1-7/16 (36.5)
TL-1500	2.93 (74.4)	MAX 1-9/16 (39.7)
TL-1750	3.45 (87.6)	MAX 1-13/16 (46.0)

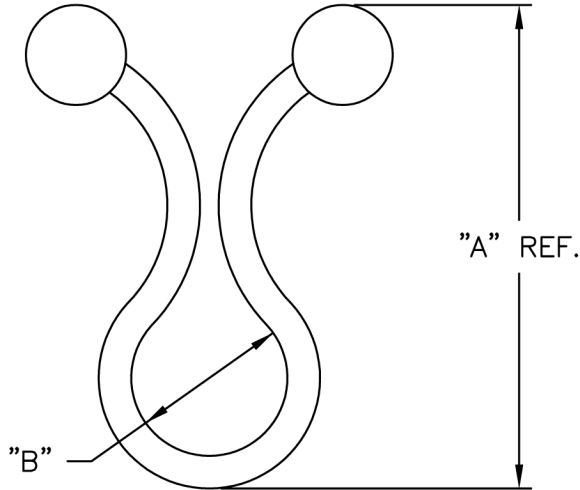

NOTES:

- MATERIAL: NYLON 6/6 (RMS-01).  
FLAME RETARDANT NYLON (RMS-19)  
AVAILABLE BY SPECIAL ORDER  
SPECIFIED MATERIALS COMPLY WITH STANDARD SS-00259-1.
- COLOR: NATURAL.
- BLACK, RED, GREEN, & YELLOW  
AVAILABLE BY SPECIAL ORDER.

G	SEE ECN #596 FOR CHANGES	SM 03.12.03	TITLE: TWIST-LOK					DWG IN	
F	ADDED FLAME RET. NOTE- ECN #516	SM 11.11.02						IN (MM)	
E	ADDED NOTE 3	SJ 03.13.02	DWN: P.B.				APP:	FINAL	PART #
D	CHANGED FILE NO. AND TITLE BLOCK	SM 05.31.01	TOLERANCES UNLESS NOTED	FILE # TL	DT: 03-22-94	DT:	SEE TABLE	PRINT TYPE	
C	RANGE OF 1125 THRU 1750 CHANGED	JP 8/15/94	.XX=±.010	MAT'L: SEE NOTES	RE: RICHCO, INC.	RICHCO INC.	CA		
B	"B" DIM TOLERANCE REMOVED	PB 8/8/94	.XXX=±.005						
A	P/N TL-600 AND 950 ADDED	JP 7/22/94	FRAC=±1/64						
REV	P/N TL-1125/1375/1500 AND 1750 ADDED	ENGR DATE	ANG=±1'						
	DESCRIPTION								