




V3S


Type	<ul style="list-style-type: none"> • Switches
Product type	<ul style="list-style-type: none"> • Burgess Sealed Miniature Micro switch
Typical markets	<ul style="list-style-type: none"> • material handling • building automation & security • transportation • distribution
Typical applications	<ul style="list-style-type: none"> • forklifts • alarm devices • specialist vehicles • international catalog distributors
Dimensions	<ul style="list-style-type: none"> • 32 x 24 x 10 mm
Characteristics	<ul style="list-style-type: none"> • sealed IP67 • flying leads • robust construction
Rating	<ul style="list-style-type: none"> • 250 VAC, 5 A
Actuators	<ul style="list-style-type: none"> • plunger • plain lever • roller lever
Approvals/Quality	<ul style="list-style-type: none"> • ENEC • UL • CSA



Dimensions

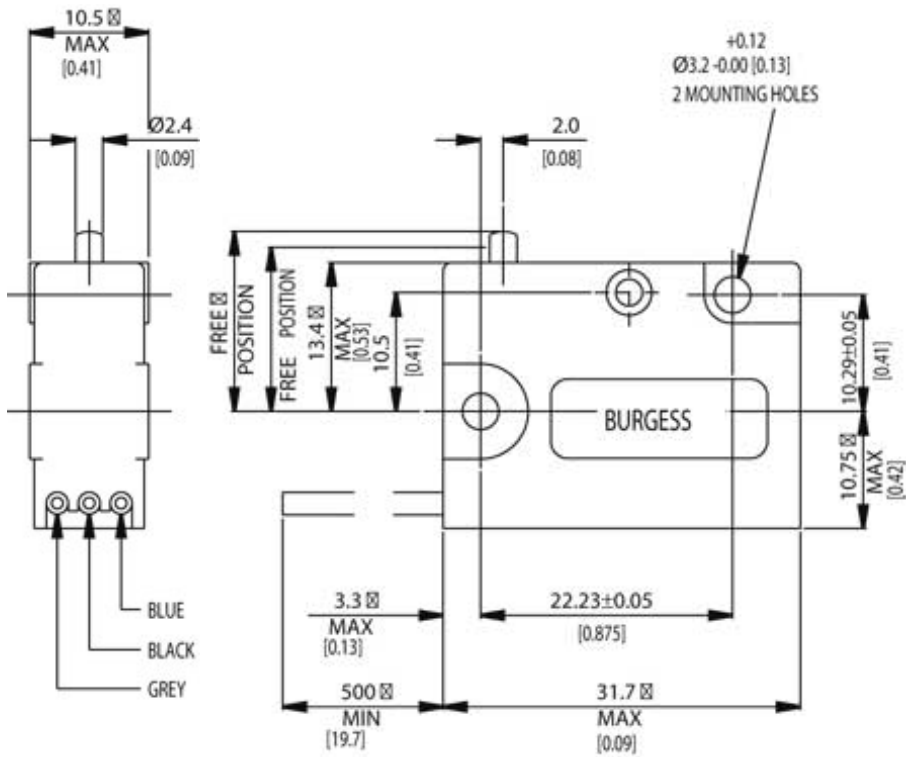

Circuits

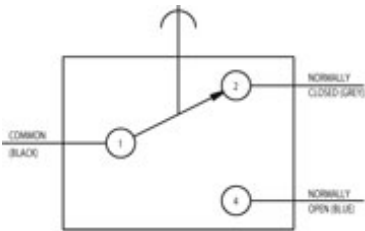

Performance

Preferred range

Partnumber	Terminal	Actuator	Electrical rating @	
			ENEC	UL/CSA
<u>V3SUL</u>	prewired	plunger	250 VAC 5	250 VAC 5
	0.5M		A	A
<u>V3SY1UL</u>	prewired	plain lever 26.2	250 VAC 5	250 VAC 5
	0.5M	mm	A	A
<u>V3SYRUL</u>	prewired	roller lever 11.7	250 VAC 5	250 VAC 5
	0.5M	mm	A	A

<u>V3SYR1UL</u>	rewired	roller lever 24.2	250 VAC 5	250 VAC 5
	0.5M	mm	A	A





V3SYRUL

Dimensions	32 mm
Dimensions	24 mm
Dimensions	10 mm
Terminal	prewired 0.5M
Circuit	CO
Protection	IP67
Actuator	roller lever 11.7 mm
Contacts	Ag
Electrical rating ENEC	250 VAC
Electrical rating UL/CSA	250 VAC
Actuating force	3.9 Nm
Release force	1.1 N
Free position (FP)	22.1 mm
Operating position (OP)	20.4 mm
Movement	0.4 mm
Overtravel	depress to case