


GLC75 Commercial/GLM75 Medical

75 Watt Single Output Global Performance Switchers

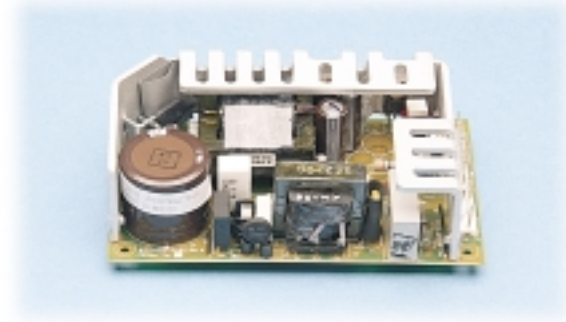

SPECIFICATIONS:

Ac Input

90-264 Vac, 47-63 Hz single phase.

Input Current

Maximum input current at 120 Vac, 60 Hz with full rated output load not to exceed 2.3 A.

Output Power

Normal continuous output power is 75 W for unrestricted natural convection cooling; 110 W with 26 cfm airflow.

Output Regulation

Regulation measured by changing from 5% to 50% load or 50% load to full load in either direction.

Overload Protection

Factory set to begin power limiting at approximately 120 W (GLC 75-5 is set at approximately 100 W). Fully protected against short circuit and output overload. Short circuit protection is cycling type power limit.

Output Noise

0.5% rms, 1% pk-pk, 20 MHz bandwidth, differential mode. Measured with noise probe directly across output terminals of the power supply.

Transient Response

Main Output: 500 μ s typical response time for return to within 0.5% of final value for a 50% load step change, $\Delta i/\Delta t < 0.2$ A/ μ s. Maximum voltage deviation is 3.5%. Startup/shutdown overshoot less than 3%.

Overvoltage Protection

Standard on all models.

Voltage Adjust

Factory set on standard unit; however, potentiometer adjusts voltage $\pm 5\%$ minimum. Consult factory for application assistance.


Efficiency

72-85% depending on model.

Input Protection

Internal ac fuse provided. Designed to blow only if a catastrophic failure occurs in the unit—fuse does not blow on overload or short circuit.

FEATURES:

- Cost-effective single-output power source
- 3.4" x 5.75" x 1.56" (meets 1U applications)
- Universal input 90-264 Vac
- 2-year warranty
- Complies with EN61000-3-2 Class A
- Also available in multiple output versions
- Conducted EMI exceeds FCC Class B and CISPR 22 Class B (Commercial models) and CISPR 11 Class B (Medical models)
- [Commercial Approved to UL1950, CSA22.2 No. 234 and IEC950, EN60950](#)
- [Medical Approved to UL2601-1, IEC601-1 and CSA22.2 No. 601](#)
-  marked to LVD

Inrush Current

Inrush limited by internal thermistors. Inrush at 240 Vac, averaged over the first ac half-cycle under cold start conditions will not exceed 37 A.

Temperature Coefficient

0.03%/°C typical on all outputs.

Power Fail

A standard TTL or CMOS compatible output goes low (< 0.5 V) 5ms before output voltage drops more than 4% below nominal voltage upon loss of ac power. Signal is factory set to trip on 84 to 94 Vac brown-out depending upon incoming line impedance and distortion. Other settings are available through adjustment of built-in potentiometer (consult factory for assistance). Output will stay low for 20 ms minimum.

EMI/EMC Compliance

All models include built-in EMI filtering to meet the following emissions requirements:

| EMI SPECIFICATIONS | COMPLIANCE LEVEL |
|---------------------------|-------------------------------------|
| Conducted Emissions GLC75 | EN55022 Class B; FCC Class B |
| Conducted Emissions GLM75 | EN55011 Class B; FCC Class B |
| Static Discharge | EN61000-4-2, 6 kV contact, 8 kV air |
| RF Field Susceptibility | EN61000-4-3, 3 V/meter |
| Fast Transients/Bursts | EN61000-4-4, 2 kV, 5 kHz |
| Surge Susceptibility | EN61000-4-5, 1 kV diff., 2 kV com. |
| Line Frequency Harmonics | EN61000-3-2 Class A |

Commercial Safety

All GLC models are approved to UL1950, CSA22.2 No. 234 Level 3, IEC950 and EN60950. Consult factory for approval status.

Medical Leakage Current

70 μ A 264 V @ 50 Hz (normal conditions).

Medical Safety

All GLM models are approved to UL2601-1, CSA-C22.2 No. 601.1, IEC601-1 and EN60601-1. Consult factory for approval status.

GLC75 Commercial/GLM75 Medical 75 Watt Single Output

| Commercial Model | Medical Model | Output | Output Minimum | Output Maximum (A) | Output Maximum (B) | Output Peak | V1 OVP Set | Noise P-P | Total Regulation |
|------------------|---------------|--------|----------------|--------------------|--------------------|-------------|--------------|-----------|------------------|
| GLC75-5 | GLM75-5 | 5.1 V | 0 A | 13.7 A | 19.6 A | 21 A | 6.2 ± 0.6 V | 50 mV | 1% |
| GLC75-12 | GLM75-12 | 12 V | 0 A | 6.3 A | 9.1 A | 9.5 A | 15.6 ± 1.1 V | 120 mV | 1% |
| GLC75-15 | GLM75-15 | 15 V | 0 A | 5 A | 7.3 A | 7.7 A | 18.5 ± 1.5 V | 150 mV | 1% |
| GLC75-24 | GLM75-24 | 24 V | 0 A | 3.1 A | 4.6 A | 5 A | 28 ± 2.5 V | 240 mV | 1% |
| GLC75-28 | GLM75-28 | 28 V | 0 A | 2.7 A | 4 A | 4.4 A | 34 ± 2.8 V | 280 mV | 1% |

A. Rating with unrestricted convection cooling. Total power not to exceed 75 W.
 B. Rating with 26 cfm forced-air cooling. Total power not to exceed 110 W.

GLC75/GLM75 MECHANICAL SPECIFICATIONS

INPUT: J1

AMP P/N: 643495-2
 0.312 CTRS CONNECTOR, 3 CIRCUIT
 PIN 1 AC GROUND
 PIN 3 AC NEUTRAL
 PIN 5 AC LINE

OUTPUT: J2

AMP P/N: 640445-9
 0.156 CTR HEADER

| PIN # | SINGLE OUTPUT MODELS |
|-------|----------------------|
| 1 | OUTPUT #1 |
| 2 | OUTPUT #1 |
| 3 | OUTPUT #1 |
| 4 | OUTPUT #1 |
| 5 | COMMON |
| 6 | COMMON |
| 7 | COMMON |
| 8 | COMMON |
| 9 | POWER FAIL |

MATING CONNECTOR AMP P/N'S


| | HOUSING |
|---------|----------|
| INPUT: | 640250-5 |
| OUTPUT: | 640250-9 |
| | CONTACT |
| INPUT: | 770476-1 |
| OUTPUT: | 770476-1 |

NOTE: 5A MAXIMUM RECOMMENDED CURRENT PER CONNECTOR PIN.

WEIGHT: 1.0 LBS. MAX. [0.45 kg]

TOLERANCES: X.XX=0.030 [0.76mm]

X.XXX=0.010 [0.25mm]

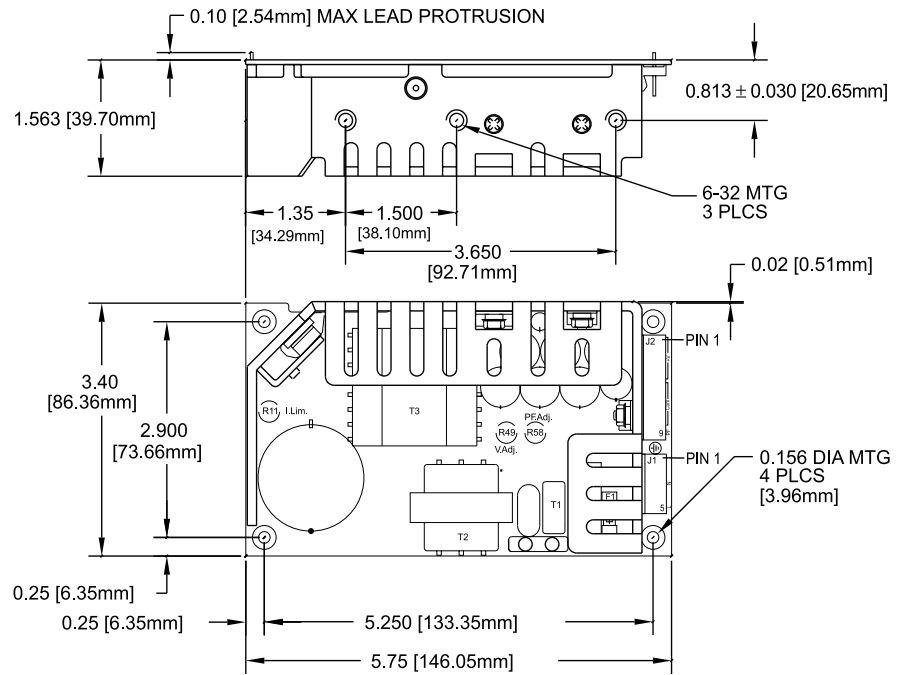

| Environmental Specification | Operating | Non-operating |
|-----------------------------|---|---|
| Temperature (A) | 0 to 50°C | -40 to +85°C |
| Humidity (A) | 0 to 95% RH | 0 to 95% RH |
| Shock (B) | 20 g _{pk} | 40 g _{pk} |
| Altitude | -500 to 10,000 ft | -500 to 40,000 ft |
| Vibration (C) | 1.5 g _{rms} , 0.003 g ² /Hz | 5 g _{rms} , 0.026 g ² /Hz |

- A. Units should be allowed to warm up/operate under non-condensing conditions before application of power.
- B. Random vibration—10 to 2000Hz, 6dB/octave roll-off from 350 to 2000Hz, 3 orthogonal axes. Tested for 10 min./axis operating and 1 hr./axis non-operating.
- C. Shock testing—half-sinusoidal, 10 ± 3 ms duration, ± direction, 3 orthogonal axes, total 6 shocks.